

BROOKE-G2-S

~20° spot beam compatible with LEDiL HEKLA.

SPECIFICATION:

Dimensions Ø 45.0
Height 18.9 mm
Fastening socket
ROHS compliant yes ①



MATERIALS:

ComponentTypeMaterialColourFinishCoatingBROOKE-G2-SReflectorPCmetalHMDS


ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg)

F14738_BROOKE-G2-S 720 45 45 4.8

» Box size: 480 x 280 x 300 mm



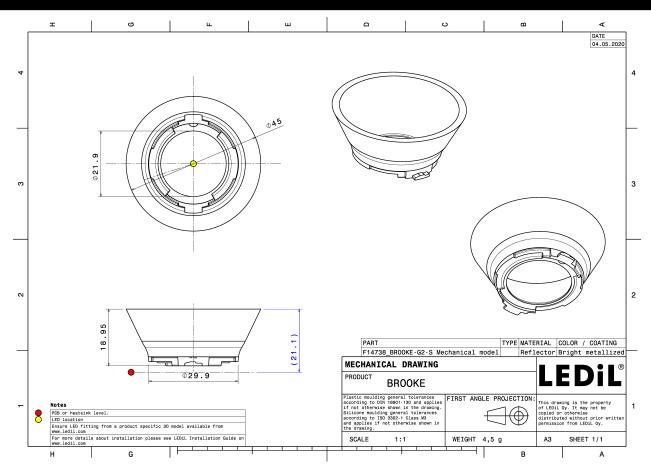


See also our general installation guide: www.ledil.com/installation_guide



bridgelux.


LED V10 Gen7
FWHM / FWTM 22.0° / 74.0°
Efficiency 88 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F15255_HEKLA-SOCKET-C
C14658_BARBARA-RZ-LENS

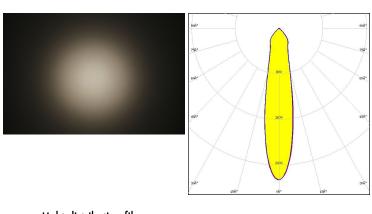

Light distribution files

bridgelux.


LED V4 HD Gen 7
FWHM / FWTM 13.0° / 32.0°
Efficiency 90 %
Peak intensity 5.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F15253_HEKLA-SOCKET-A
C14658_BARBARA-RZ-LENS

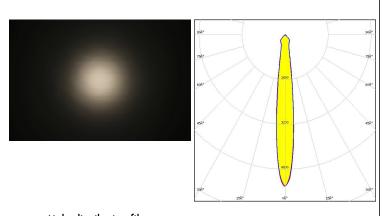

Light distribution files

bridgelux.

LED V4 HD Gen 7
FWHM / FWTM 8.8° / 16.5°
Efficiency 94 %
Peak intensity 12.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15253_HEKLA-SOCKET-A

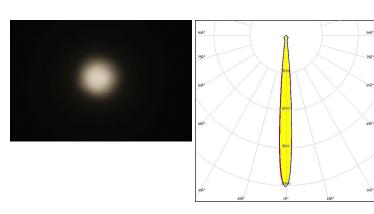


Light distribution files









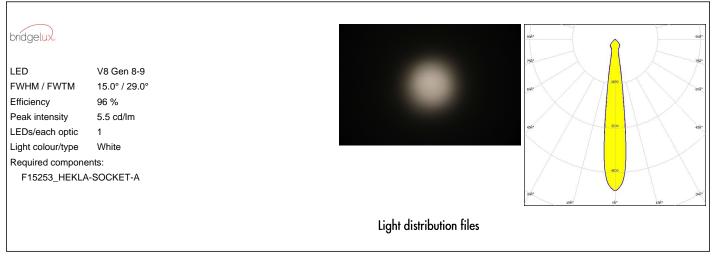



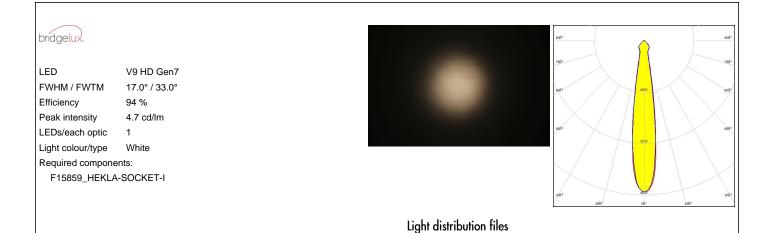




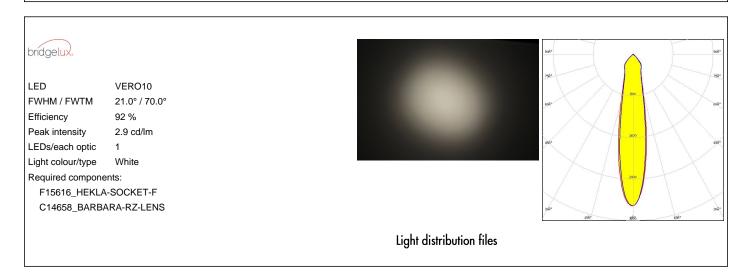






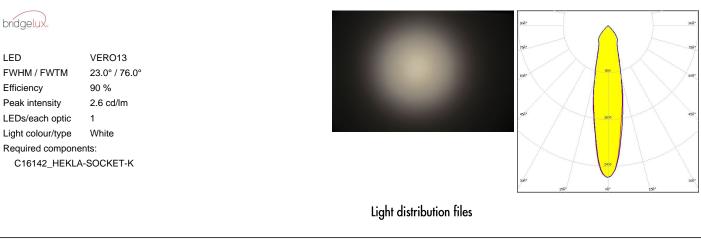

Light distribution files

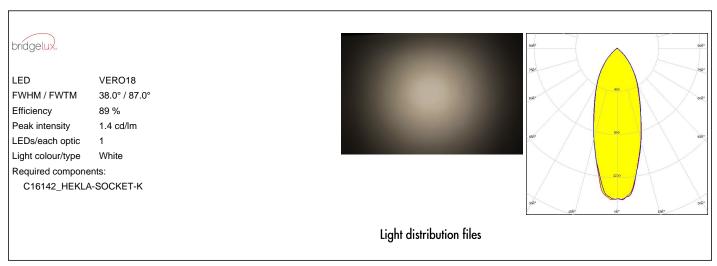






LED Vesta DTW 13mm (21W)

FWHM / FWTM 27.0° / 80.0°
Efficiency 90 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 491 Typ L8

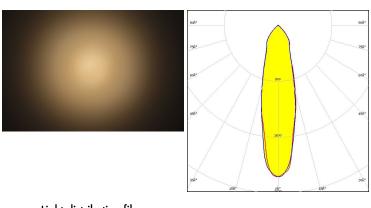

Light distribution files




LED Vesta DTW 13mm (21W)

FWHM / FWTM 32.0° / 85.0°
Efficiency 85 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 491 Typ L8

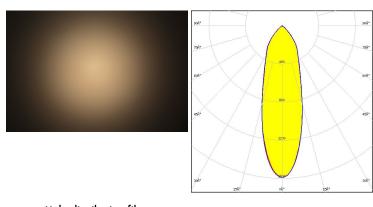

Light distribution files



LED Vesta DTW 15mm (33W)

FWHM / FWTM 33.0° / 85.0°

Efficiency 84 %


Peak intensity 1.5 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 491 Typ L8

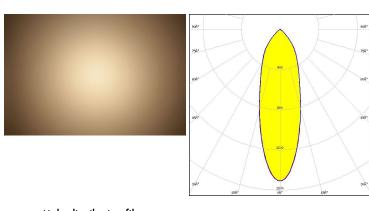

Light distribution files





LED Vesta DTW 15mm (33W)

FWHM / FWTM 27.0° / 79.0°
Efficiency 91 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C16142_HEKLA-SOCKET-K

Bender Wirth: 491 Typ L8

Light distribution files



LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM 22.0° / 72.0°
Efficiency 87 %


Peak intensity 2.7 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 490 Typ L8

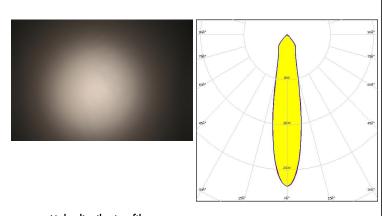


Light distribution files



LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM 18.0° / 38.0°
Efficiency 92 %
Peak intensity 4.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8

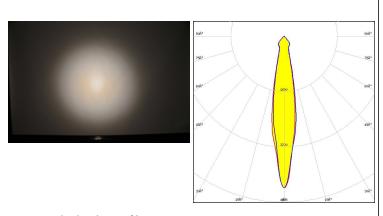

Light distribution files






LED Vesta TW 13mm (25W) CSP

FWHM / FWTM 30.0° / 82.0°
Efficiency 85 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
C16142 HEKI A-SOCKET-K

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 492 Typ L8

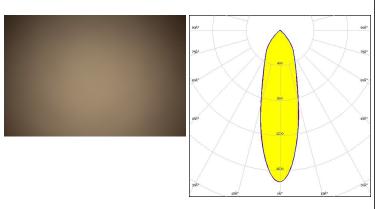

Light distribution files




LED Vesta TW 6mm DP

FWHM / FWTM 17.0° / 49.0°
Efficiency 85 %
Peak intensity 3.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 504 Typ L8





Light distribution files




LED Vesta TW 6mm DP

 $\begin{array}{ll} \text{FWHM / FWTM} & \quad 13.0^{\circ} \, / \, 26.0^{\circ} \\ \text{Efficiency} & \quad 90 \, \% \end{array}$

Peak intensity 6.8 cd/lm LEDs/each optic 1
Light colour/type White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 504 Typ L8





Light distribution files






Vesta TW 9mm (12W) CSP

FWHM / FWTM 23.0° / 76.0° Efficiency 85 % Peak intensity 2.4 cd/lm LEDs/each optic White Light colour/type Required components: C16142_HEKLA-SOCKET-K

C14658_BARBARA-RZ-LENS Bender Wirth: 489 Typ L8

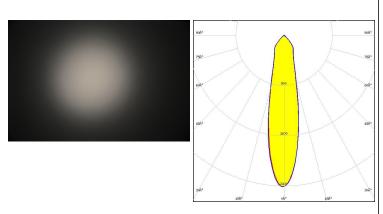


Light distribution files

CITIZEN

CLC020 Series (Dim-To-Warm)

FWHM / FWTM 26.0° / 81.0° Efficiency 84 % Peak intensity 2 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 487 Typ L8

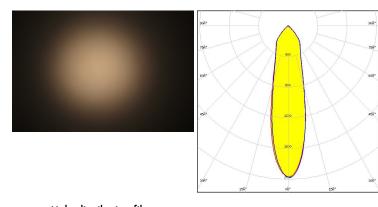

Light distribution files


CITIZEN

LED CLC030 Series (Dim-To-Warm)

FWHM / FWTM 30.0° / 84.0°

Efficiency % Peak intensity 1.6 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 436 Typ L8

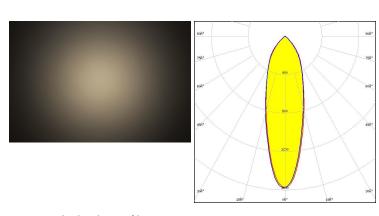

Light distribution files




CITIZEN

LED CLC030 Series (Dim-To-Warm)

FWHM / FWTM 23.0° / 78.0°
Efficiency 89 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C16142_HEKLA-SOCKET-K

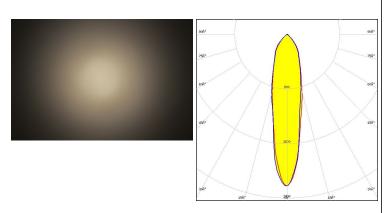

Light distribution files

CITIZEN

LED CLU02x (LES10)
FWHM / FWTM 16.0° / 33.0°
Efficiency 94 %

Peak intensity 4.8 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15255_HEKLA-SOCKET-C

CITIZEN


LED CLU02x (LES10)

FWHM / FWTM 16.0° / 33.0° Efficiency 94 %

Peak intensity 4.8 cd/lm LEDs/each optic 1

Light colour/type White Required components:

F15255_HEKLA-SOCKET-C

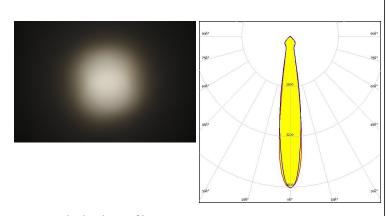

Light distribution files




CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 17.0° / 47.0°
Efficiency 90 %
Peak intensity 3.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15255_HEKLA-SOCKET-C

C14658_BARBARA-RZ-LENS

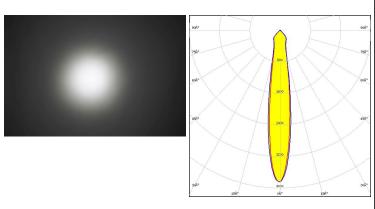


Light distribution files

CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 12.0° / 22.0°
Efficiency 94 %
Peak intensity 7.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15255_HEKLA-SOCKET-C

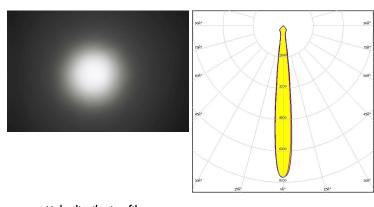


Light distribution files

CITIZEN

LED CLU7A2/7A3
FWHM / FWTM 8.0° / 15.0°
Efficiency 94 %
Peak intensity 15.9 cd/lm
LEDs/each optic 1

Light colour/type White Required components:

F15255_HEKLA-SOCKET-C

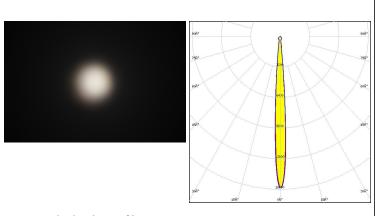

Light distribution files




CITIZEN

LCN-C01B (Tunable White) LED

FWHM / FWTM 25.0° / 79.0° Efficiency 86 % Peak intensity 2.2 cd/lm LEDs/each optic White Light colour/type Required components: C16142_HEKLA-SOCKET-K

C14658_BARBARA-RZ-LENS Bender Wirth: 481 Typ L8

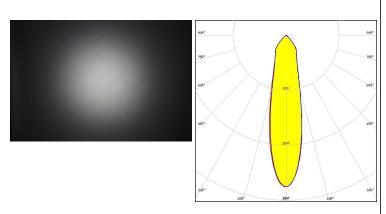


Light distribution files

CITIZEN

LCN-C02B (Tunable White)

FWHM / FWTM 27.0° / 79.0° Efficiency 89 % Peak intensity 2.3 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K

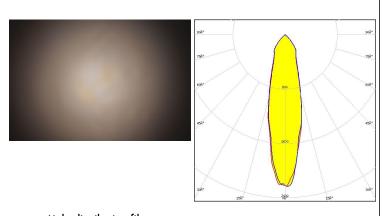


Light distribution files

CITIZEN

LED LCN-C02B (Tunable White)

FWHM / FWTM 32.0° / 85.0° Efficiency 84 % Peak intensity 1.6 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 481 Typ L8

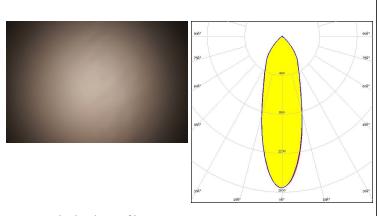


Light distribution files



CREE \$

LED CMA1516 18.0° / 36.0° FWHM / FWTM Efficiency 94 % Peak intensity 4.2 cd/lm LEDs/each optic White Light colour/type Required components: F15256_HEKLA-SOCKET-D

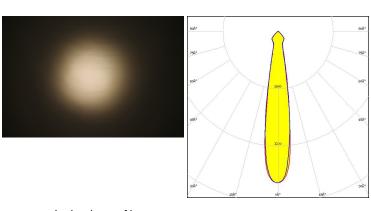


Light distribution files

CREE \$

CMA1825 FWHM / FWTM 24.0° / 76.0° Efficiency 94 % Peak intensity 2.7 cd/lm LEDs/each optic Light colour/type White Required components: F15254_HEKLA-SOCKET-B






Light distribution files

CREE \$

LED CMT14xx $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 19.0° / 41.0° Efficiency 95 % Peak intensity 3.8 cd/lm LEDs/each optic Light colour/type White Required components: F15255_HEKLA-SOCKET-C





Light distribution files



CREE +

 LED
 CXA/B 13xx

 FWHM / FWTM
 11.0° / 22.0°


 Efficiency
 94 %

 Peak intensity
 8.2 cd/lm

 LEDs/each optic
 1

 Light colour/type
 White


 Required components
 F15956_HEKLA-SOCKET-J

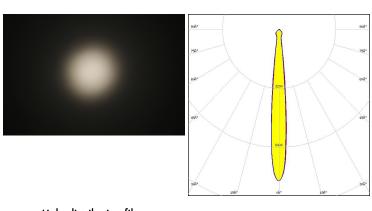

Light distribution files

CREE \$

LED CXA/B 15xx
FWHM / FWTM 16.0° / 36.0°
Efficiency 94 %
Peak intensity 4.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15256_HEKLA-SOCKET-D

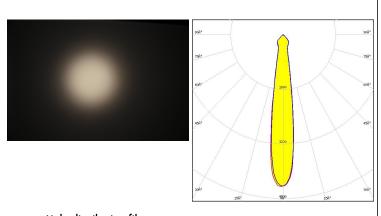


Light distribution files

DESCRIPTION

LED LUXEON CX Plus CoB L08 (Gen2)

FWHM / FWTM 29.0° / 83.0°
Efficiency 92 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
Bender Wirth: 637a Hekla

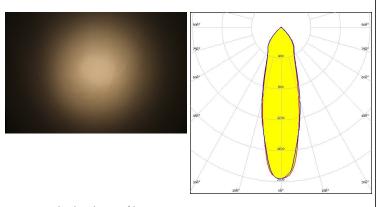

Light distribution files



MUMILEDS

LED LUXEON CX Plus CoB L08 (Gen2)

FWHM / FWTM 35.0° / 87.0°
Efficiency 84 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C14658_BARBARA-RZ-LENS Bender Wirth: 637a Hekla



Light distribution files

UMILEDS

LED LUXEON CoB 1202HD

FWHM / FWTM 13.0° / 23.0°

Efficiency 95 %

Peak intensity 7.5 cd/lm


LEDs/each optic 1

Light colour/type White

Required components:

F15848_HEKLA-SOCKET-G

۰




Light distribution files

DESCRIPTION

LED LUXEON CoB 1204HD

FWHM / FWTM 18.0° / 35.0°
Efficiency 96 %
Peak intensity 4.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15858_HEKLA-SOCKET-H





Light distribution files




MUMILEDS

LED LUXEON CoB 1205HD

FWHM / FWTM 22.0° / 58.0°
Efficiency 94 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15858_HEKLA-SOCKET-H

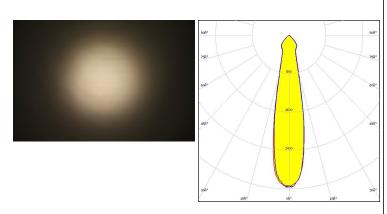


Light distribution files



LED LUXEON CoB 1208 FWHM / FWTM 29.0° / 82.0° Efficiency 92 %

Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Bender Wirth: 632a Hekla XL

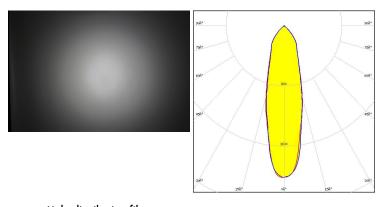


Light distribution files

DESCRIPTION

LED LUXEON CX Plus CoB - HD S01H4

FWHM / FWTM 18.0° / 54.0°
Efficiency 86 %
Peak intensity 3.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C14658_BARBARA-RZ-LENS Bender Wirth: 634c Hekla

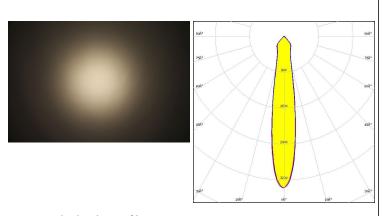


Light distribution files



MILEDS

LED LUXEON CX Plus CoB - HD S01H4

FWHM / FWTM 13.0° / 23.0°
Efficiency 93 %
Peak intensity 7.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
Bender Wirth: 634c Hekla

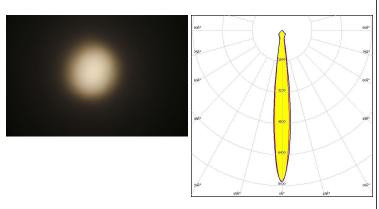


Light distribution files



LED LUXEON CX Plus CoB - HD S02H6

FWHM / FWTM 14.0° / 25.0°
Efficiency 93 %
Peak intensity 7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
Bender Wirth: 634c Hekla

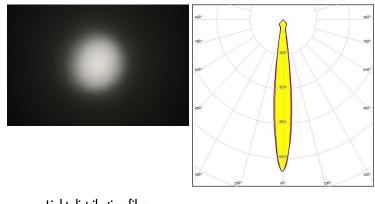


Light distribution files

DESCRIPTION

LED LUXEON CX Plus CoB - HD S02H6

FWHM / FWTM 20.0° / 60.0°
Efficiency 86 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C14658_BARBARA-RZ-LENS Bender Wirth: 634c Hekla

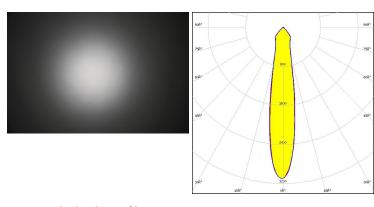


Light distribution files



LUMILEDS

LUXEON CX Plus CoB - HD S04H9

FWHM / FWTM 18.0° / 40.0° Efficiency 93 % Peak intensity 4 cd/lm LEDs/each optic White Light colour/type Required components: Bender Wirth: 634c Hekla

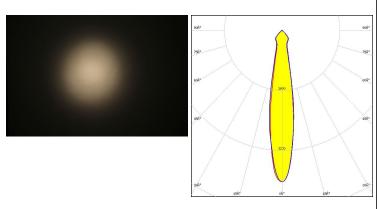


Light distribution files



LUXEON CX Plus CoB - HD S04H9

FWHM / FWTM 23.0° / 78.0° Efficiency 86 % Peak intensity 2.4 cd/lm LEDs/each optic Light colour/type White Required components:

C14658_BARBARA-RZ-LENS Bender Wirth: 634c Hekla

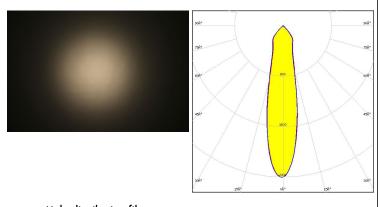


Light distribution files

MUMILEDS

LED LUXEON CX Plus CoB L04 / L05 (Gen2)

FWHM / FWTM 28.0° / 83.0° Efficiency 85 % Peak intensity 1.9 cd/lm LEDs/each optic Light colour/type White Required components:

C14658_BARBARA-RZ-LENS Bender Wirth: 637a Hekla

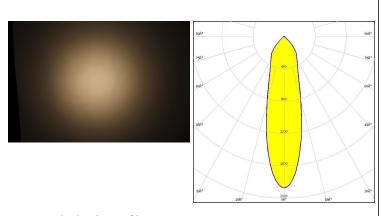

Light distribution files


Published: 02/05/2018



LUMILEDS

LUXEON CX Plus CoB L04 / L05 (Gen2)

FWHM / FWTM 23.0° / 75.0° Efficiency 92 % Peak intensity 2.8 cd/lm LEDs/each optic White Light colour/type Required components: Bender Wirth: 637a Hekla

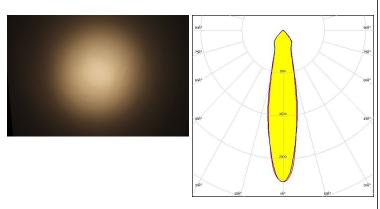


Light distribution files



LUXEON CX Plus CoB M02 / M03 (Gen2)

FWHM / FWTM 17.0° / 38.0° Efficiency 92 % Peak intensity 4.4 cd/lm LEDs/each optic Light colour/type White Required components:

Bender Wirth: 641a Hekla

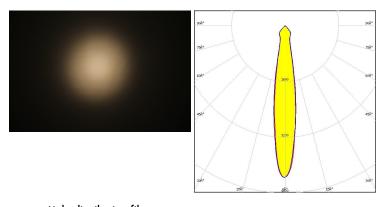


Light distribution files

LUMILEDS

LED LUXEON CX Plus CoB M02 / M03 (Gen2)

FWHM / FWTM 23.0° / 77.0° Efficiency 86 % Peak intensity 2.5 cd/lm LEDs/each optic Light colour/type White Required components:

C14658_BARBARA-RZ-LENS Bender Wirth: 641a Hekla

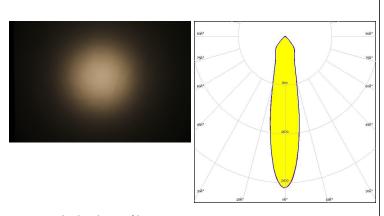

Light distribution files




LUMILEDS

LUXEON CX Plus CoB S01 (Gen2)

FWHM / FWTM 19.0° / 56.0° Efficiency 86 % Peak intensity 3.3 cd/lm LEDs/each optic White Light colour/type Required components:

C14658_BARBARA-RZ-LENS Bender Wirth: 634c Hekla

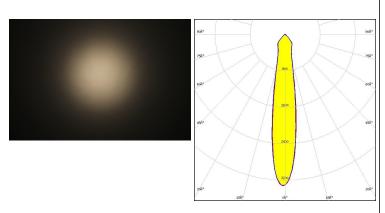

Light distribution files



LUXEON CX Plus CoB S01 (Gen2)

FWHM / FWTM 12.0° / 24.0° Efficiency 93 % Peak intensity 7.4 cd/lm LEDs/each optic Light colour/type White Required components:

Bender Wirth: 634c Hekla


Light distribution files



LED CDM-14 (Dim-To-Warm)

FWHM / FWTM 28.0° / 81.0° Efficiency 83 % Peak intensity 1.8 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 491 Typ L8

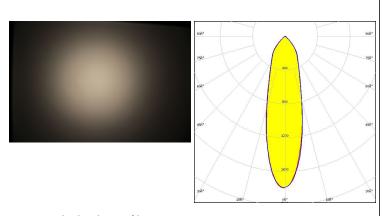

Light distribution files





LED CDM-6 (Dim-To-Warm)

FWHM / FWTM 18.0° / 45.0°

Efficiency 86 %

Peak intensity 3.6 cd/lm


LEDs/each optic 1

Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 490 Typ L8

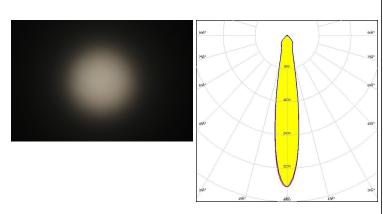

Light distribution files



LED CDM-9 (Dim-To-Warm)

FWHM / FWTM 17.0° / 35.0°

Efficiency 90 %


Peak intensity 4.8 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8

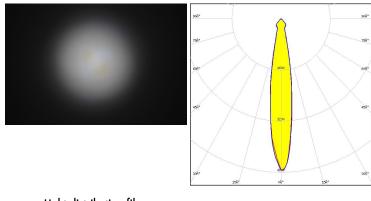


Light distribution files



LED CDM-9 (Dim-To-Warm)

FWHM / FWTM 21.0° / 56.0°
Efficiency 85 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 490 Typ L8

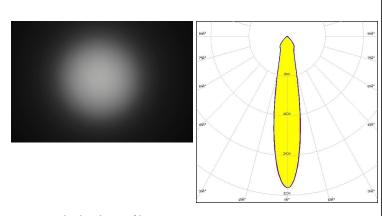

Light distribution files





LED CTM-9 (Tunable White)

FWHM / FWTM 22.0° / 65.0°

Efficiency 85 %

Peak intensity 2.8 cd/lm


LEDs/each optic 1

Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 495 Typ L8

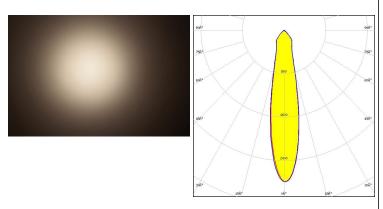

Light distribution files



 LED
 CxM-14 (19x19)

 FWHM / FWTM
 29.0° / 83.0°


 Efficiency
 94 %

 Peak intensity
 2.1 cd/lm

 LEDs/each optic
 1

Light colour/type White
Required components:

F15859_HEKLA-SOCKET-I

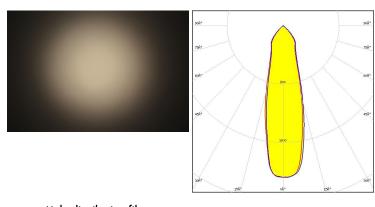


Light distribution files



LED CXM-4
FWHM / FWTM 9.0° / 16.0°
Efficiency 94 %
Peak intensity 13.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F15255_HEKLA-SOCKET-C

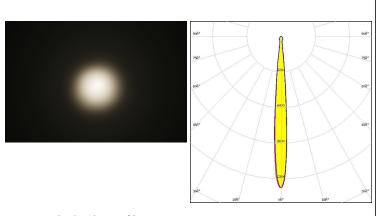

Light distribution files


Published: 02/05/2018





EED CXM-4
FWHM / FWTM 14.0° / 35.0°
Efficiency 89 %
Peak intensity 4.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS

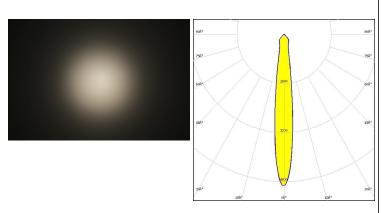

Light distribution files




LED CxM-9 (13.5x13.5) FWHM / FWTM 18.0° / 44.0°

Efficiency 94 %
Peak intensity 3.9 cd/lm
LEDs/each optic 1

Light colour/type White Required components:

F15255_HEKLA-SOCKET-C

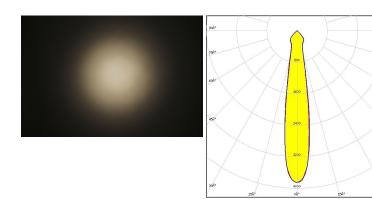


Light distribution files



LED NJCWL024Z-V1MT: COB L-Type Tunable White

FWHM / FWTM 15.0° / 31.0°
Efficiency 86 %
Peak intensity 5.1 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 497 Typ L8

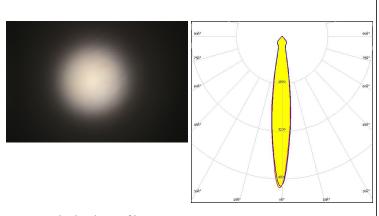

Light distribution files

24/43




WNICHIA

NJCWL024Z-V1MT: COB L-Type Tunable White

FWHM / FWTM 18.0° / 57.0° Efficiency 81 % Peak intensity 3.1 cd/lm LEDs/each optic White Light colour/type Required components: C16142_HEKLA-SOCKET-K

C14658_BARBARA-RZ-LENS Bender Wirth: 497 Typ L8

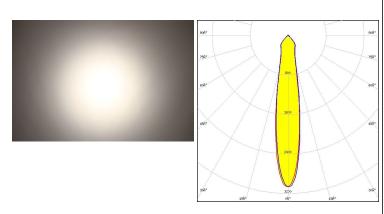


Light distribution files




NVCWJ024Z-V1MT: COB J-Type Tunable White

FWHM / FWTM 25.0° / 79.0° Efficiency 85 % Peak intensity 2.2 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 498 Typ L2






Light distribution files

LED Fortimo SLM L09 CoB

FWHM / FWTM 18.0° / 38.0° Efficiency 94 % Peak intensity 4.2 cd/lm LEDs/each optic Light colour/type White Required components: F15858_HEKLA-SOCKET-H



Light distribution files



PHILIPS

LED Fortimo SLM L09 CoB

FWHM / FWTM 21.0° / 70.0°

Efficiency 89 %

Peak intensity 2.8 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:

F15858_HEKLA-SOCKET-H

C14658_BARBARA-RZ-LENS

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°

900°


Light distribution files

PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 27.0° / 80.0°
Efficiency 89 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

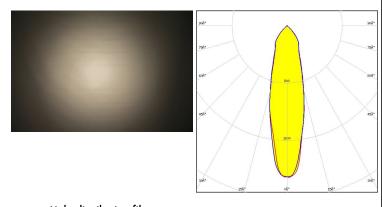

Light distribution files

PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 32.0° / 85.0°
Efficiency 85 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 432 Typ L8



Light distribution files




SAMSUNG

LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 22.0° / 70.0° Efficiency 90 % Peak intensity 2.8 cd/lm LEDs/each optic White Light colour/type Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS



Light distribution files

SAMSUNG

LC003D / LC006D / LC009D / LC013D


FWHM / FWTM 18.0° / 37.0° Efficiency 94 % Peak intensity 4.3 cd/lm LEDs/each optic Light colour/type White Required components:

F15255_HEKLA-SOCKET-C

SAMSUNG

LC003D / LC006D / LC009D / LC013D LED

FWHM / FWTM 18.0° / 37.0° Efficiency 94 % Peak intensity 4.3 cd/lm LEDs/each optic Light colour/type White Required components: F15255_HEKLA-SOCKET-C

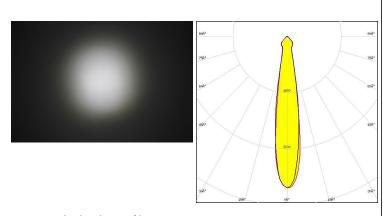


Light distribution files



SAMSUNG

LC010C G2 FWHM / FWTM 11.0° / 20.0° Efficiency 93 % Peak intensity 9 cd/lm LEDs/each optic White Light colour/type Required components:

F15255_HEKLA-SOCKET-C

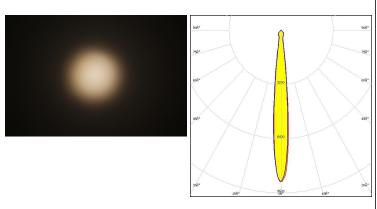

Light distribution files

SAMSUNG

LC010T (Tunable White)


FWHM / FWTM 18.0° / 43.0° Efficiency 91 % Peak intensity 3.9 cd/lm

LEDs/each optic

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

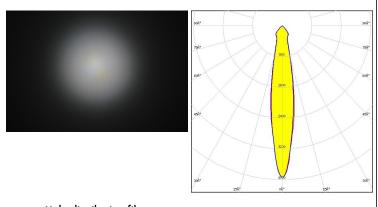

Light distribution files

SAMSUNG


LED LC010T (Tunable White)

FWHM / FWTM 23.0° / 75.0° Efficiency 86 % Peak intensity 2.5 cd/lm LEDs/each optic

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 501 Typ L8

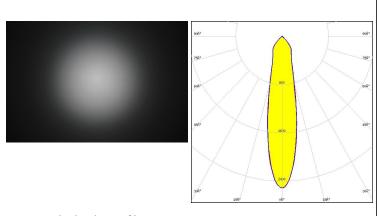


Light distribution files



SAMSUNG

LED LC020C G2
FWHM / FWTM 17.0° / 35.0°
Efficiency 94 %
Peak intensity 4.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15859_HEKLA-SOCKET-I

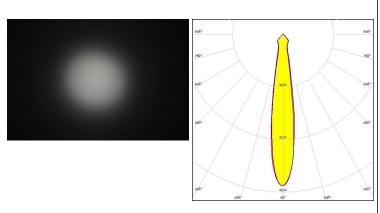

Light distribution files

SAMSUNG


LED LC020T (Tunable white)

FWHM / FWTM 26.0° / 78.0° Efficiency 90 % Peak intensity 2.4 cd/lm

LEDs/each optic 1
Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

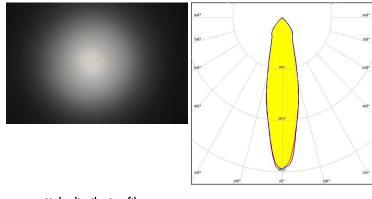

Light distribution files

SAMSUNG


LED LC020T (Tunable white)

FWHM / FWTM 31.0° / 84.0° Efficiency 85 % Peak intensity 1.6 cd/lm LEDs/each optic 1

Light colour/type Tunable White


Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 501 Typ L8

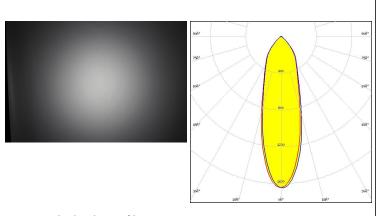

Light distribution files




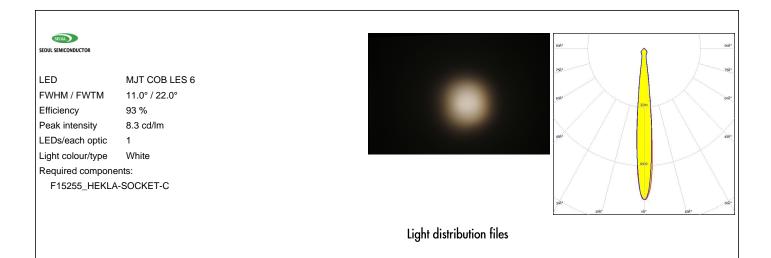



MJT COB LES 9.8 FWHM / FWTM 20.0° / 58.0° Efficiency 92 % Peak intensity 3.3 cd/lm LEDs/each optic Light colour/type White Required components:

F15255_HEKLA-SOCKET-C




Light distribution files

TRIDONIC

LED SLE G7 LES09 FWHM / FWTM 17.0° / 34.0° Efficiency 94 % Peak intensity 4.8 cd/lm LEDs/each optic Light colour/type White

Required components: F15255_HEKLA-SOCKET-C

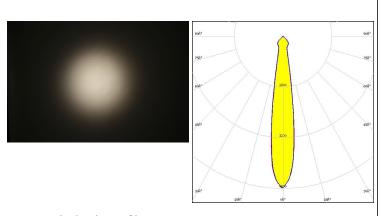


Light distribution files

Published: 02/05/2018



TRIDONIC


SLE G7 LES09 FWHM / FWTM 20.0° / 63.0° Efficiency 91 % Peak intensity 3.1 cd/lm LEDs/each optic White Light colour/type Required components: F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS

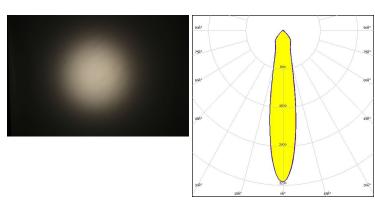

Light distribution files

TRIDONIC


SLE G7 LES13 FWHM / FWTM 29.0° / 83.0° Efficiency 87 % Peak intensity 1.8 cd/lm LEDs/each optic Light colour/type White Required components: F15859_HEKLA-SOCKET-I C14658_BARBARA-RZ-LENS

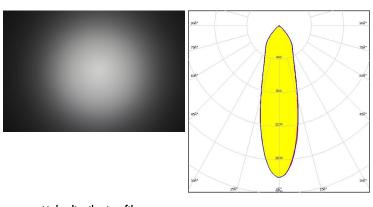

Light distribution files

TRIDONIC

LED SLE G7 LES13 FWHM / FWTM 26.0° / 78.0° Efficiency 94 % Peak intensity 2.5 cd/lm LEDs/each optic Light colour/type White Required components: F15859_HEKLA-SOCKET-I

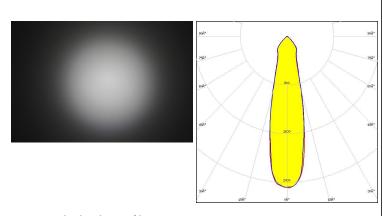


Light distribution files



TRIDONIC

LED SLE G7 LES15
FWHM / FWTM 28.0° / 81.0°
Efficiency 94 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


F15859_HEKLA-SOCKET-I

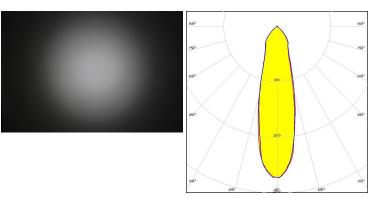

Light distribution files

XICATO

LED XOB 14.5 mm
FWHM / FWTM 27.0° / 82.0°
Efficiency 94 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15859_HEKLA-SOCKET-I

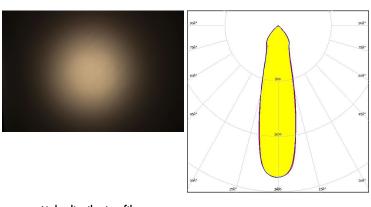


Light distribution files

XICATO

LED XOB 6 mm
FWHM / FWTM 15.0° / 41.0°
Efficiency 88 %
Peak intensity 4.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS

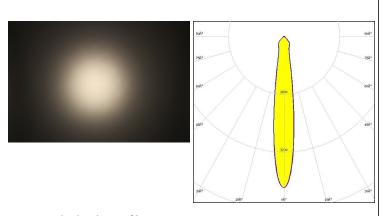

Light distribution files



XICATO

 LED
 XOB 6 mm

 FWHM / FWTM
 11.0° / 21.0°


 Efficiency
 94 %

 Peak intensity
 8.7 cd/lm

 LEDs/each optic
 1

 Light colour/type
 White


 Required components:
 F15255_HEKLA-SOCKET-C

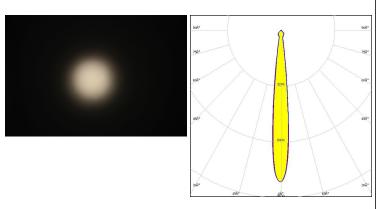

Light distribution files

XICATO


LED XOB 9.8 mm
FWHM / FWTM 21.0° / 69.0°
Efficiency 90 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F15255_HEKLA-SOCKET-C
C14658_BARBARA-RZ-LENS

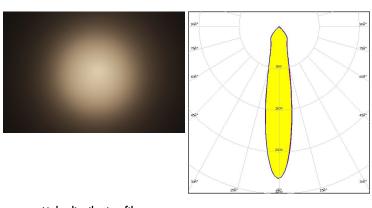

Light distribution files

XICATO

LED XOB 9.8 mm
FWHM / FWTM 16.0° / 35.0°
Efficiency 94 %
Peak intensity 4.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15255_HEKLA-SOCKET-C

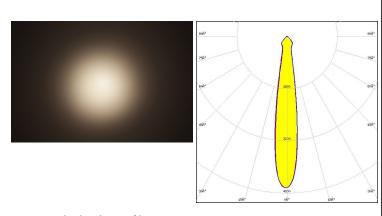


Light distribution files



XICATO

LED XTM - 19mm LES
FWHM / FWTM 33.0° / 86.0°
Efficiency 92 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C15743_XTM-ADAPTER-50-B

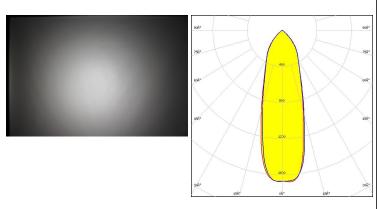


Light distribution files

XICATO

LED XTM - 9mm LES
FWHM / FWTM 17.0° / 33.0°
Efficiency 94 %
Peak intensity 4.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

C15743_XTM-ADAPTER-50-B

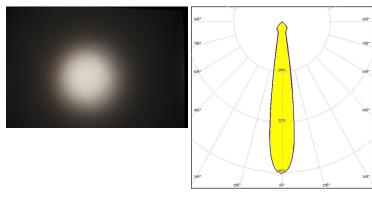

Light distribution files



bridgelux

V10 Gen6 LED FWHM / FWTM 15.0° / 32.0°

Efficiency % LEDs/each optic 1 White Light colour/type

Required components:

F14988_HEKLA-SOCKET-E

bridgelux

V10 Gen6 LED FWHM / FWTM 15.0° Efficiency 0 % LEDs/each optic Light colour/type White

Required components:


F14988_HEKLA-SOCKET-E



V13 Gen6 FWHM / FWTM 24.0° / 70.0° Efficiency 92 % Peak intensity 2.8 cd/lm LEDs/each optic Light colour/type White

Required components:

F14988_HEKLA-SOCKET-E



Light distribution files



bridgelux

LED V8 Gen6 FWHM / FWTM 15.0° / 32.0°

Efficiency 0 %
LEDs/each optic 1
Light colour/type White

Required components:

F15253_HEKLA-SOCKET-A

bridgelux.

 LED
 V8 Gen7

 FWHM / FWTM
 14.0° / 28.0°


 Efficiency
 92 %

 Peak intensity
 5.7 cd/lm

LEDs/each optic 1
Light colour/type White

Required components:

F15253_HEKLA-SOCKET-A



Light distribution files

bridgelux.

LED Vesta TW 9mm (9W) DP

FWHM / FWTM 18.0° / 45.0°
Efficiency 87 %
Peak intensity 3.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS

Light distribution files

Bender Wirth: 489 Typ L8

Published: 02/05/2018



CITIZEN

 LED
 CLU02x (LES10)

 FWHM / FWTM
 18.0° / 36.0°

 Efficiency
 92 %


White

Peak intensity 4.3 cd/lm LEDs/each optic 1

Required components:

Light colour/type

F15255_HEKLA-SOCKET-C



Light distribution files

CITIZEN


LED CLU02x (LES10) FWHM / FWTM 18.0° / 48.0°

Efficiency 86 % Peak intensity 3.4 cd/lm

LEDs/each optic 1
Light colour/type White

Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS




Light distribution files

CREE -

LED CMT14xx
FWHM / FWTM 17.0° / 35.0°
Efficiency 90 %
Peak intensity 4.2 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15255_HEKLA-SOCKET-C



Light distribution files



CREE -

LED CXA/B 15xx
FWHM / FWTM 15.0°
Efficiency 0 %
LEDs/each optic 1
Light colour/type White
Required components:
F15256_HEKLA-SOCKET-D

CREE +

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM / FWTM 22.0°
Efficiency %
LEDs/each optic 1
Light colour/type White

Required components:

F15254_HEKLA-SOCKET-B

CREE \$

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM / FWTM 22.0°
Efficiency 0 %
LEDs/each optic 1
Light colour/type White
Required components:

F15254_HEKLA-SOCKET-B






LFD CXM-3 FWHM / FWTM 6.0° / 12.0° Efficiency 93 % Peak intensity 25.2 cd/lm

LEDs/each optic Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K

Light distribution files Bender Wirth: 434 Typ L8




ELUMINUS

LFD CXM-4 FWHM / FWTM 8.0° / 16.0° Efficiency 92 % Peak intensity 15.2 cd/lm LEDs/each optic 1

Light colour/type White Required components:

F17435_HEKLA-G2-C




Light distribution files



CxM-6 (13.5x13.5) FWHM / FWTM 12.0° / 24.0° Efficiency 93 % Peak intensity 7.9 cd/lm

LEDs/each optic Light colour/type White

Required components: F17435_HEKLA-G2-C



Light distribution files



WNICHIA

LED COB L-Type (LES 11)


 FWHM / FWTM
 20.0° / 51.0°

 Efficiency
 93 %

 Peak intensity
 3.3 cd/lm

LEDs/each optic 1
Light colour/type White

Required components: F15858_HEKLA-SOCKET-H



Light distribution files




LED COB L-Type (LES 9)

FWHM / FWTM 16.0° / 30.0°
Efficiency 93 %
Peak intensity 5.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15858_HEKLA-SOCKET-H




Light distribution files



LED COB T-Type
FWHM / FWTM 12.0° / 21.0°
Efficiency 91 %
Peak intensity 9 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15848_HEKLA-SOCKET-G



Light distribution files




WNICHIA

LFD NFSWE11A $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 14.0° / 28.0° Efficiency 86 % Peak intensity 5.7 cd/lm LEDs/each optic 30 Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K




Light distribution files

OSRAM Opto Semiconductore

Soleriq S13 19x19 LFD FWHM / FWTM 23.9° / 70.4° Efficiency 93 % Peak intensity 2.7 cd/lm LEDs/each optic 1 Light colour/type White

Required components:

F15859_HEKLA-SOCKET-I




Light distribution files

OSRAM

Soleriq S9 FWHM / FWTM 17.4° / 36.5° Efficiency 93 % Peak intensity 4.4 cd/lm LEDs/each optic Light colour/type White

Required components:

F15255_HEKLA-SOCKET-C



Light distribution files



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 29.0° / 82.1°

Efficiency 88 %


Peak intensity 1.9 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:

F15859_HEKLA-SOCKET-I



Light distribution files

Published: 02/05/2018



PRODUCT DATASHEET F14738_BROOKE-G2-S

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 7 FI-24100 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

43/43

www.ledil.com/ where_to_buy