

FLORENCE-3R-IP-Z60

~60° wide beam

SPECIFICATION:

| | |
|----------------------------|--------------|
| Dimensions | 321.0 x 79.0 |
| Height | 9.4 mm |
| Fastening | screw |
| Ingress protection classes | IP67 |
| ROHS compliant | yes ⓘ |


MATERIALS:

| Component | Type | Material | Colour | Finish | Length (mm) |
|---------------------|-------------|----------|--------|--------|-------------|
| FLORENCE-3R-IP-Z60 | Linear lens | PC | clear | | |
| FLORENCE-3R-IP-SEAL | Seal | Silicone | clear | | |

ORDERING INFORMATION:

| Component | | Qty in box | MOQ | MPQ | Box weight (kg) |
|--------------------------------|-------------|------------|-----|-----|-----------------|
| FS15786_FLORENCE-3R-IP-Z60 | Linear lens | 80 | 80 | 4 | 13.0 |
| » Box size: 356 x 356 x 292 mm | | | | | |




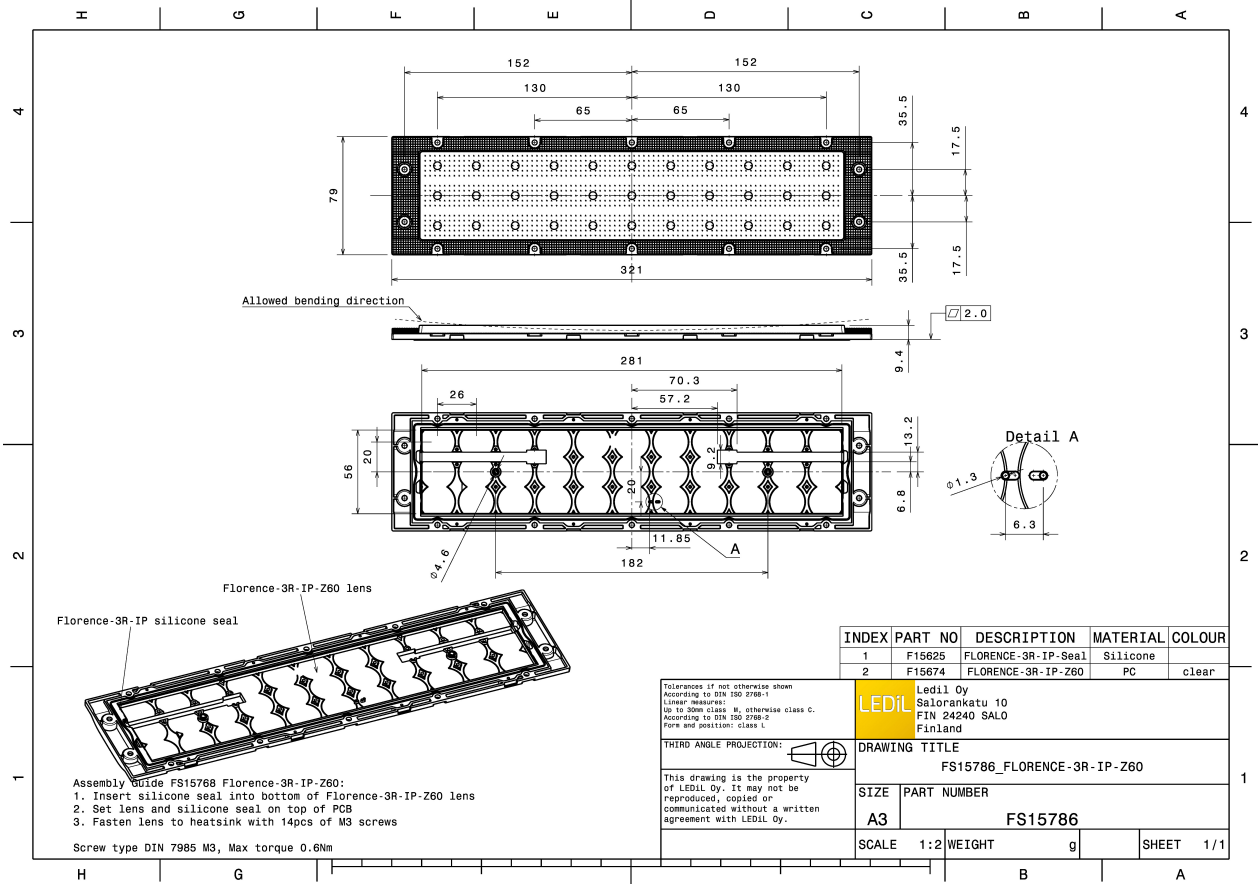


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):

LUMILEDS


LED LUXEON 5050 Round LES
 FWHM / FWTM 62.5 + 60.0° / 108.5 + 116.0°
 Efficiency 87 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

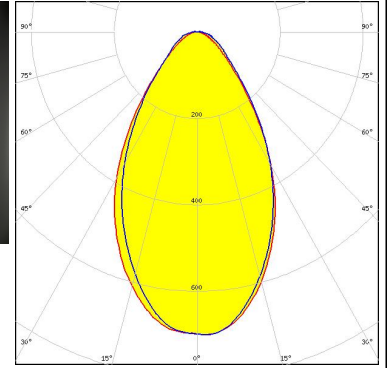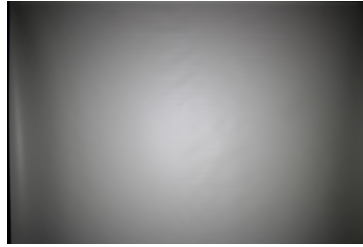

Light distribution files

LUMINUS


LED SST-10-B130
 FWHM / FWTM 61.0° / 104.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type Deep Red
 Required components:

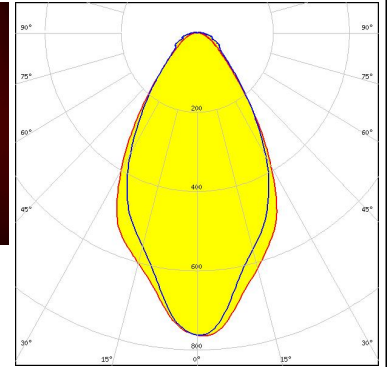

Light distribution files

MST *Your solutions*

LED LinLED 280x55mm 1100lm 840 3x11 33V Opt G2
 FWHM / FWTM 60.0 + 57.0° / 102.5 + 105.0°
 Efficiency 85 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


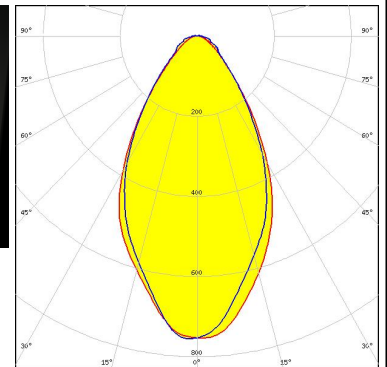


Light distribution files

OPTICAL RESULTS (MEASURED):





LED LinLED 280x55mm 2000lm 830 33V Opt G1
 FWHM / FWTM 60.0 + 57.0° / 102.0 + 105.5°
 Efficiency 85 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

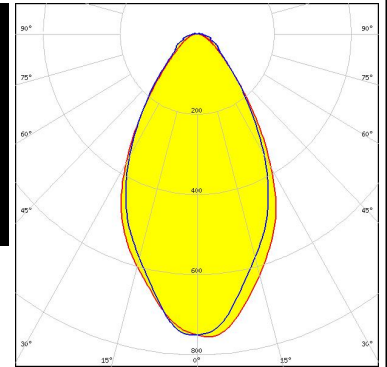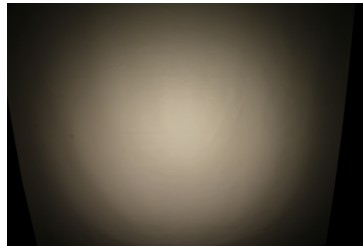

Light distribution files





LED NVSxx19B/NVSxx19C
 FWHM / FWTM 59.0° / 109.0°
 Efficiency 87 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

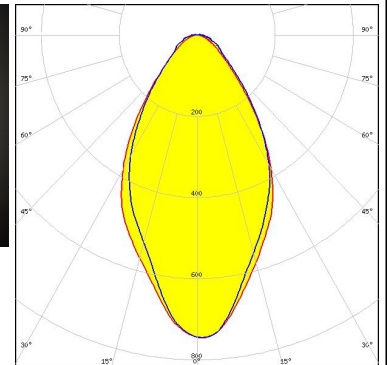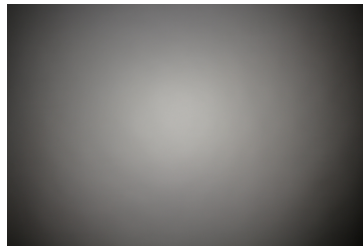

Light distribution files



LED Duris S2
 FWHM / FWTM 58.0° / 117.0°
 Efficiency 82 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

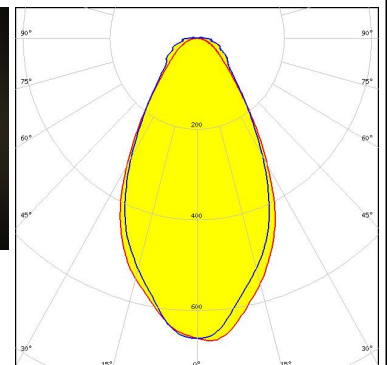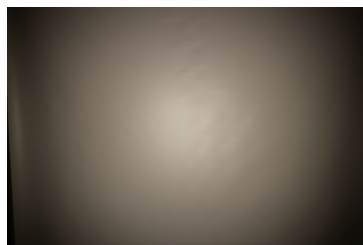


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors


LED Duris S8
 FWHM / FWTM 62.0° / 113.0°
 Efficiency 86 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

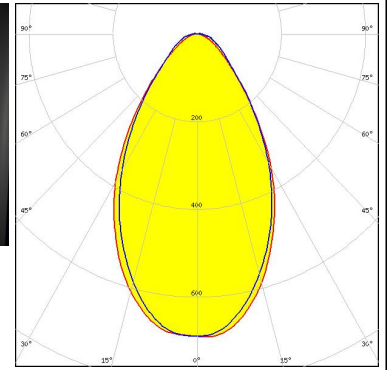

Light distribution files

OSRAM
Opto Semiconductors



LED OSLOM Square CSSRM2/CSSRM3
 FWHM / FWTM 59.0° / 105.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

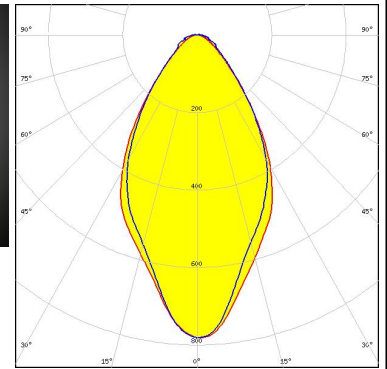

Light distribution files


SEOL
SEOUL SEMICONDUCTOR

LED SEOUL 5630C
 FWHM / FWTM 59.0° / 103.0°
 Efficiency 87 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

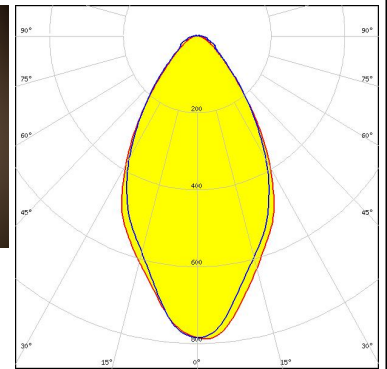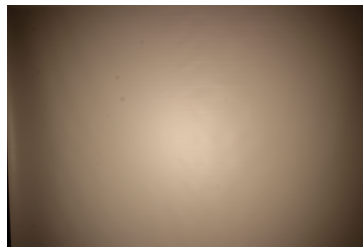


Light distribution files


OPTICAL RESULTS (MEASURED):




SEOL SEMICONDUCTOR

LED: SEOUL DC 3030
 FWHM / FWTM: 60.0 + 57.0° / 101.0 + 104.0°
 Efficiency: 88 %
 Peak intensity: 0.8 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:

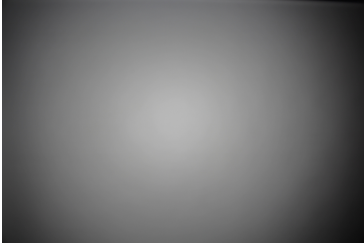

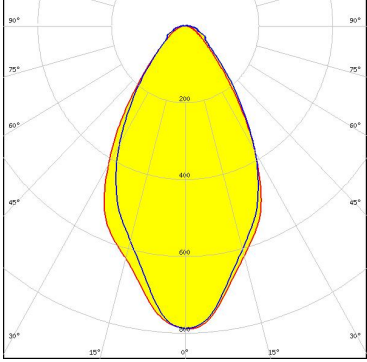
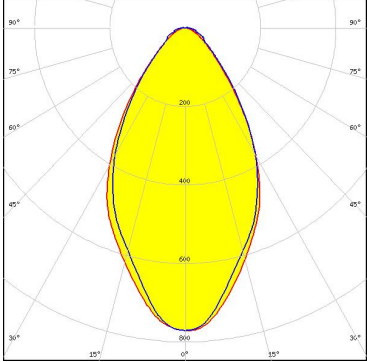


Light distribution files



LED: LLE G2 55x280mm 2000lm
 FWHM / FWTM: 59.0° / 105.0°
 Efficiency: 88 %
 Peak intensity: 0.8 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:






Light distribution files

OPTICAL RESULTS (SIMULATED):




LED Bridgelux SMD 5050
FWHM / FWTM 79.0° / 123.0°
Efficiency 83 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

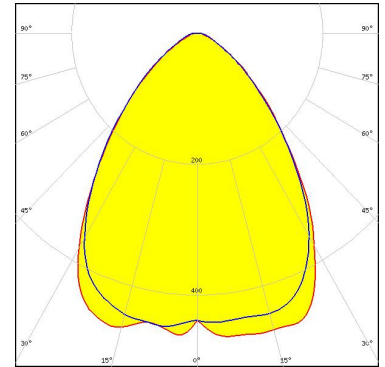

Light distribution files




LED XP-G2
FWHM / FWTM 60.0° / 102.0°
Efficiency 92 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

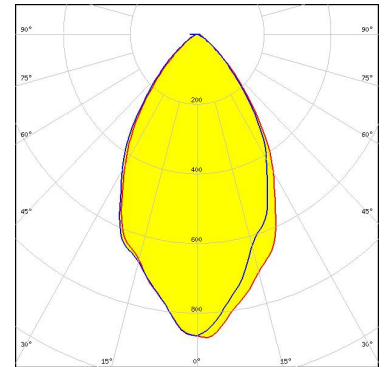

Light distribution files



LED XP-G3
FWHM / FWTM 59.0° / 102.0°
Efficiency 92 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

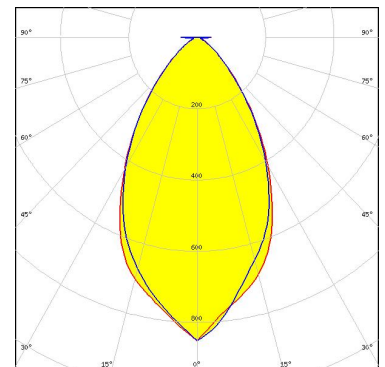


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED Duris E 2835
FWHM / FWTM 74.0° / 116.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

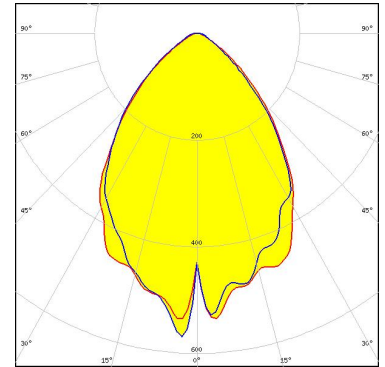

Light distribution files

OSRAM
Opto Semiconductors


LED Duris S10
FWHM / FWTM 74.0° / 120.0°
Efficiency 82 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

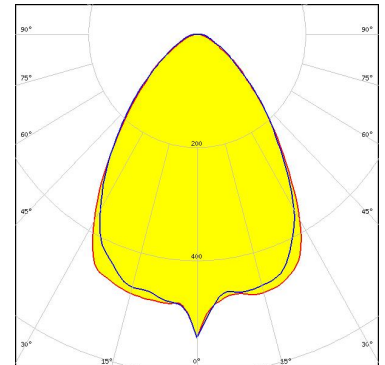

Light distribution files

OSRAM
Opto Semiconductors

LED OSCONIQ P 3030
FWHM / FWTM 64.0° / 96.0°
Efficiency 90 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type Hyper Red
Required components:

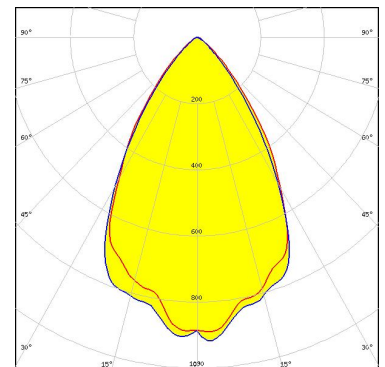


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3737 (2W version)
FWHM / FWTM 78.0° / 120.0°
Efficiency 84 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

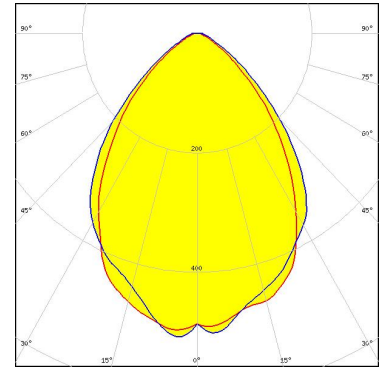

Light distribution files

SAMSUNG


LED LH502D
FWHM / FWTM 70.0° / 104.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

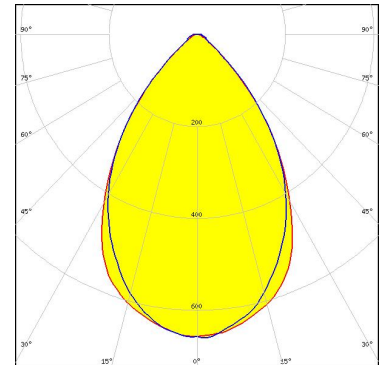

Light distribution files

SAMSUNG

LED LM302Z
FWHM / FWTM 70.0 + 69.0° / 105.0°
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour/type White
Required components:

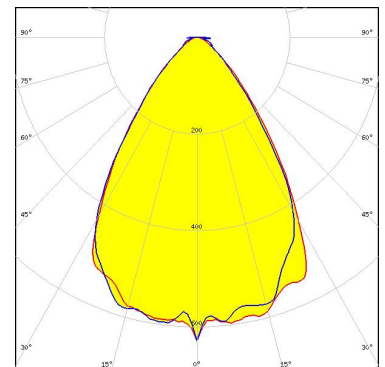


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LM302Z
FWHM / FWTM 68.0 + 64.0° / 104.0 + 94.0°
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:

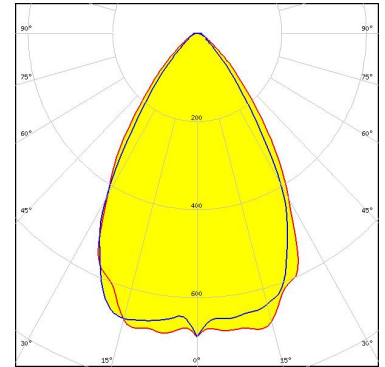

Light distribution files




LED Z8Y22
FWHM / FWTM 62.0° / 100.0°
Efficiency 93 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

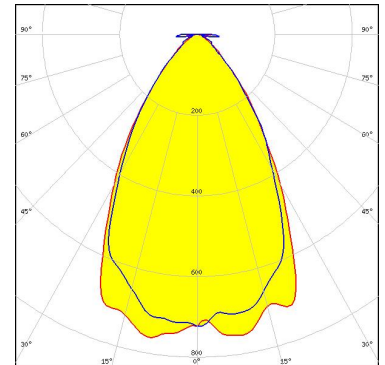

Light distribution files



LED Z8Y22P
FWHM / FWTM 63.0° / 101.0°
Efficiency 93 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

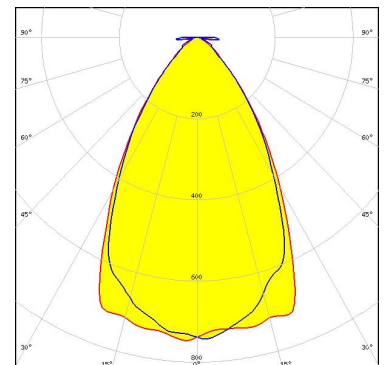

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)