




Right view
Scale: 1:1

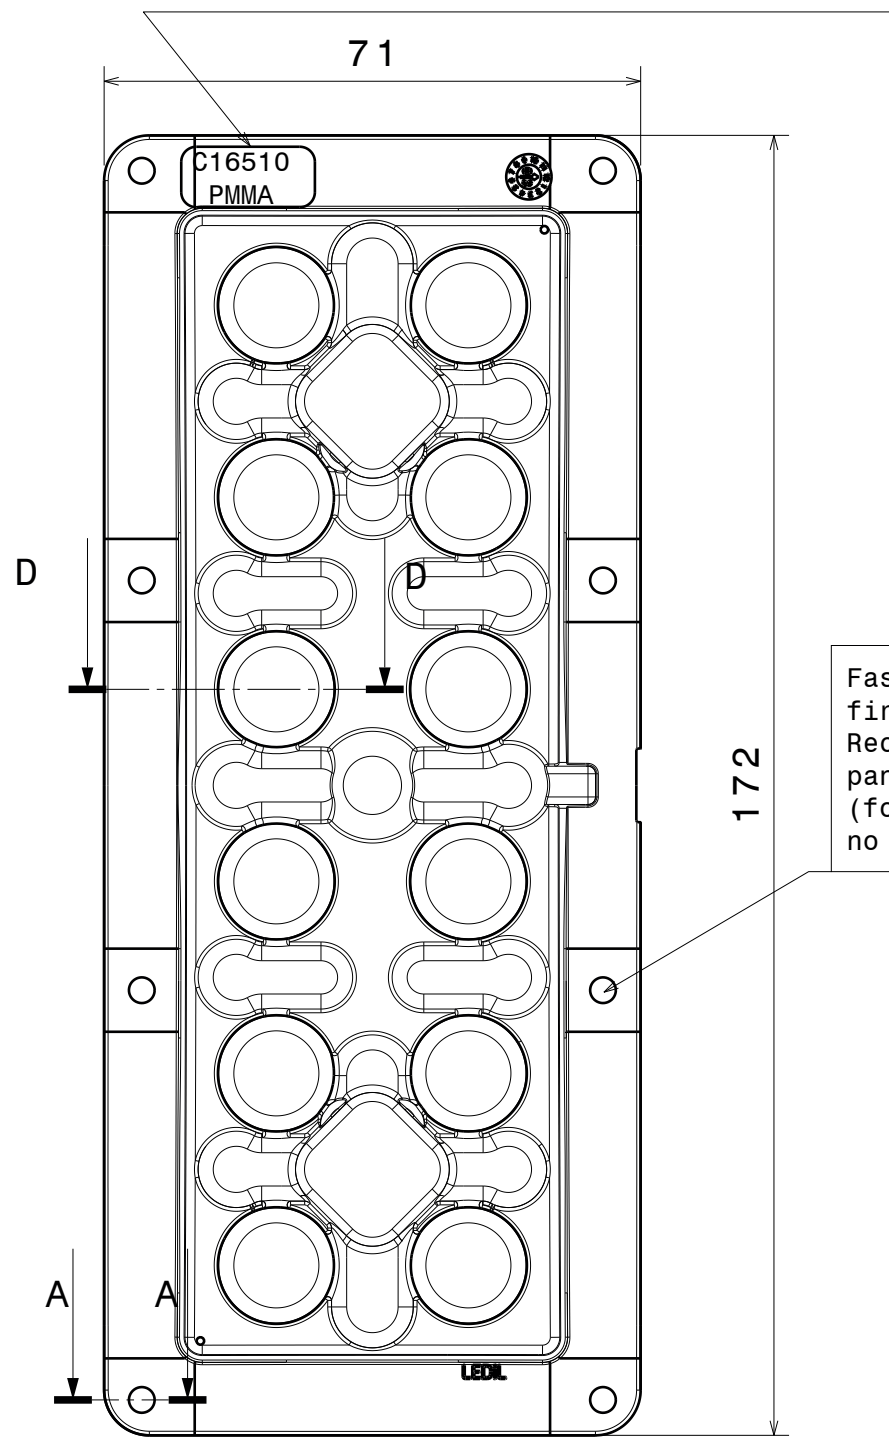


Front view
Scale: 1:1

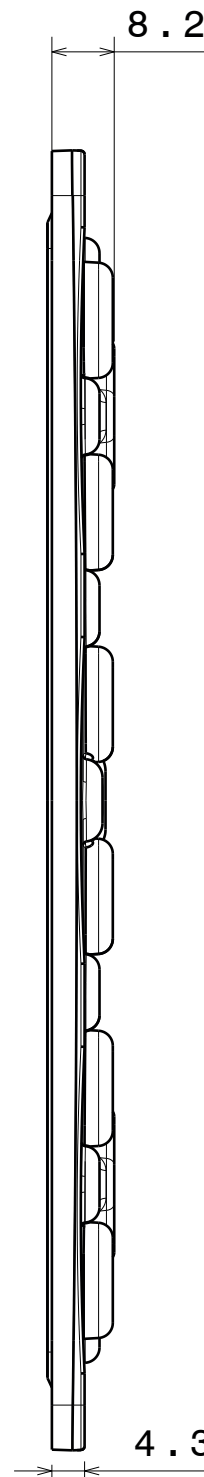

Left view
Scale: 1:1

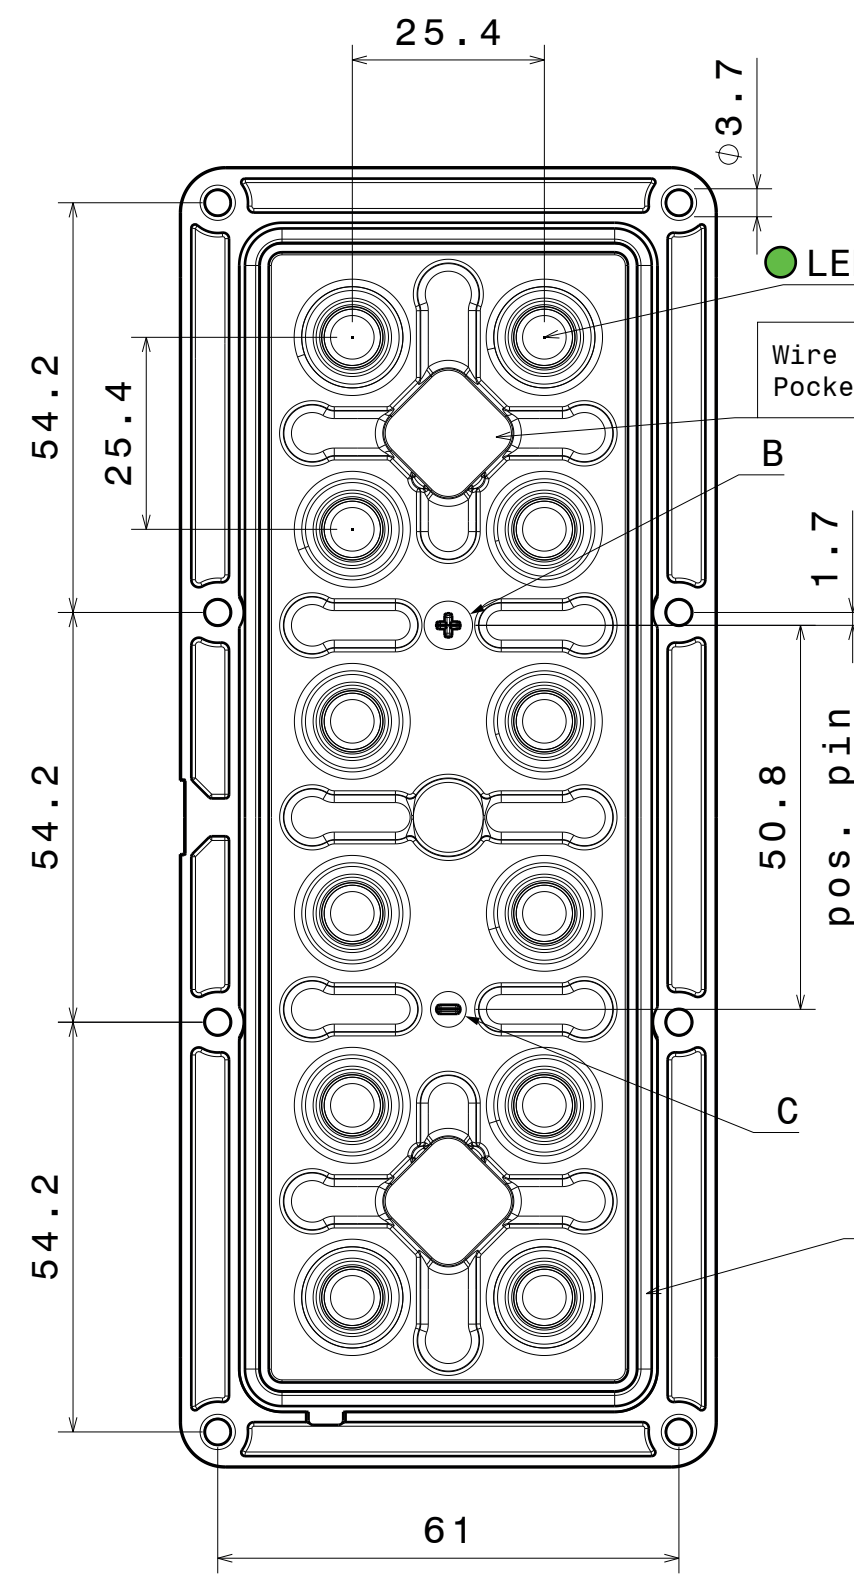


Rear view
Scale: 1:1

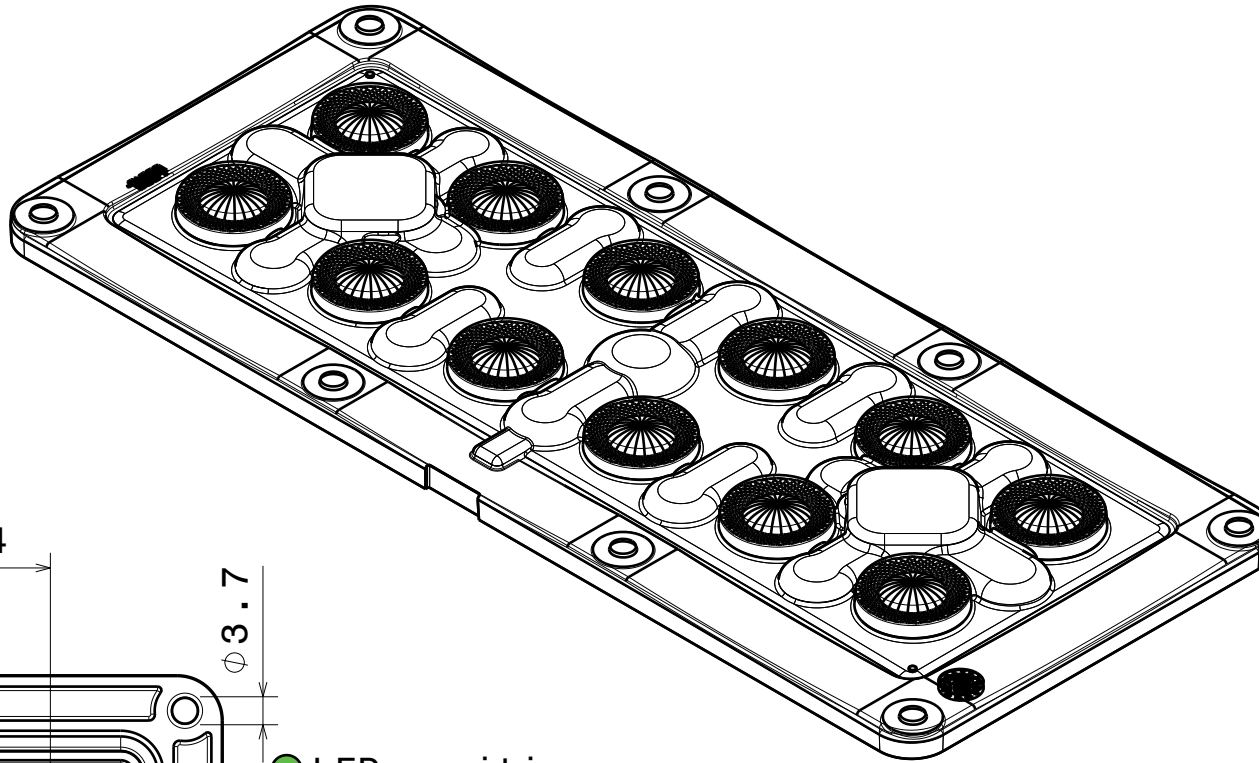


Isometric view
Scale: 1:1


Silicone seal is tested to work in LEDiL test assemblies. Customer is recommended to test the sealing in the end product due many variables, such as heat sink surface and possible chemical traces

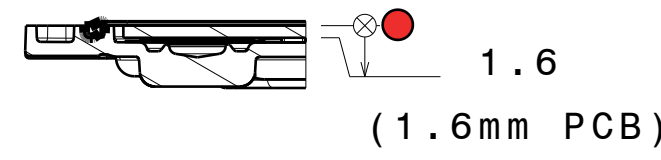


Section view D-D
Scale: 1:1

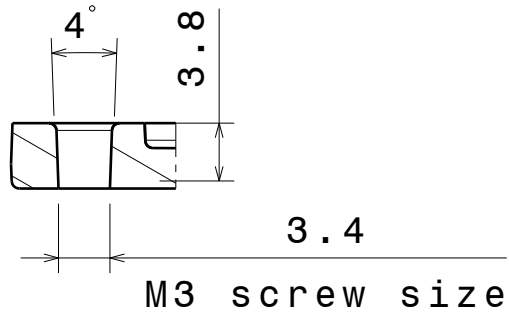


Section view A-A
Scale: 2:1



Detail C
Scale: 2:1



Detail B
Scale: 2:1

PART	TYPE	MATERIAL	COLOR / COATING
CS16511_HB-IP-2X6-G2-W	HB-IP-2X6-W	PMMA 8N, Silicone seal	
MECHANICAL DRAWING			LEDiL®
PRODUCT CS16511_HB-IP-2X6-G2-W			
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 		This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.
SCALE 1:1	WEIGHT 35 g		
			A2 SHEET 1/1

Notes

1	PCB or heatsink level.
2	LED location.
3	Ensure LED fitting from a product specific 3D model available from www.ledil.com .
4	See installation details in page 2.