

MINNIE-M

~25° medium beam optimized for CREE MT-G. Assembly with holder and installation tape.

SPECIFICATION:

Dimensions	Ø 35.0
Height	15.8 mm
Fastening	tape
ROHS compliant	yes 🛈



MATERIALS:


Component	Туре	Material	Colour	Finish	Length (mm)
MINNIE-M	Reflector	PC	metal		
MINNIE-HLD-2	Holder	PC	black		
SPUTNIK-TAPE	Таре	Acrylic foam	black		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA12239_MINNIE-M	840	120	60	6.1
» Box size:				



PRODUCT DATASHEET CA12239_MINNIE-M

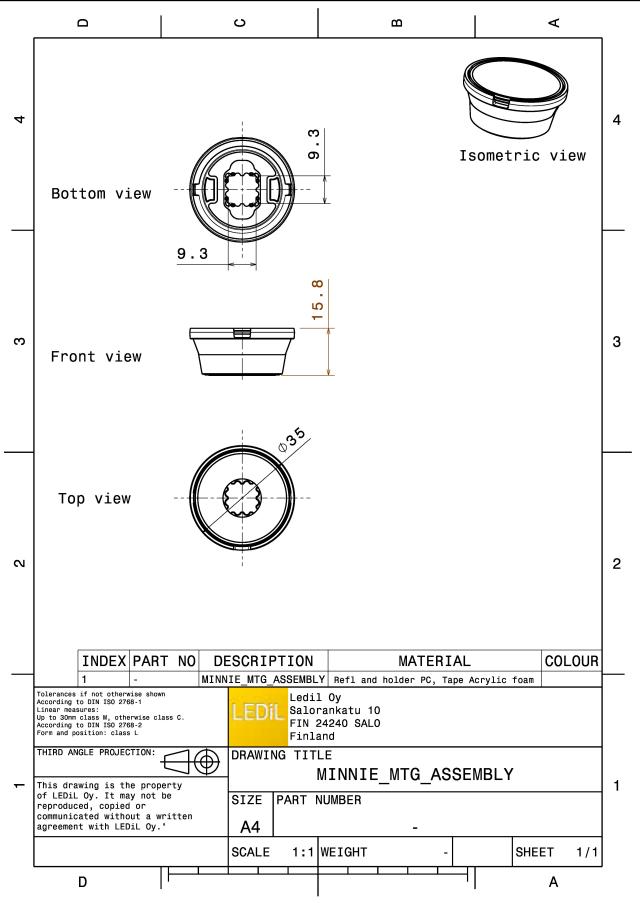

See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):

			ke her
LED	MT-G		7587
FWHM / FWTM	26.0° / 84.0°		
Efficiency	%		6087 608
LEDs/each optic	1		
Light colour/type	White		azis
Required compone	ents:		100 100 100 100 100
		Light distribution files	
CREE \$ LEDS		Light distribution files	20 ⁴ 22
	MT-62	Light distribution files	29°
LED	MT-G2 22 0° / 71 0°	Light distribution files	25
LED FWHM / FWTM	22.0° / 71.0°	Light distribution files	
LED FWHM / FWTM Efficiency	22.0° / 71.0° 88 %	Light distribution files	90 90 90 90 90 90 90 90 90 90 90 90 90 9
LED FWHM / FWTM Efficiency Peak intensity	22.0° / 71.0°	Light distribution files	
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic	22.0° / 71.0° 88 % 2.6 cd/lm	Light distribution files	90
LED FWHM / FWTM Efficiency Peak intensity	22.0° / 71.0° 88 % 2.6 cd/lm 1 White	Light distribution files	



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7 FI-24240 SALO Finland

LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Poznan, Poland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy

Last update: 13/05/2024 Subject to change without prior notice LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.