

## STELLA-DWC2

Universal road lighting (IESNA Type II Medium) beam with excellent mixed illuminance and luminance uniformity. Compatible with up to 23 mm LES size COBs. Variant with black frame..



### SPECIFICATION:


|                            |         |
|----------------------------|---------|
| Dimensions                 | Ø 90.0  |
| Height                     | 19.3 mm |
| Fastening                  | screw   |
| Ingress protection classes | IP67    |
| ROHS compliant             | yes ⓘ   |

### MATERIALS:

| Component    | Type        | Material | Colour | Finish | Length (mm) |
|--------------|-------------|----------|--------|--------|-------------|
| STELLA-DWC2  | Single lens | Silicone | clear  |        |             |
| STELLA-FRAME | Holder      | PA66     | black  |        |             |

### ORDERING INFORMATION:

| Component                      |             | Qty in box | MOQ | MPQ | Box weight (kg) |
|--------------------------------|-------------|------------|-----|-----|-----------------|
| FN14976_STELLA-DWC2            | Single lens | 135        | 135 | 15  | 7.1             |
| » Box size: 480 x 280 x 300 mm |             |            |     |     |                 |

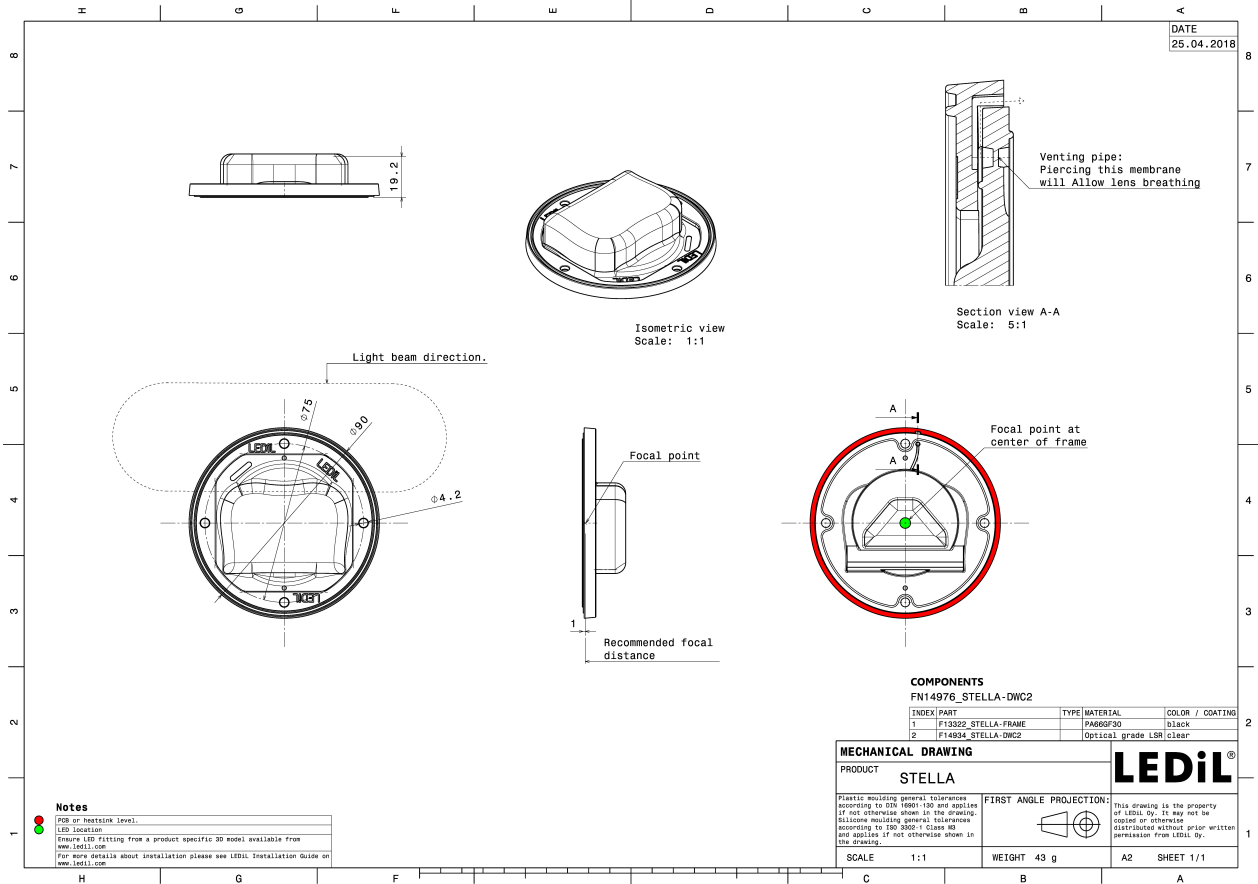


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

### OPTICAL RESULTS (MEASURED):

bridgelux


LED V18 Gen7  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
Bender Wirth: 439 Typ L3

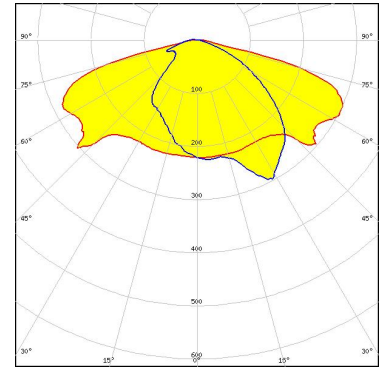

Light distribution files

bridgelux


LED V18 Gen7  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

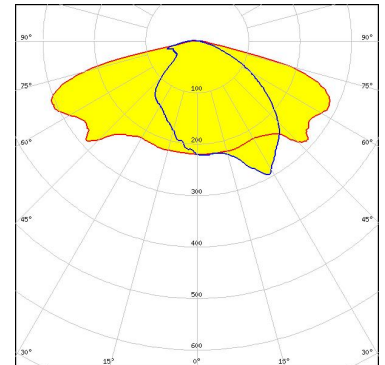

Light distribution files

bridgelux

LED V22 Gen7  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

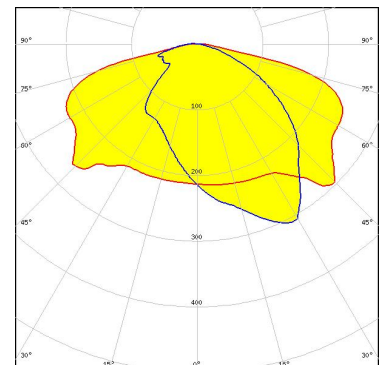


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED V22 Gen7  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
TE Connectivity: 2213480-1

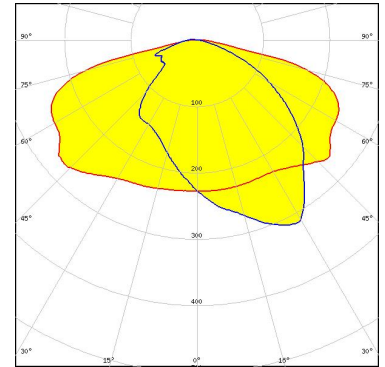

Light distribution files




LED Vero SE 13  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

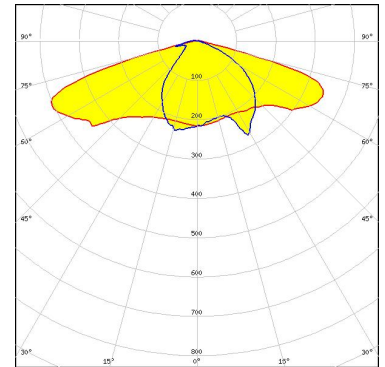

Light distribution files



LED Vero SE 18  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

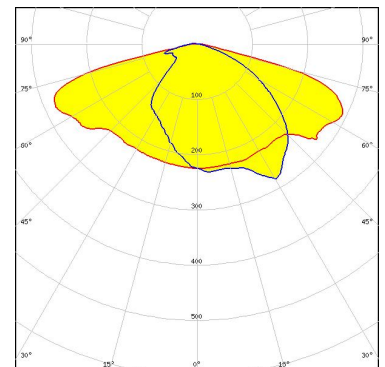


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED VERO13  
 FWHM / FWTM Asymmetric  
 Efficiency 89 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

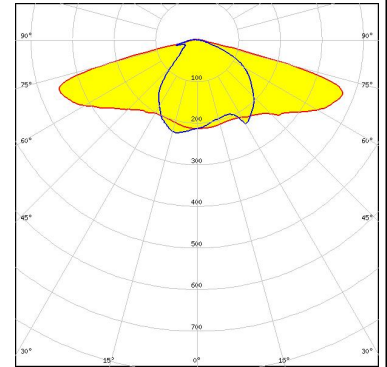

Light distribution files




LED VERO18  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

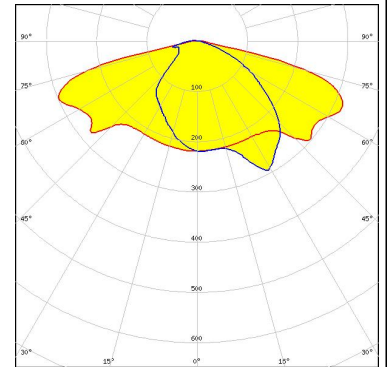

Light distribution files



LED CMA2550  
 FWHM / FWTM Asymmetric  
 Efficiency 89 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

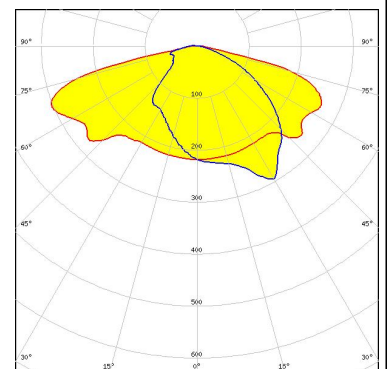


Light distribution files

### OPTICAL RESULTS (MEASURED):




LED CMA3090  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

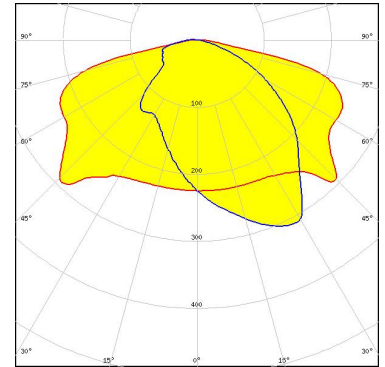

Light distribution files




LED CXA/B 1816 & CXA/B 1820 & CXA 1850  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

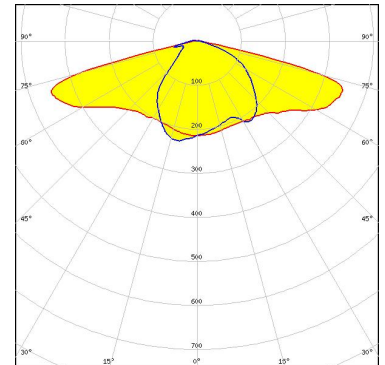

Light distribution files



LED CXA/B 25xx  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

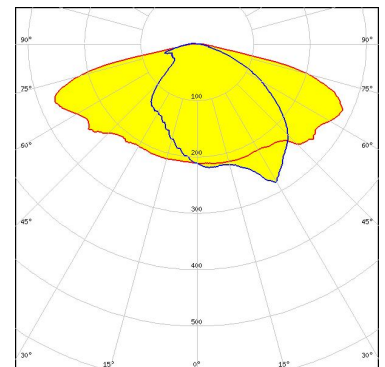


Light distribution files

### OPTICAL RESULTS (MEASURED):




LED CXA/B 25xx  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
Bender Wirth: 439 Typ L3

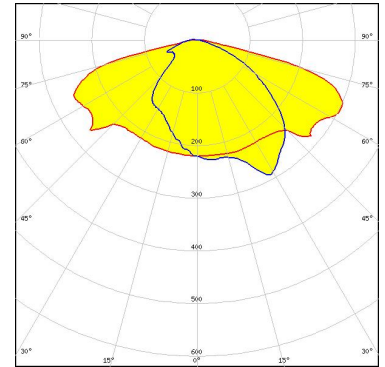

Light distribution files




LED COB J-Type  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

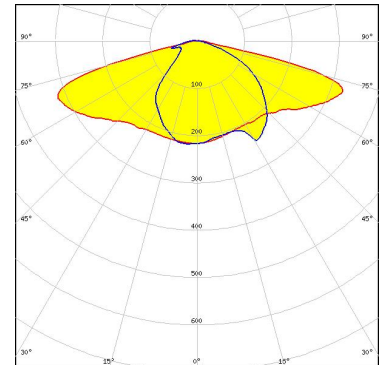

Light distribution files



LED Soleriq S19  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


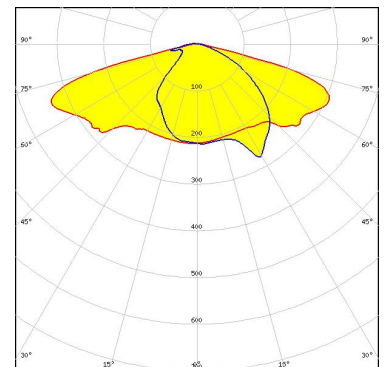


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED LC016D / LC019D / LC026D / LC033D  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

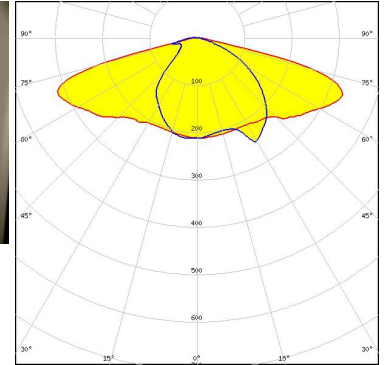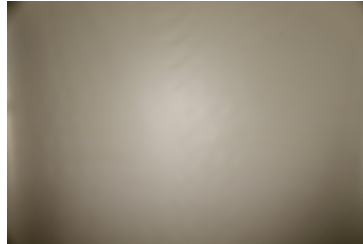

Light distribution files

### SAMSUNG


LED LC040D / LC060D / LC080D  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

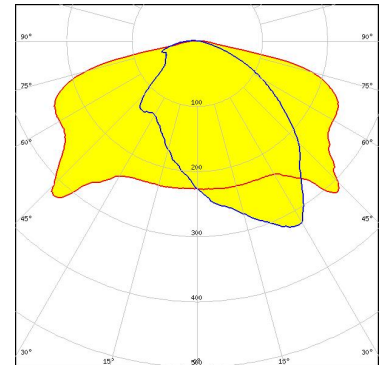

Light distribution files

### SAMSUNG

LED LC040D / LC060D / LC080D  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

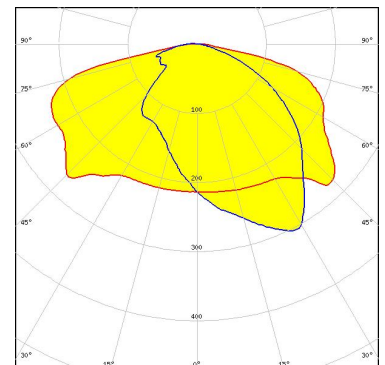


Light distribution files



#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED LC040D / LC060D / LC080D  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

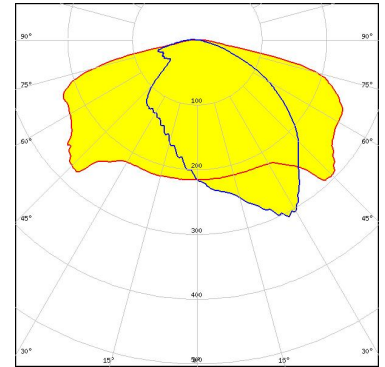

Light distribution files




LED MJT COB LES 14.5  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
Bender Wirth: 433 Typ Z1

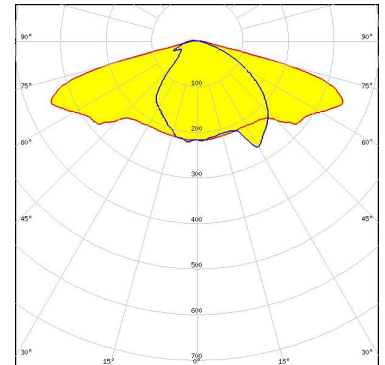

Light distribution files




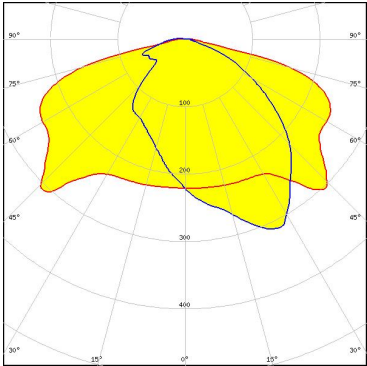
LED MJT COB LES 14.5  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

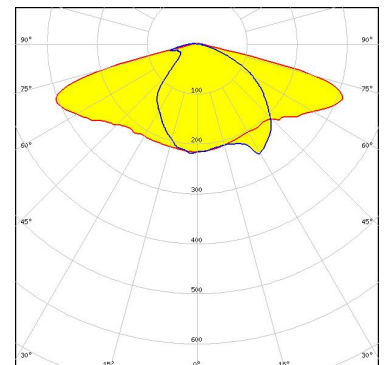

Light distribution files

#### OPTICAL RESULTS (MEASURED):

|   |                |
|---|----------------|
| <br>SEUL SEMICONDUCTOR |                |
| LED   | MJT COB LES 22 |
| FWHM / FWTM   | Asymmetric     |
| Efficiency  | 90 %           |
| Peak intensity  | 0.4 cd/lm      |
| LEDs/each optic   | 1              |
| Light colour/type   | White          |
| Required components:  |                |
| Bender Wirth: 431 Typ Z1  |                |




Light distribution files

#### OPTICAL RESULTS (SIMULATED):



**LED** V10 Gen7  
**FWHM / FWTM** Asymmetric  
**Efficiency** 89 %  
**Peak intensity** 0.5 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

Bender Wirth: 486 Typ L1

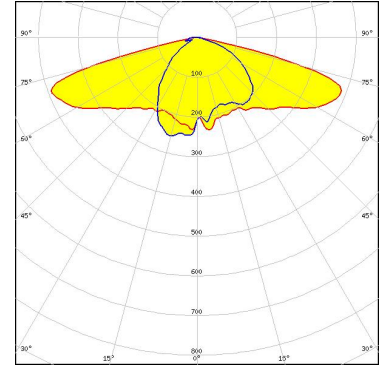


Light distribution files



**LED** V13 Gen7  
**FWHM / FWTM** Asymmetric  
**Efficiency** 93 %  
**Peak intensity** 40.5 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**


Bender Wirth: 477 Typ Z1

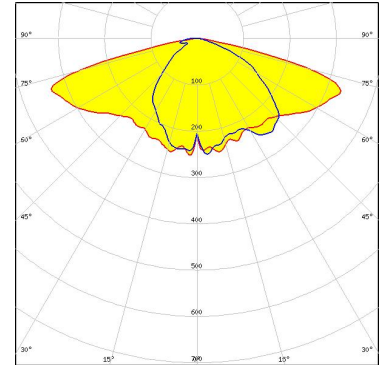

Light distribution files





**LED** V13 Gen7  
**FWHM / FWTM** Asymmetric  
**Efficiency** 91 %  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

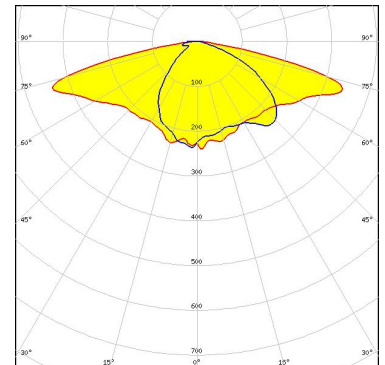

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

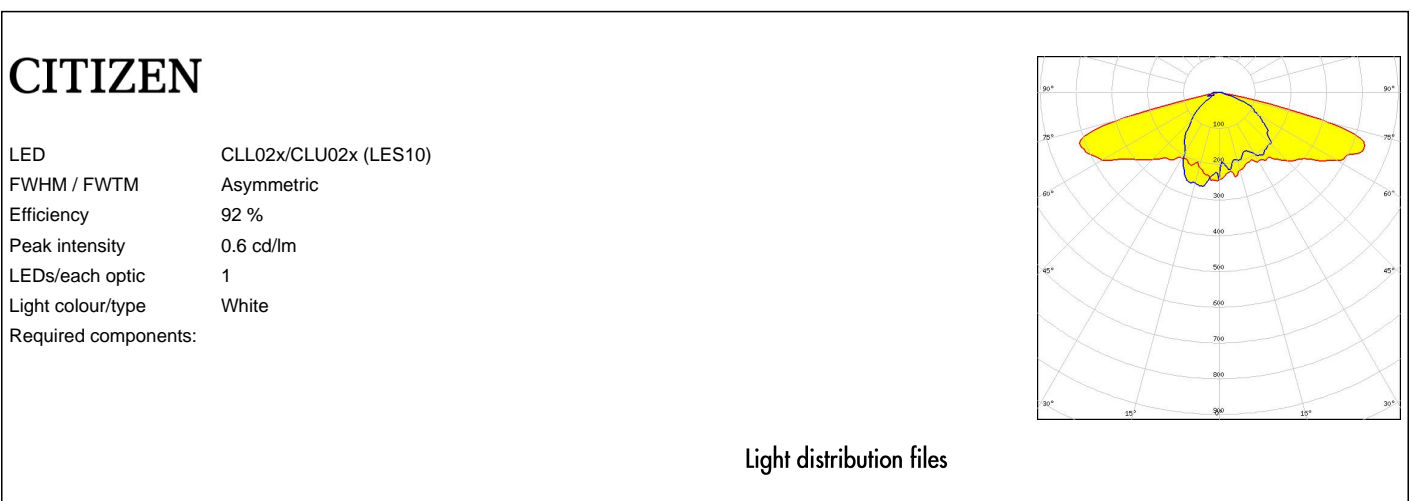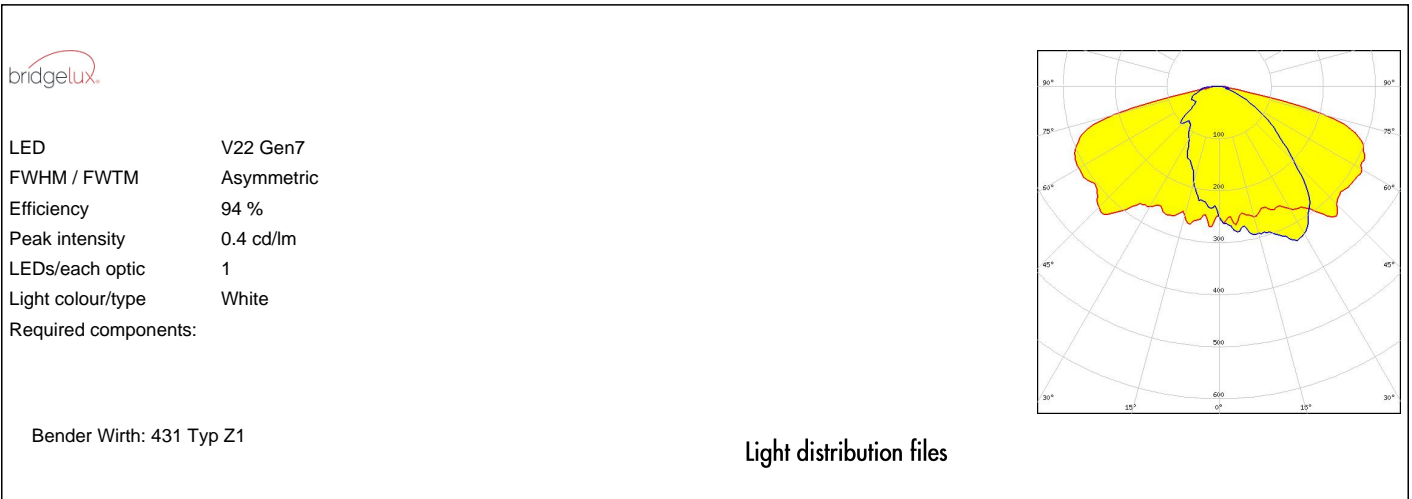

#### OPTICAL RESULTS (SIMULATED):

### CITIZEN


LED CLL03x/CLU03x  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

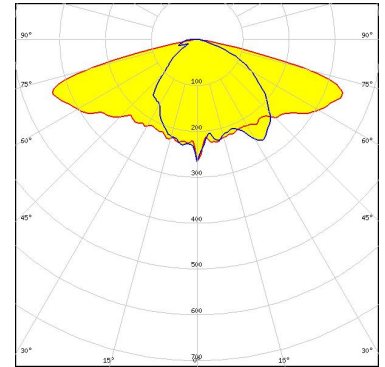

Light distribution files

### CITIZEN

LED CLL04x/CLU04x  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

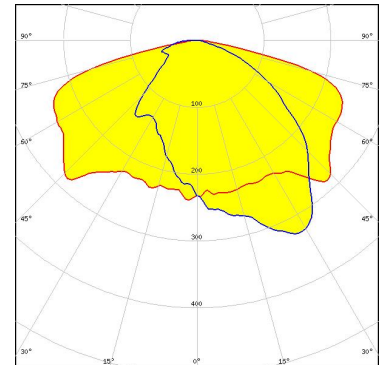


Bender Wirth: 431 Typ Z1

Light distribution files



LED CMU22xx  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

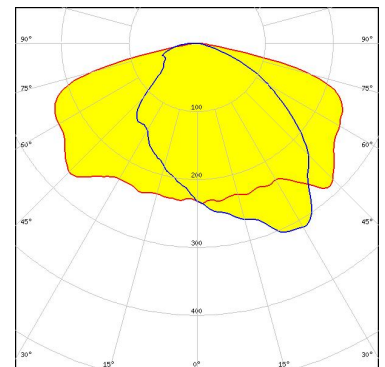


Bender Wirth: 431 Typ Z1

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED CXA/B 1830  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

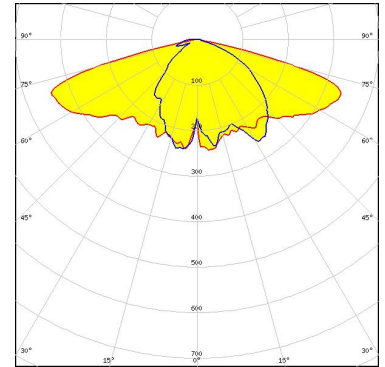

Light distribution files




LED CXA/B 25xx  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

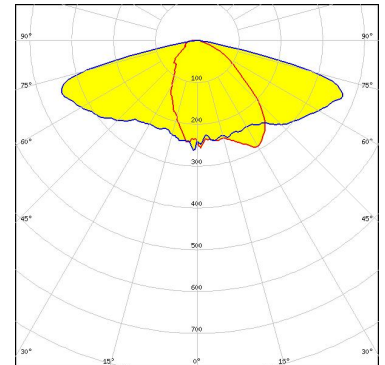

Light distribution files



LED LUXEON CoB 1208  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

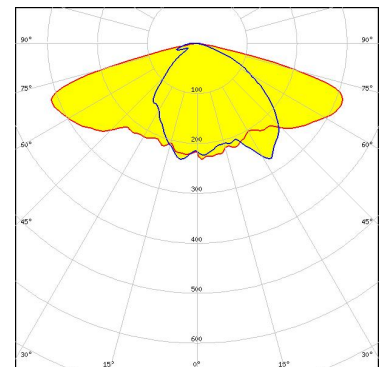

Bender Wirth: 431 Typ Z1


Light distribution files

### OPTICAL RESULTS (SIMULATED):

**LUMILEDS**

LED: LUXEON CoB 1211  
 FWHM / FWTM: Asymmetric  
 Efficiency: 89 %  
 Peak intensity: 0.4 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

Bender Wirth: 431 Typ Z1

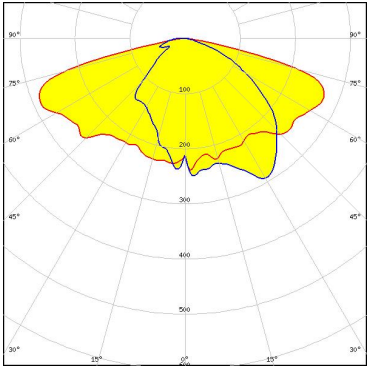


Light distribution files

**LUMILEDS**

LED: LUXEON CoB 1213/1216/1812  
 FWHM / FWTM: Asymmetric  
 Efficiency: 88 %  
 Peak intensity: 0.3 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

Bender Wirth: 431 Typ Z1

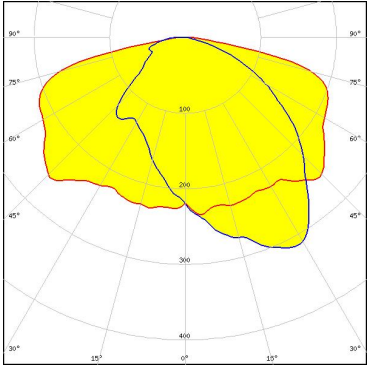


Light distribution files

**LUMINUS**

LED: CxM-22 (28x28)  
 FWHM / FWTM: Asymmetric  
 Efficiency: 91 %  
 Peak intensity: 0.4 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

Bender Wirth: 431 Typ Z1

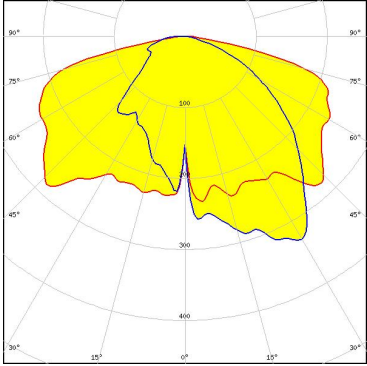


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED Soleriq S13  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Bender Wirth: 477 Typ Z1

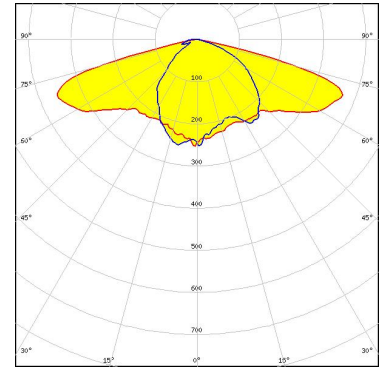


Light distribution files

**PHILIPS**

LED Fortimo SLM L19 CoB  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Bender Wirth: 631b LowProfile

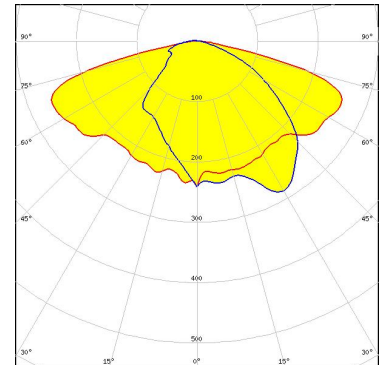

Light distribution files

**PHILIPS**

LED Fortimo SLM L23 + SLM holder (PI)  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

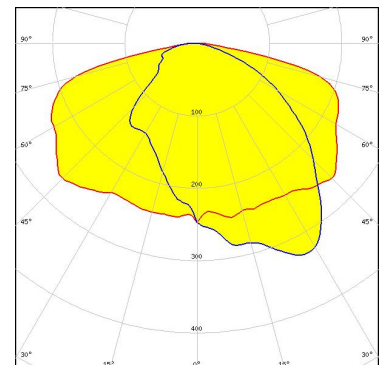

Light distribution files



### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 7  
FI-24100 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)