PRODUCT DATASHEET CS14145_STRADA-IP-2X6-DWC-90

STRADA-IP-2X6-DWC-90

Universal road lighting (typically IESNA Type III medium) beam with excellent mixed illuminance and luminance uniformity. Variant with beam direction rotated 90°.

SPECIFICATION:

Dimensions 71.4 x 173.0

Height 9 mm

Fastening screw

Ingress protection classes IP67

ROHS compliant yes 1



MATERIALS:

ComponentTypeMaterialColourFinishLength (mm)STRADA-IP-2X6-DWC-90Multi-lensPMMAclear2X6-SEAL25SealSiliconewhite


ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CS14145_STRADA-IP-2X6-DWC-90	Multi-lens	120	40	40	7.3
» Box size: 476 x 273 x 247 mm					



PRODUCT



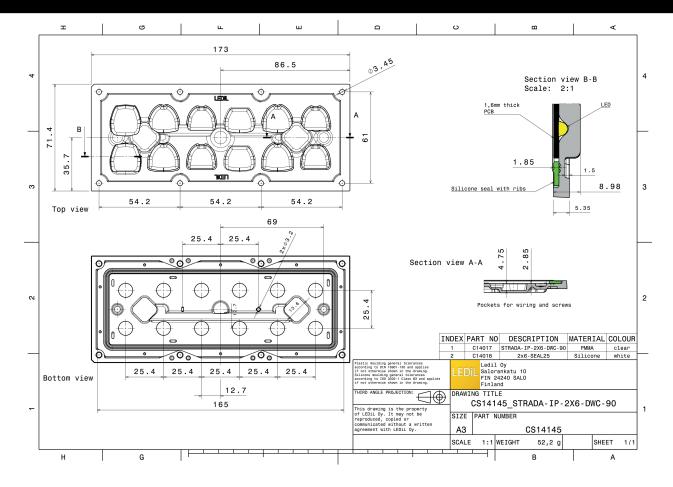


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):

CREE \$


LED XP-G2
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

CREE \$

LED XT-E
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

MILEDS

LED LUXEON Rebel ES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

CS14145_STRADA-IP-2X6-DWC-90

OPTICAL RESULTS (MEASURED):

DESCRIPTION


LED LUXEON T
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files




LED LUXEON TX
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files



LED NVSW3x9A
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

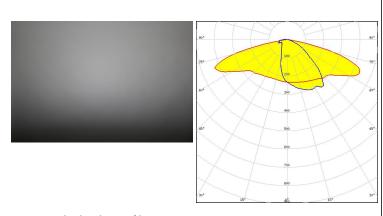

Light distribution files

CS14145_STRADA-IP-2X6-DWC-90

OPTICAL RESULTS (MEASURED):

WNICHIA

LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:




Light distribution files



LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1


Light colour/type White Required components:



Light distribution files

OSRAM Opto Semiconductors

LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

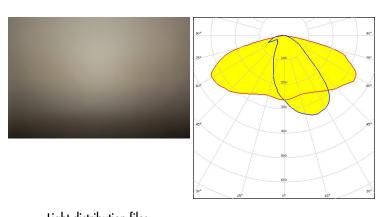

Light distribution files

PRODUCT DATASHEET CS14145_STRADA-IP-2X6-DWC-90


OPTICAL RESULTS (MEASURED):

OSRAM Opto Semino

OSLON Square EC FWHM / FWTM Asymmetric

Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic

Light colour/type White Required components:

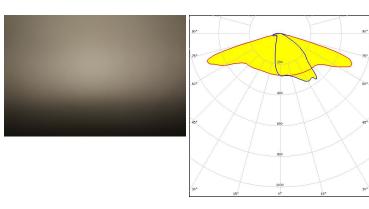


Light distribution files

OSRAM Opto Semiconductore

OSLON Square PC

FWHM / FWTM Asymmetric Efficiency Peak intensity 0.6 cd/lm

LEDs/each optic Light colour/type White Required components:




Light distribution files

SAMSUNG

LED LH351Z FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic 1

Light colour/type White Required components:



Light distribution files


LEDiL®

OPTICAL RESULTS (MEASURED):



LED SMJQ-D36W12Mx
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White

Light colour/type Whi Required components:




Light distribution files



LED Z5M3
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1

Light colour/type White Required components:




Light distribution files



LED Z8Y22
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

20 20 40



Light distribution files




OPTICAL RESULTS (MEASURED):



LED Z8Y22P
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files

TOSHIBA

Leading Innovation >>>

LED TL1L4
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1

Light colour/type White Required components:




Light distribution files

OPTICAL RESULTS (SIMULATED):



XP-G2 HE LED Asymmetric FWHM / FWTM Efficiency 92 % Peak intensity 0.4 cd/lm LEDs/each optic 1 Light colour/type White

Required components:




Light distribution files



XP-G3 LFD FWHM / FWTM Asymmetric Efficiency 88 % Peak intensity 0.4 cd/lm LEDs/each optic Light colour/type White

Required components:




Light distribution files

inventronics

PrevaLED Brick HP IP 2x6

FWHM / FWTM Asymmetric 93 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic Light colour/type White Required components:

Light distribution files



CS14145_STRADA-IP-2X6-DWC-90


OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files



LED LUXEON V2
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files



LED NV4WB35AM
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files

CS14145_STRADA-IP-2X6-DWC-90


OPTICAL RESULTS (SIMULATED):

OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files


OSRAM Opto Semiconductore

Opto Semiconduct

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files

SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files

SAMSUNG

LED LM301D
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files



LED 2x6 5050 module - SMJD-3625012F-XX

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

OPTICAL RESULTS (SIMULATED):



LED Z5M1/Z5M2
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files



LED Z5M4
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White


Required components:



Light distribution files

TOSHIBA Leading Innovation >>>

LED TL1L2
FWHM / FWTM Asymmetric
Efficiency 88 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

CS14145_STRADA-IP-2X6-DWC-90

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 7 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B **Casic Motor Building** Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy