

## STRADA-2X2-VSM

IESNA Type V (square) beam for wide areas lighting such as car parks

### SPECIFICATION:

Dimensions	50.0 x 50.0
Height	6.1 mm
Fastening	glue, pin, screw
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADA-2X2-VSM	Multi-lens	PMMA	clear		

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C14680_STRADA-2X2-VSM » Box size: 480 x 280 x 300 mm	800	160	160	6.2

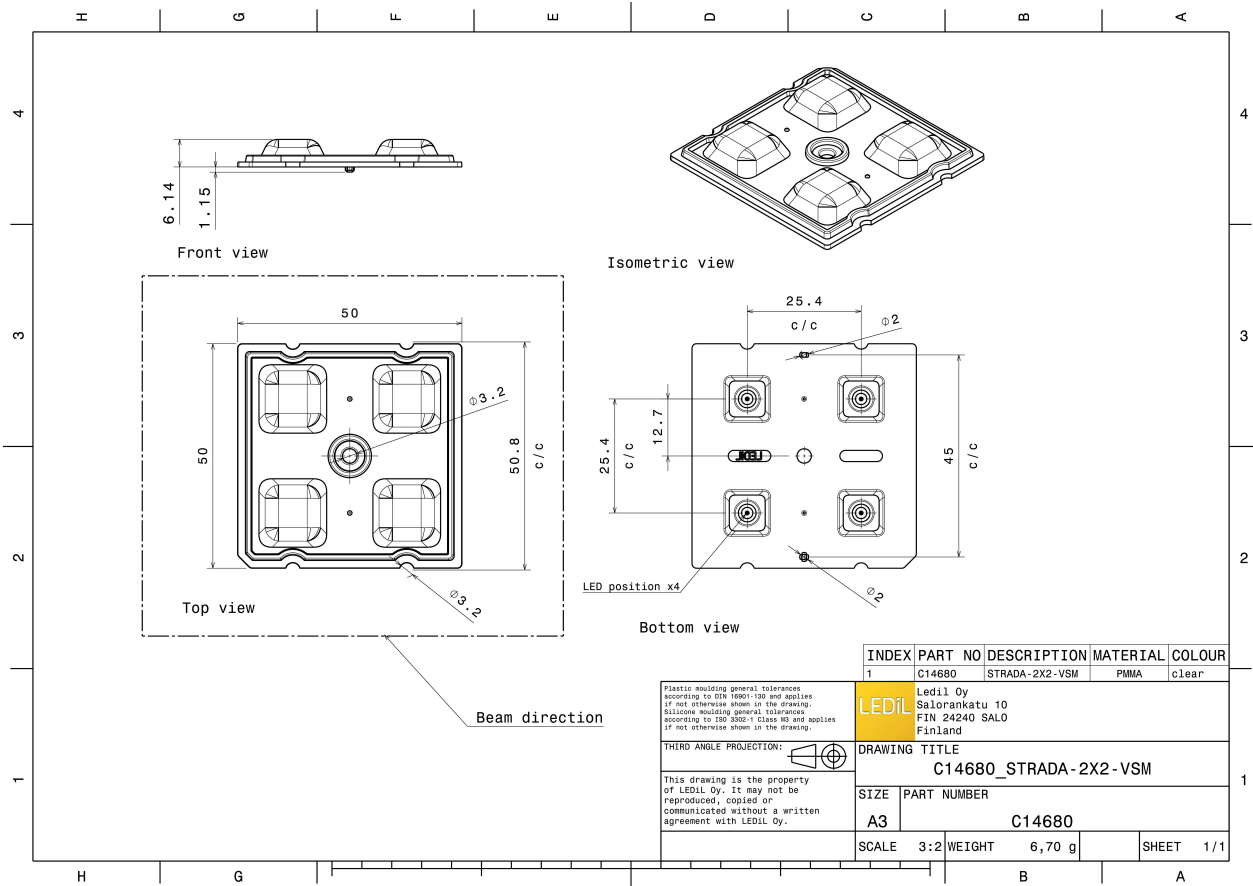


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):




**LED** Bridgelux SMD 5050  
**FWHM / FWTM** 149.0° / 158.0°  
**Efficiency** 94 %  
**Peak intensity** 0.3 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

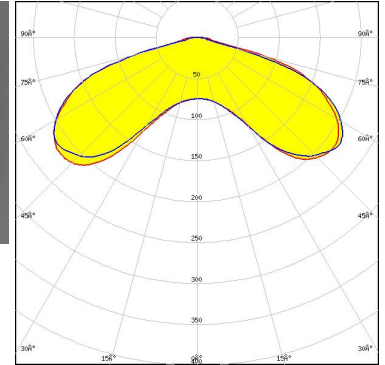

Light distribution files




**LED** QUICK FLUX XTP 2x4 xxx LS G5  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.5 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

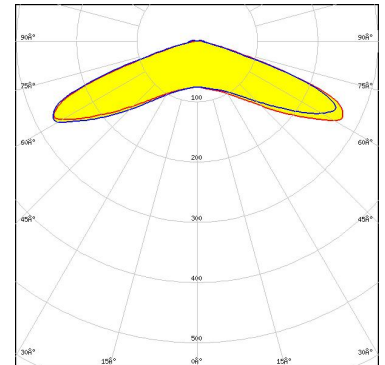

Light distribution files



**LED** QUICK FLUX XTP 2x6 xxx LS G5  
**FWHM / FWTM** Asymmetric  
**Efficiency** 94 %  
**Peak intensity** 0.5 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

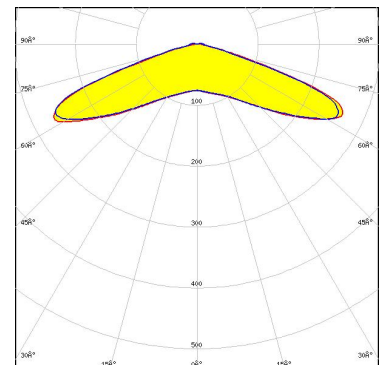


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED QUICK FLUX XTP 2x8 xxx LS G5  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

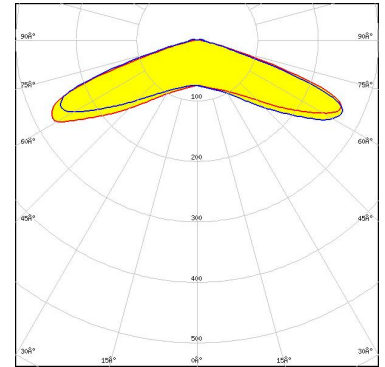

Light distribution files





LED J Series 5050C 6V E Class  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

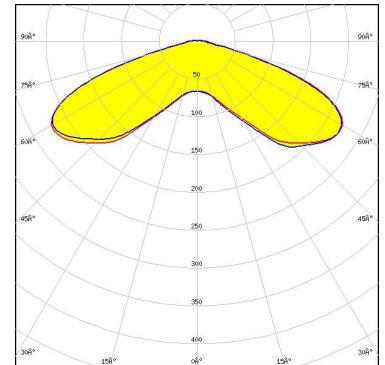

Light distribution files



LED XD16  
FWHM / FWTM 149.0° / 159.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

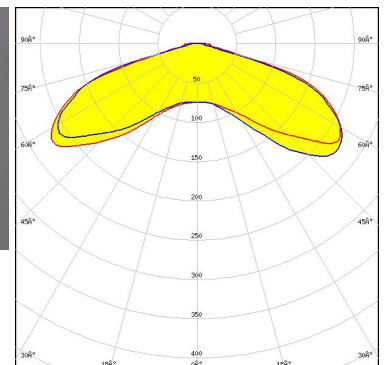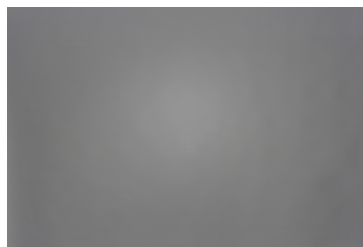


Light distribution files



#### OPTICAL RESULTS (MEASURED):




LED XD16  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

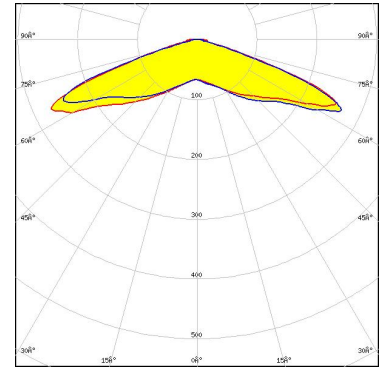

Light distribution files




LED XHP35 HD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

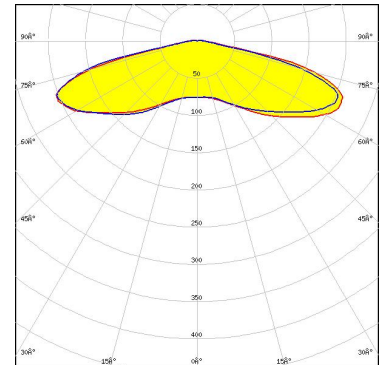

Light distribution files



LED XP-G2  
 FWHM / FWTM 151.0° / 161.0°  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

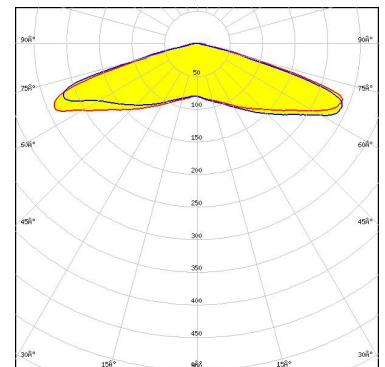

Light distribution files

### OPTICAL RESULTS (MEASURED):





LED XP-G2 HE  
FWHM / FWTM 152.0° / 160.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files




LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

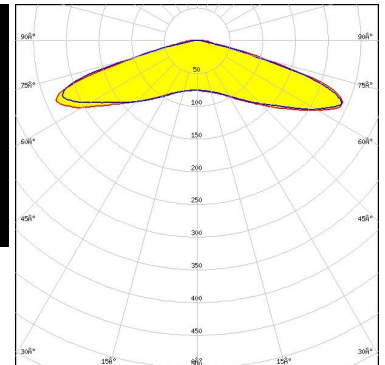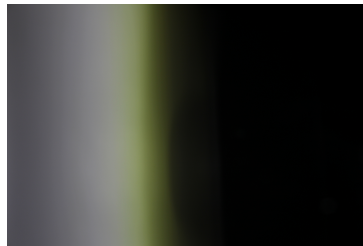

Light distribution files



LED XT-E  
FWHM / FWTM 152.0° / 170.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

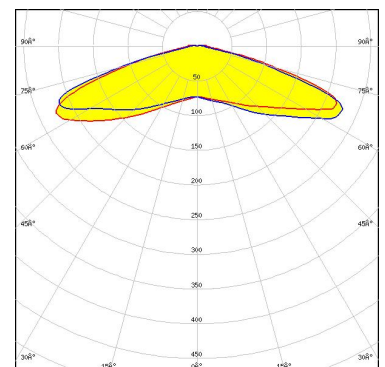


Light distribution files

#### OPTICAL RESULTS (MEASURED):

#### inventronics


LED PL-BRICK HP 3800 2x8 SSG  
FWHM / FWTM Asymmetric  
Efficiency 96 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

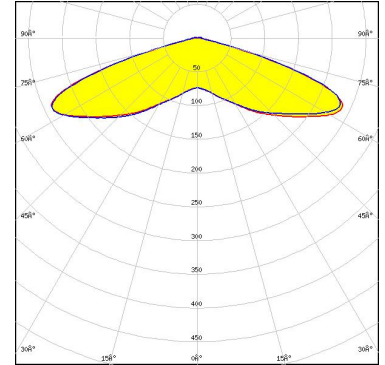

Light distribution files

#### LUMILEDS


LED LUXEON 5050 Round LES  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

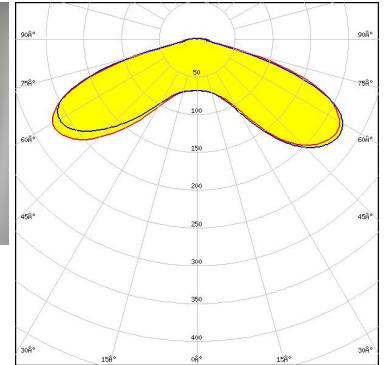

Light distribution files

#### LUMILEDS

LED LUXEON C  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type PC Amber  
Required components:

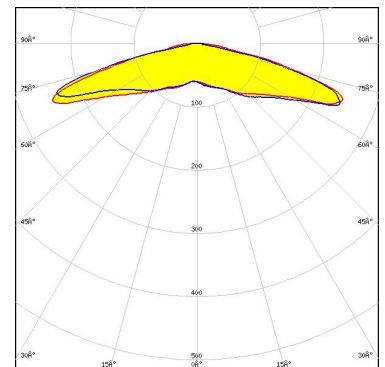


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED LUXEON V  
FWHM / FWTM 151.0° / 167.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

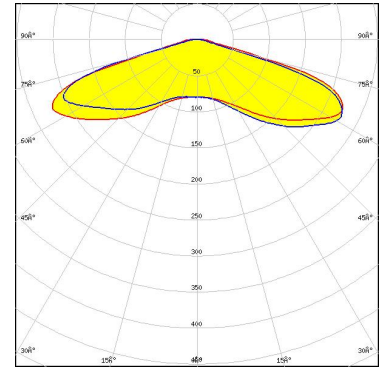

Light distribution files




LED LUXEON V2  
FWHM / FWTM 147.0° / 158.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

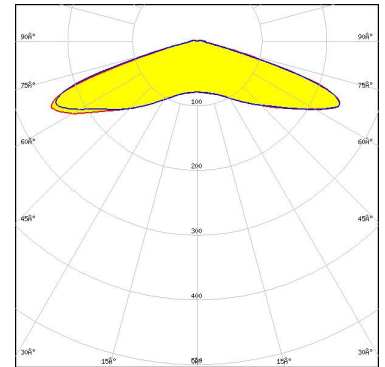

Light distribution files



LED SST-10-B130  
FWHM / FWTM 144.0° / 157.0°  
Efficiency 97 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type Deep Red  
Required components:

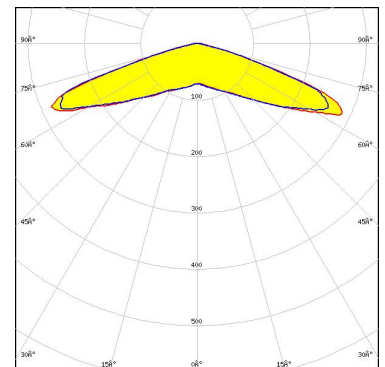


Light distribution files

#### OPTICAL RESULTS (MEASURED):

**MST** | Your solutions


LED RecLED 122x50mm 1900lm 730 2x4 Opt G1  
FWHM / FWTM Asymmetric  
Efficiency 98 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

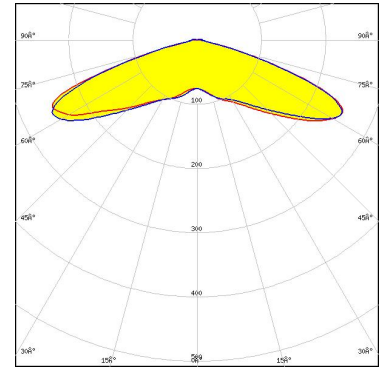

Light distribution files

**NICHIA**


LED NVSW219D  
FWHM / FWTM 152.0° / 163.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

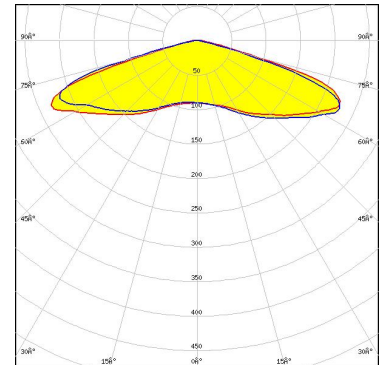

Light distribution files

**NICHIA**

LED NVSW219F  
FWHM / FWTM 151.0° / 160.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

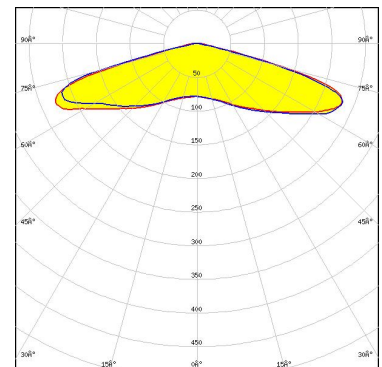


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED NVSW319B  
FWHM / FWTM 156.0° / 164.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

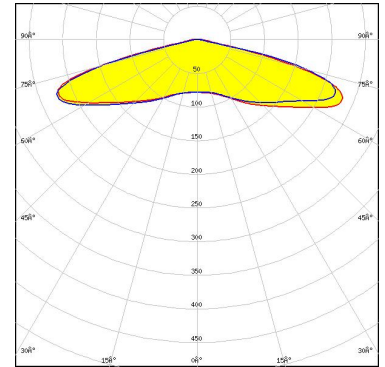

Light distribution files




LED NVSW3x9A  
FWHM / FWTM 152.0° / 161.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

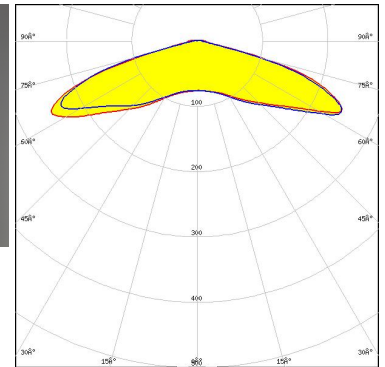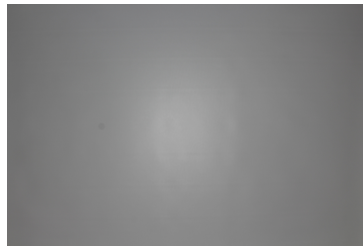

Light distribution files



LED NVSxE21A  
FWHM / FWTM 134.0° / 144.0°  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

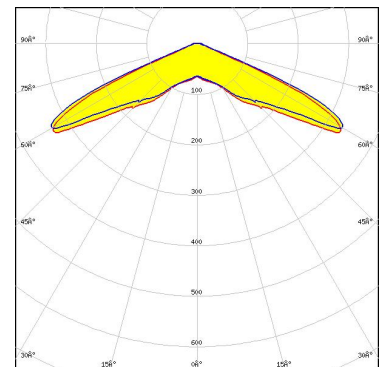

Light distribution files


#### OPTICAL RESULTS (MEASURED):

**OSRAM**  
Opto Semiconductors

LED Duris S8  
FWHM / FWTM 141.0° / 153.0°  
Efficiency 88 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

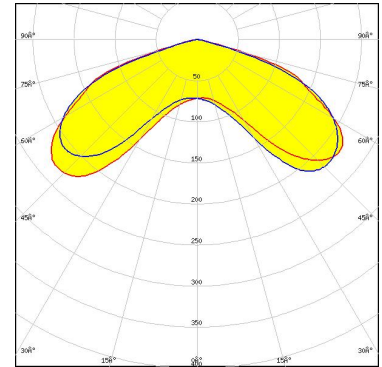

**OSRAM**  
Opto Semiconductors

LED OSLOM Square CSSRM2/CSSRM3  
FWHM / FWTM 148.0° / 159.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Light distribution files

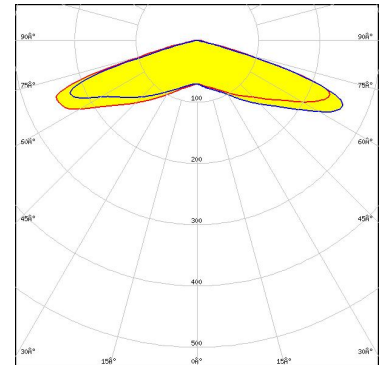

**OSRAM**  
Opto Semiconductors

LED OSLOM Square PC  
FWHM / FWTM 143.0° / 160.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files

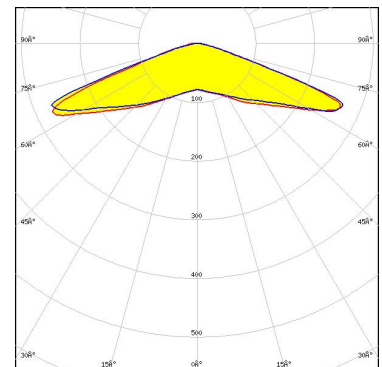




#### OPTICAL RESULTS (MEASURED):

### PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4  
FWHM / FWTM 146.0° / 156.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

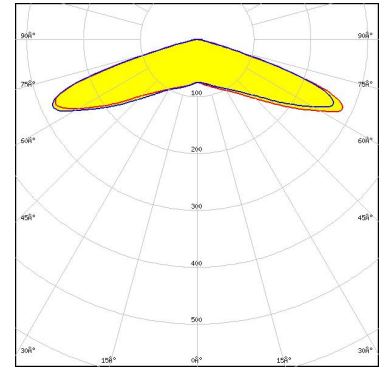

Light distribution files

### PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4+  
FWHM / FWTM 152.0° / 160.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

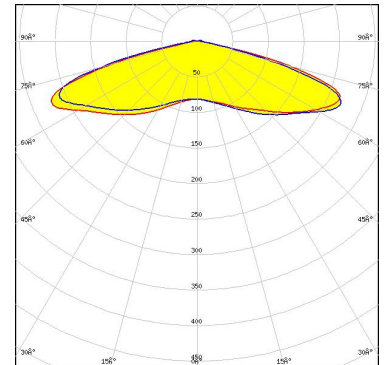

Light distribution files

### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5  
FWHM / FWTM 146.0° / 156.0°  
Efficiency 97 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

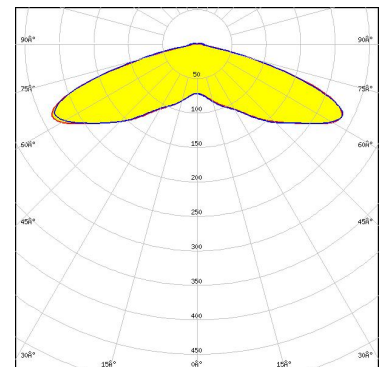


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED HiLOM RC12 Z (LH181B)  
FWHM / FWTM 138.0° / 148.0°  
Efficiency 99 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

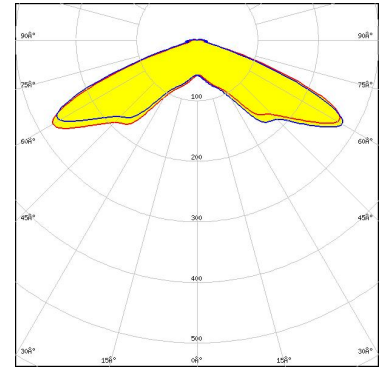

Light distribution files

### SAMSUNG


LED HiLOM RH12 Z (LH351C)  
FWHM / FWTM 147.0° / 156.0°  
Efficiency 97 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

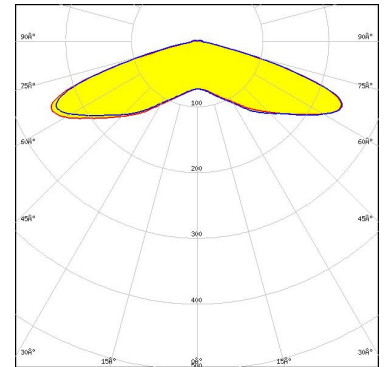

Light distribution files

### SAMSUNG

LED HiLOM RH16 (LH351C)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

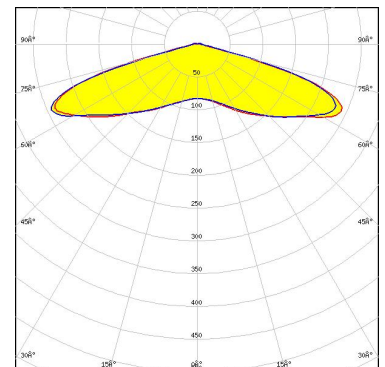


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED HiLOM RM12 Z (LH502C)  
FWHM / FWTM 144.0° / 157.0°  
Efficiency 97 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

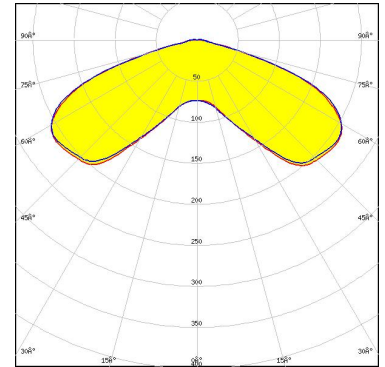

Light distribution files

### SAMSUNG


LED HiLOM RM16 Z (LH502C)  
FWHM / FWTM 144.0° / 156.0°  
Efficiency 98 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

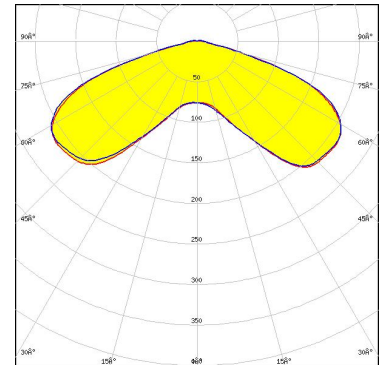

Light distribution files

### SAMSUNG

LED HiLOM RM8 Z (LH502C)  
FWHM / FWTM 144.0° / 157.0°  
Efficiency 97 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

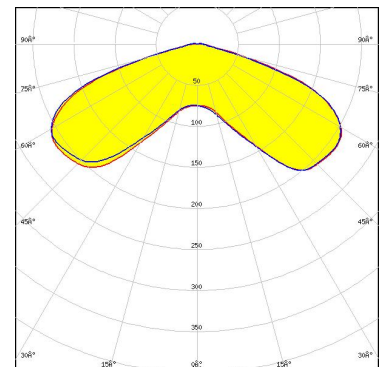


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED LH351B  
FWHM / FWTM 153.0° / 161.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

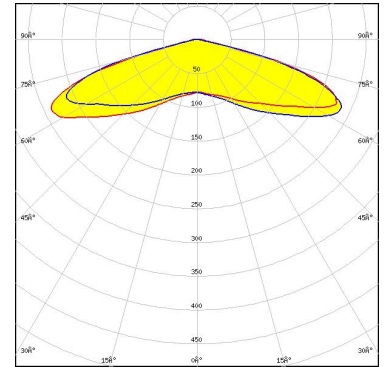

Light distribution files

### SAMSUNG


LED LH351C  
FWHM / FWTM 149.0° / 157.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

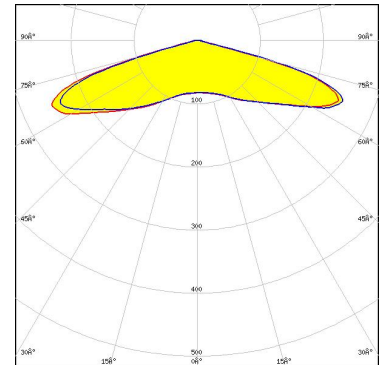

Light distribution files

### SAMSUNG

LED LH351D  
FWHM / FWTM 156.0° / 162.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

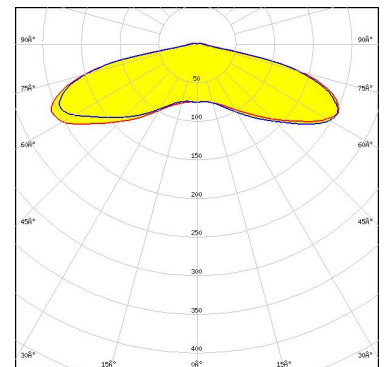


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG

LED LH508A  
 FWHM / FWTM 146.0° / 157.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/m  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

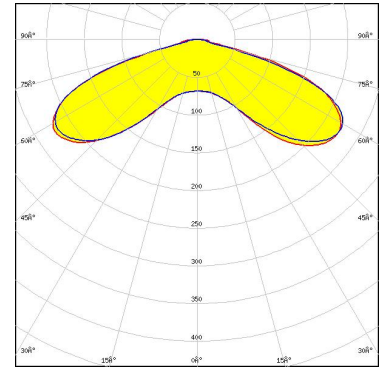


Light distribution files

### SEITEC

Elektronik GmbH

LED LED-Pa-L15c2W11c2-xxx-C050-01  
 FWHM / FWTM 146.0° / 156.0°  
 Efficiency 98 %  
 Peak intensity 0.4 cd/m  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

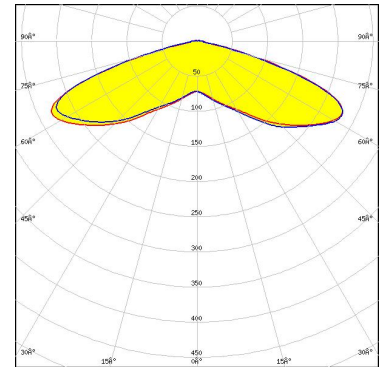


Light distribution files

### SEUL

SEOUL SEMICONDUCTOR

LED Z5M3  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/m  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

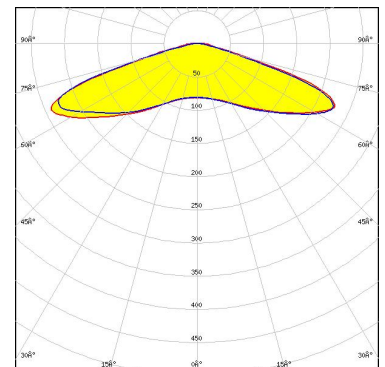


Light distribution files


#### OPTICAL RESULTS (MEASURED):

  
SEOL SEMICONDUCTOR


LED: Z5M4  
 FWHM / FWTM: 144.0° / 149.0°  
 Efficiency: 98 %  
 Peak intensity: 0.5 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

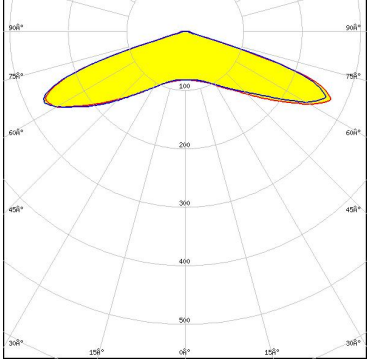


Light distribution files


  
SEOL SEMICONDUCTOR

LED: Z8Y22  
 FWHM / FWTM: 141.0° / 151.0°  
 Efficiency: 94 %  
 Peak intensity: 0.5 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:




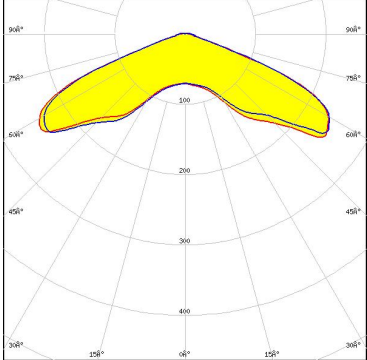

Light distribution files

  
SEOL SEMICONDUCTOR

LED: Z8Y22P  
 FWHM / FWTM: 146.0° / 161.0°  
 Efficiency: 94 %  
 Peak intensity: 0.5 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

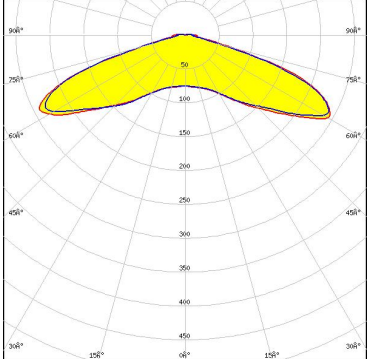

Light distribution files


#### OPTICAL RESULTS (MEASURED):

### TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

### TRIDONIC


LED RLE 2x8 4000lm HP EXC2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

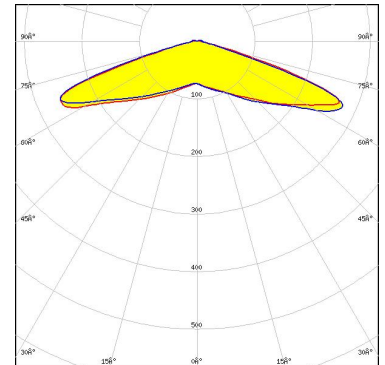

Light distribution files

### TRIDONIC

LED RLE 2x8 6000lm HP HE EXC3 OTD  
FWHM / FWTM 144.0° / 156.0°  
Efficiency 98 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

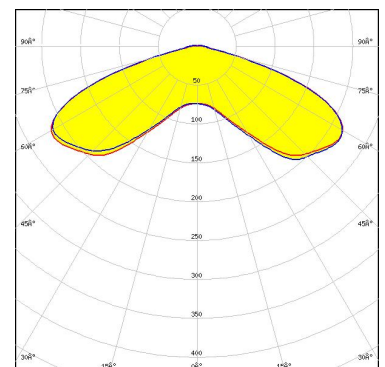


Light distribution files



#### OPTICAL RESULTS (MEASURED):

### TRIDONIC


LED RLE G1 49x121mm 2000lm xxx EXC OTD  
FWHM / FWTM 139.0° / 155.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

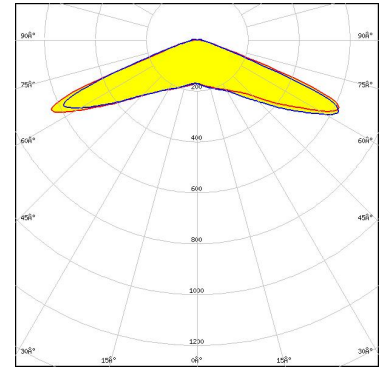

Light distribution files

### TRIDONIC


LED RLE G1 49x133mm 2000lm xxx EXC OTD  
FWHM / FWTM 139.0° / 155.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

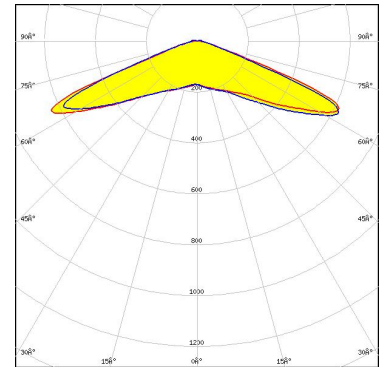

Light distribution files

### TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD  
FWHM / FWTM 139.0° / 155.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

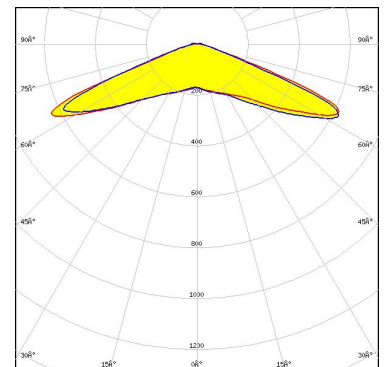


Light distribution files

#### OPTICAL RESULTS (MEASURED):




### TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD  
FWHM / FWTM 139.0° / 155.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

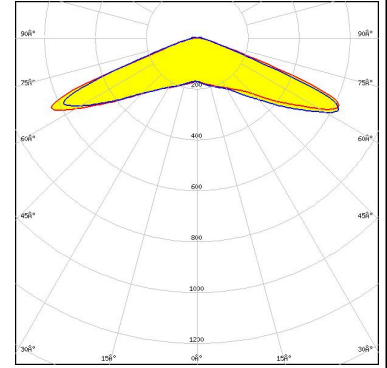

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

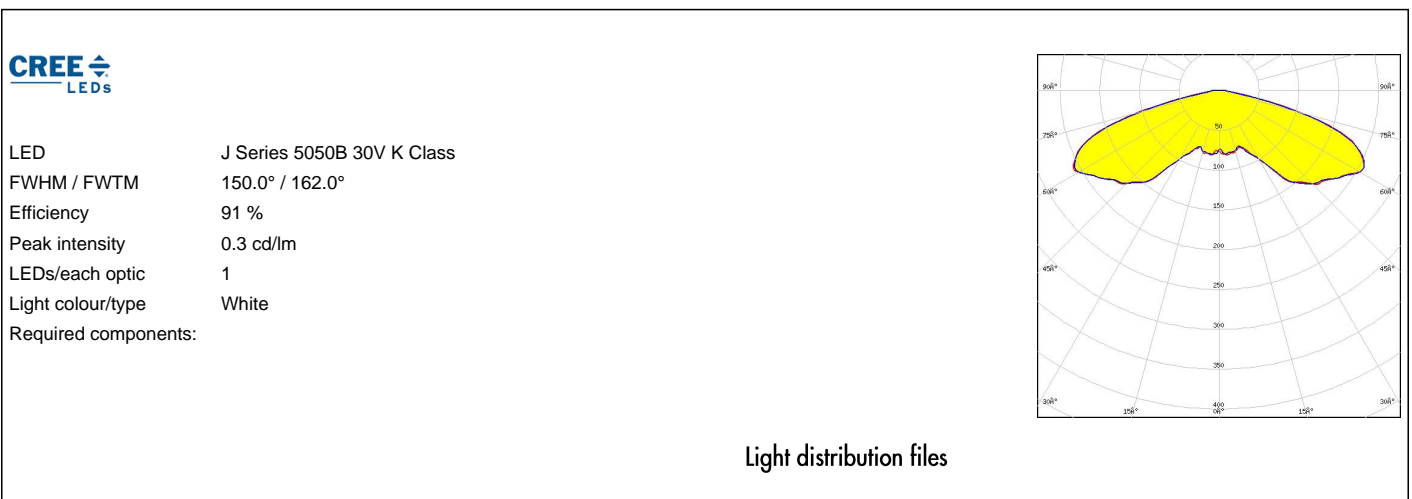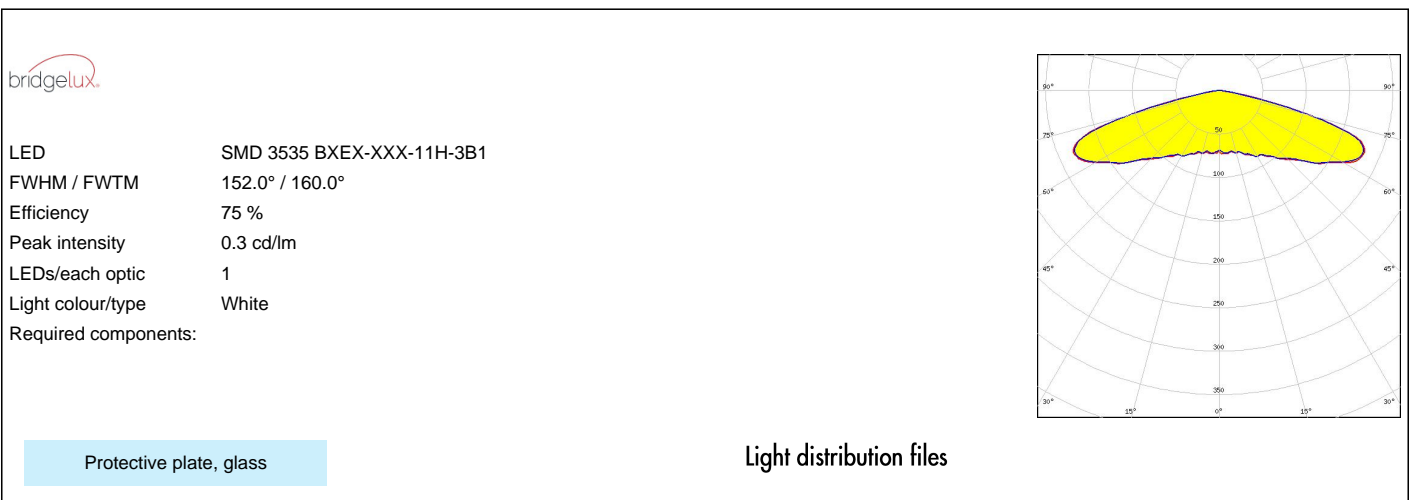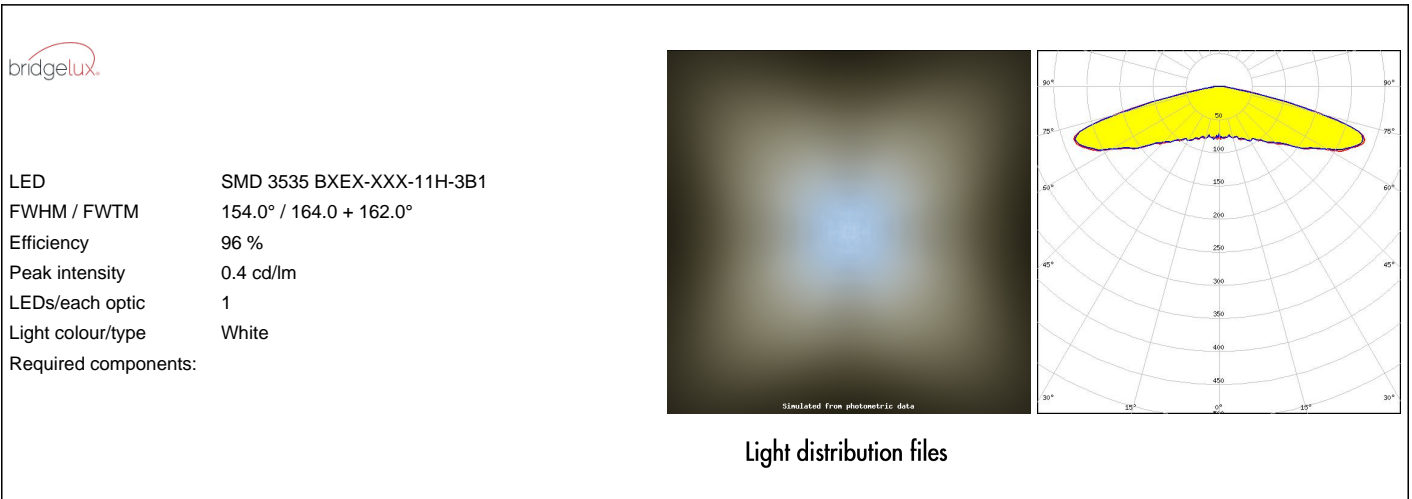


#### OPTICAL RESULTS (SIMULATED):



LED J Series 5050B 30V K Class  
FWHM / FWTM 146.0° / 160.0°  
Efficiency 74 %  
Peak intensity 0.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Protective plate, glass

Light distribution files

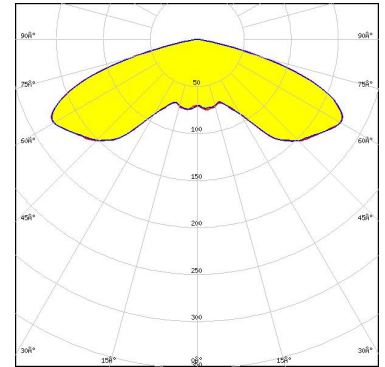

LED J Series 5050B 6V K Class  
FWHM / FWTM 148.0° / 160.0°  
Efficiency 97 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Light distribution files

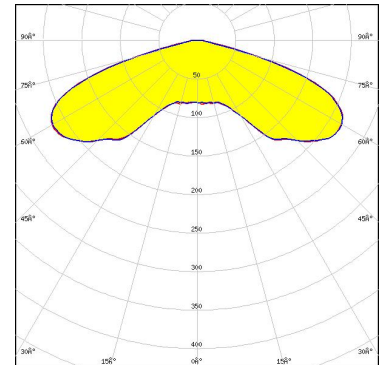

LED J Series 5050B 6V K Class  
FWHM / FWTM 144.0° / 158.0°  
Efficiency 80 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

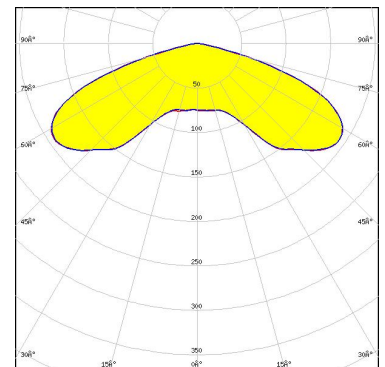

#### OPTICAL RESULTS (SIMULATED):




LED J Series 5050C 6V E Class  
 FWHM / FWTM Asymmetric  
 Efficiency 69 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

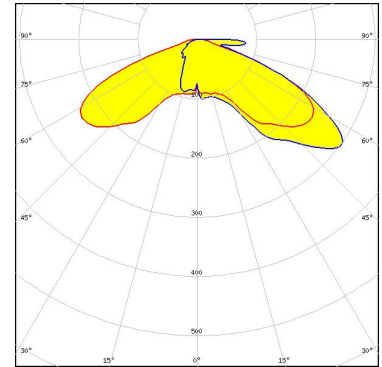

Light distribution files




LED J Series 5050C 6V E Class  
 FWHM / FWTM Asymmetric  
 Efficiency 52 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

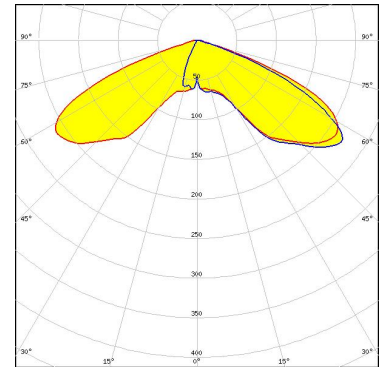

Light distribution files



LED XB-D  
 FWHM / FWTM 151.0° / 180.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

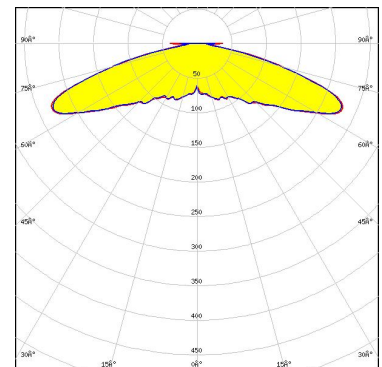


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XM-L  
FWHM / FWTM 152.0° / 161.0°  
Efficiency 96 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

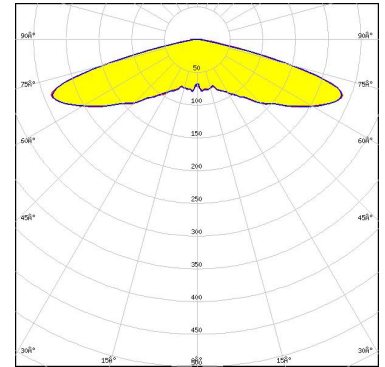

Light distribution files




LED XM-L2  
FWHM / FWTM 152.0° / 160.0°  
Efficiency 96 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

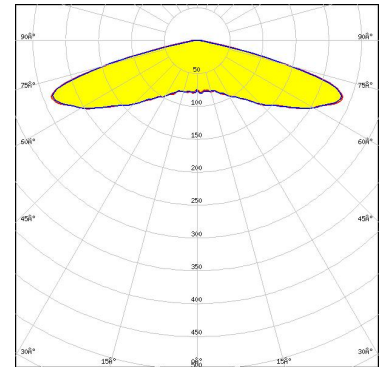

Light distribution files



LED XP-G  
FWHM / FWTM 152.0° / 163.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

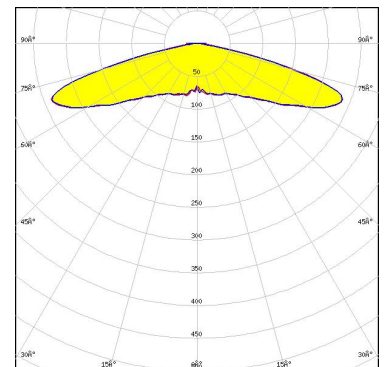

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED XP-G3  
FWHM / FWTM 150.0° / 161.0°  
Efficiency 74 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

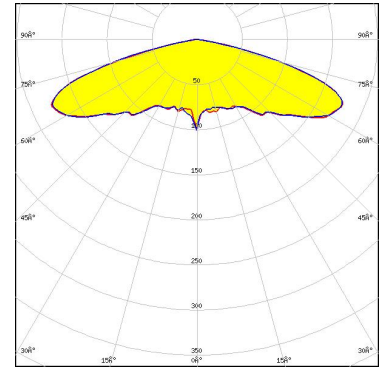

LED XP-G4  
FWHM / FWTM 142.0° / 150.0°  
Efficiency 80 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Protective plate, glass

Light distribution files

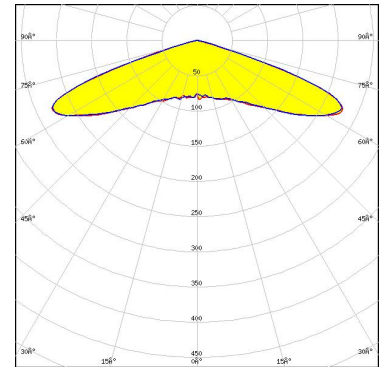

LED XP-G4  
FWHM / FWTM 144.0° / 150.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files

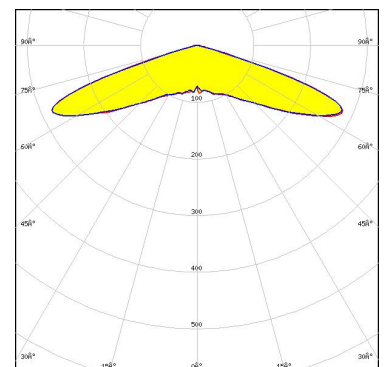




#### OPTICAL RESULTS (SIMULATED):




LED XP-L2  
FWHM / FWTM 151.0° / 161.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

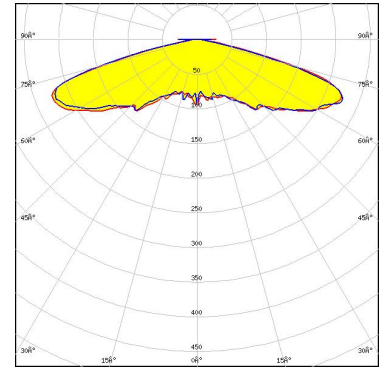

Light distribution files



LED XP-P  
FWHM / FWTM 144.0° / 156.0°  
Efficiency 78 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

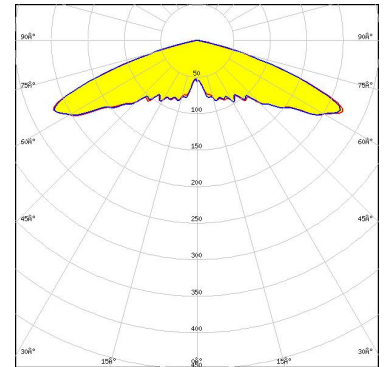


Protective plate, glass

Light distribution files



LED PrevaLED Brick HP 2x8  
FWHM / FWTM 146.0° / 160.0°  
Efficiency 93 %  
Peak intensity 1.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

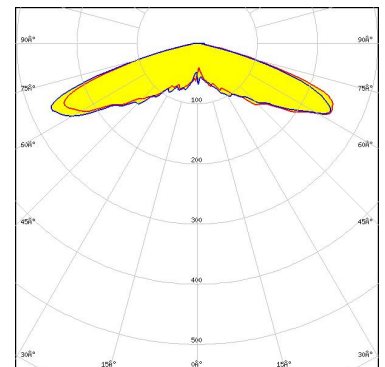

Light distribution files

#### OPTICAL RESULTS (SIMULATED):


**LUMILEDS**

LED	LUXEON 3030 2D (Round LES)
FWHM / FWTM	142.0° / 154.0°
Efficiency	86 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White

Required components:

Protective plate, glass

Light distribution files

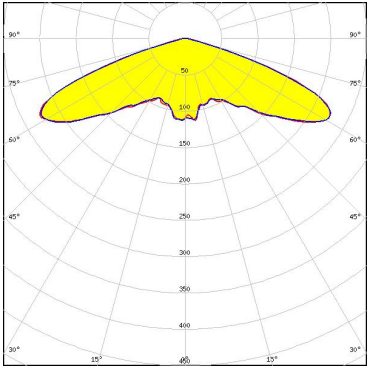


**LUMILEDS**

LED	LUXEON 5050 HE Plus
FWHM / FWTM	146.0° / 158.0°
Efficiency	80 %
Peak intensity	0.2 cd/lm
LEDs/each optic	1
Light colour/type	White

Required components:

Protective plate, glass

Light distribution files

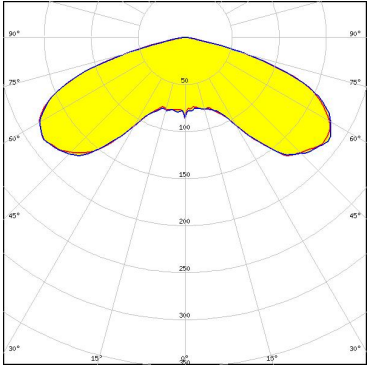


**LUMILEDS**

LED	LUXEON 5050 Round LES
FWHM / FWTM	Asymmetric
Efficiency	81 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White

Required components:

Protective plate, glass


Light distribution files

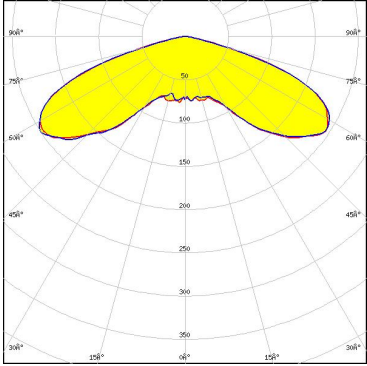

### OPTICAL RESULTS (SIMULATED):




LED LUXEON 5050 Square LES  
FWHM / FWTM 148.0° / 161.0°  
Efficiency 96 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

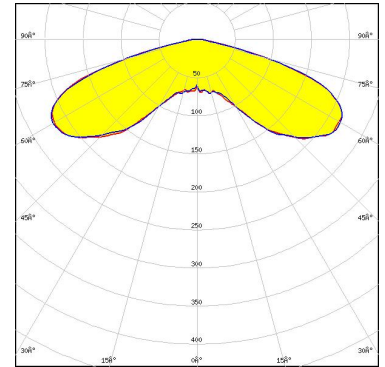

Light distribution files



LED LUXEON 5050 Square LES  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

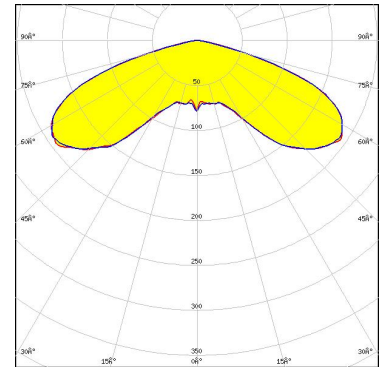


Protective plate, glass

Light distribution files



LED LUXEON HL2X  
FWHM / FWTM 150.0° / 158.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


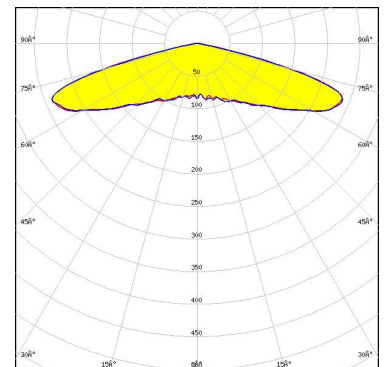


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON HL2X-V  
 FWHM / FWTM 152.0° / 160.0°  
 Efficiency 96 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

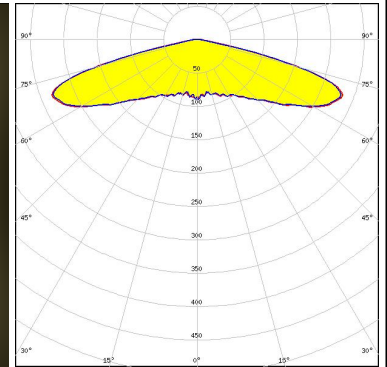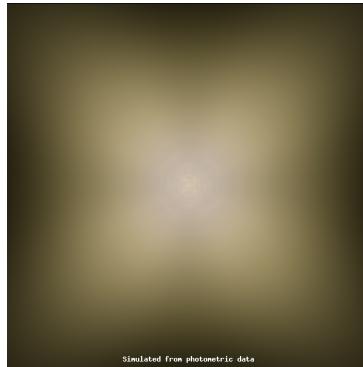

Light distribution files



LED LUXEON HL2X-V  
 FWHM / FWTM 150.0° / 158.0°  
 Efficiency 76 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

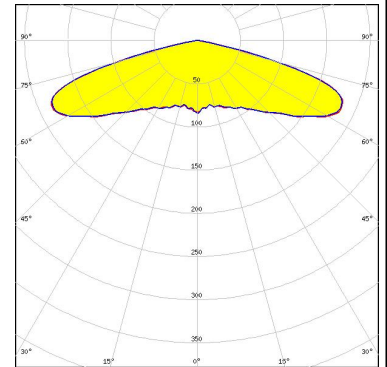


Protective plate, glass

Light distribution files



LED LUXEON HL2Z  
 FWHM / FWTM 142.0° / 152.0°  
 Efficiency 95 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

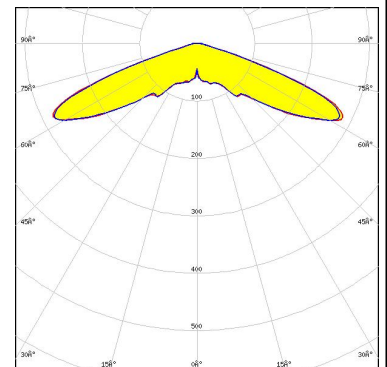

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED LUXEON HL2Z  
 FWHM / FWTM 140.0° / 152.0°  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

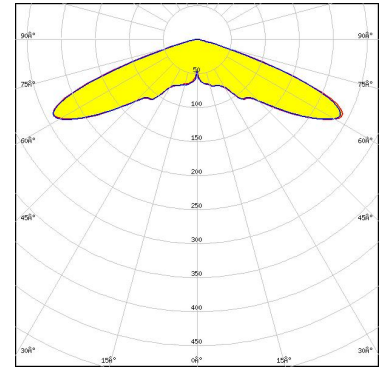

LED LUXEON HL4X  
 FWHM / FWTM 152.0° / 162.0°  
 Efficiency 75 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

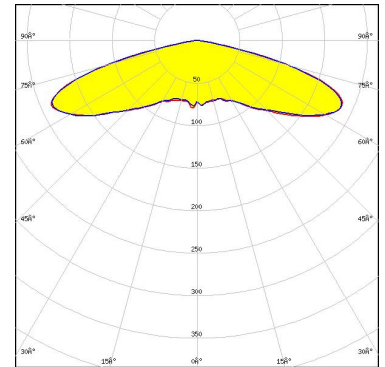

LED LUXEON HL4X  
 FWHM / FWTM 154.0° / 162.0°  
 Efficiency 96 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

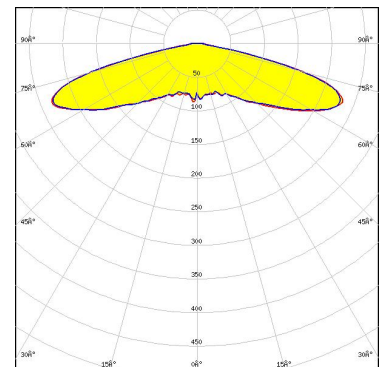

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON MZ  
FWHM / FWTM 146.0° / 157.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

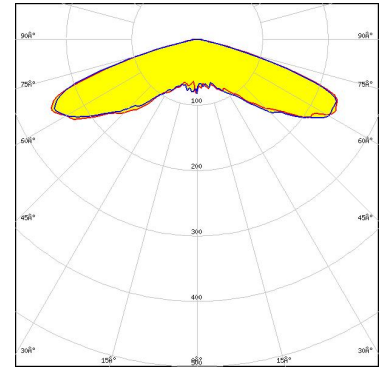

Light distribution files




LED LUXEON Rebel ES  
FWHM / FWTM 146.0° / 158.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

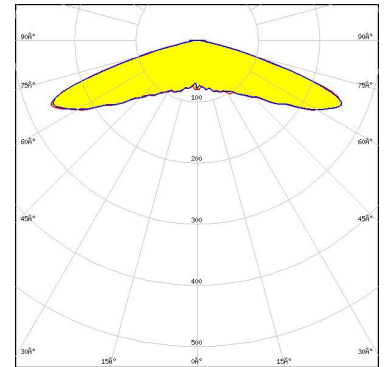

Light distribution files



LED LUXEON T  
FWHM / FWTM 150.0° / 160.0°  
Efficiency 96 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

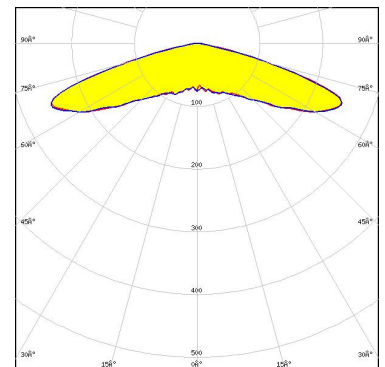


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON TX  
FWHM / FWTM 150.0° / 160.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

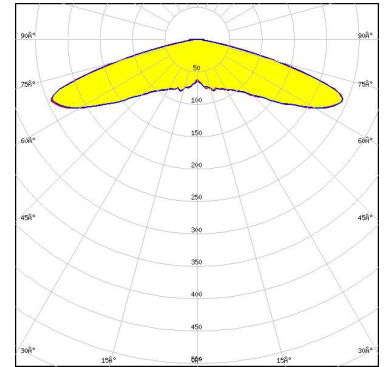

Light distribution files




LED LUXEON TX  
FWHM / FWTM 150.0° / 161.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

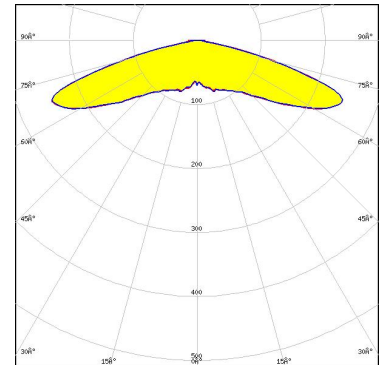

Light distribution files



LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)  
FWHM / FWTM 150.0° / 160.0°  
Efficiency 76 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

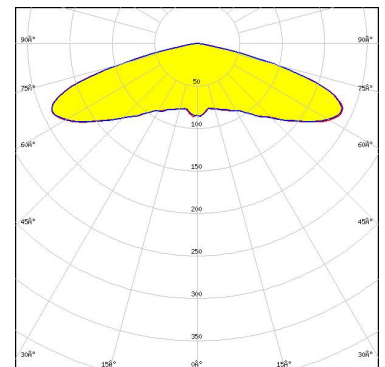

Protective plate, glass


Light distribution files



#### OPTICAL RESULTS (SIMULATED):





LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)  
 FWHM / FWTM 152.0° / 160.0°  
 Efficiency 96 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

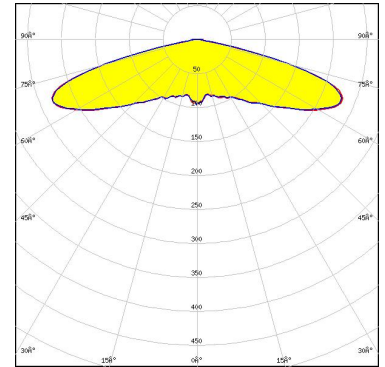

Light distribution files




LED SST-20F-W  
 FWHM / FWTM 144.0° / 152.0°  
 Efficiency 97 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

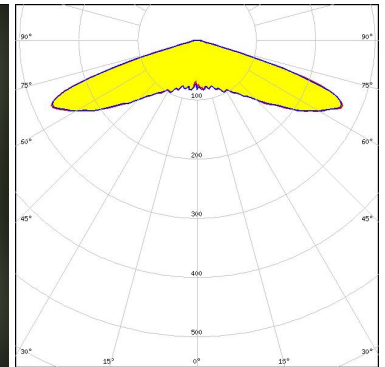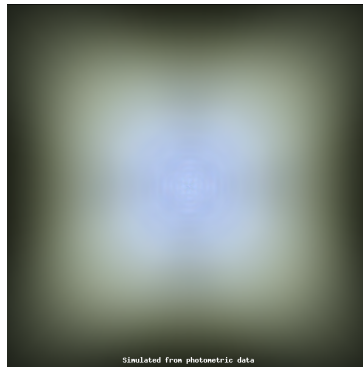

Light distribution files






LED SST-20F-W  
 FWHM / FWTM 144.0° / 152.0°  
 Efficiency 80 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

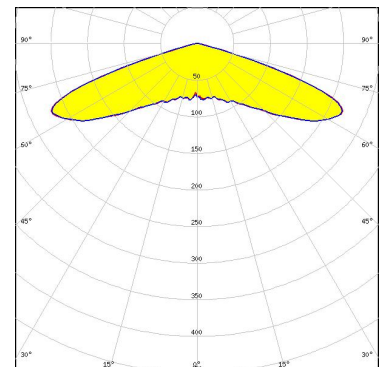



Protective plate, glass

Light distribution files




#### OPTICAL RESULTS (SIMULATED):

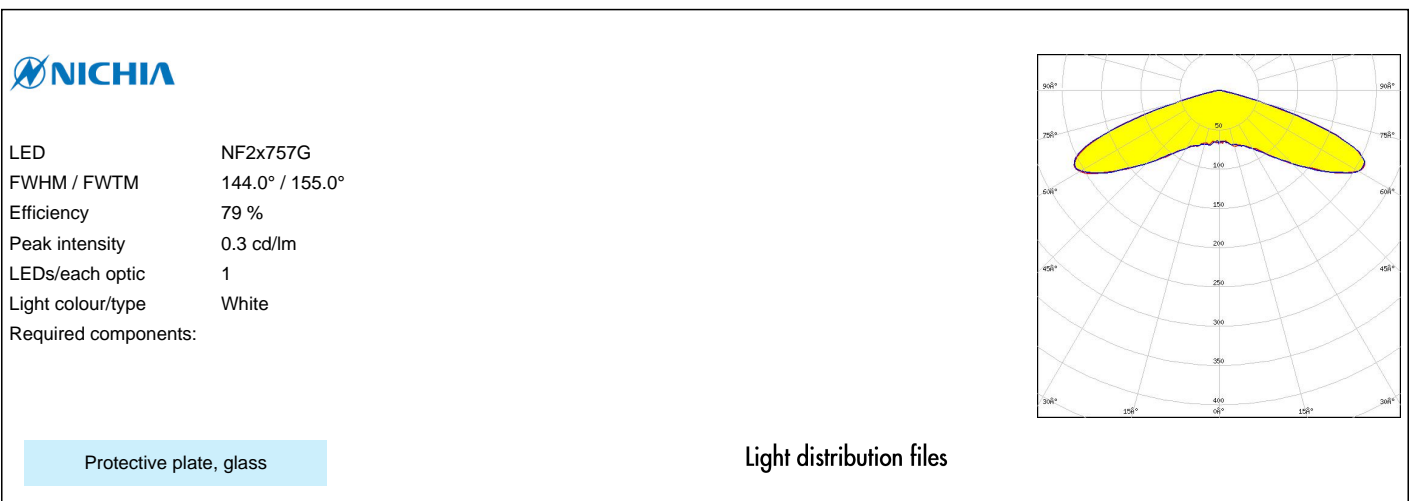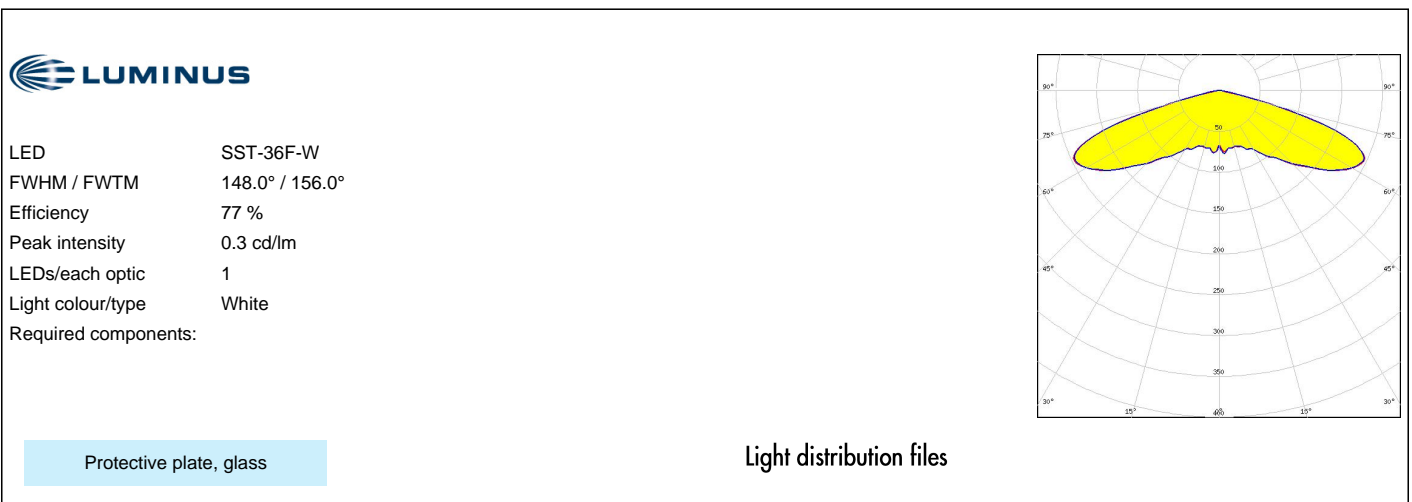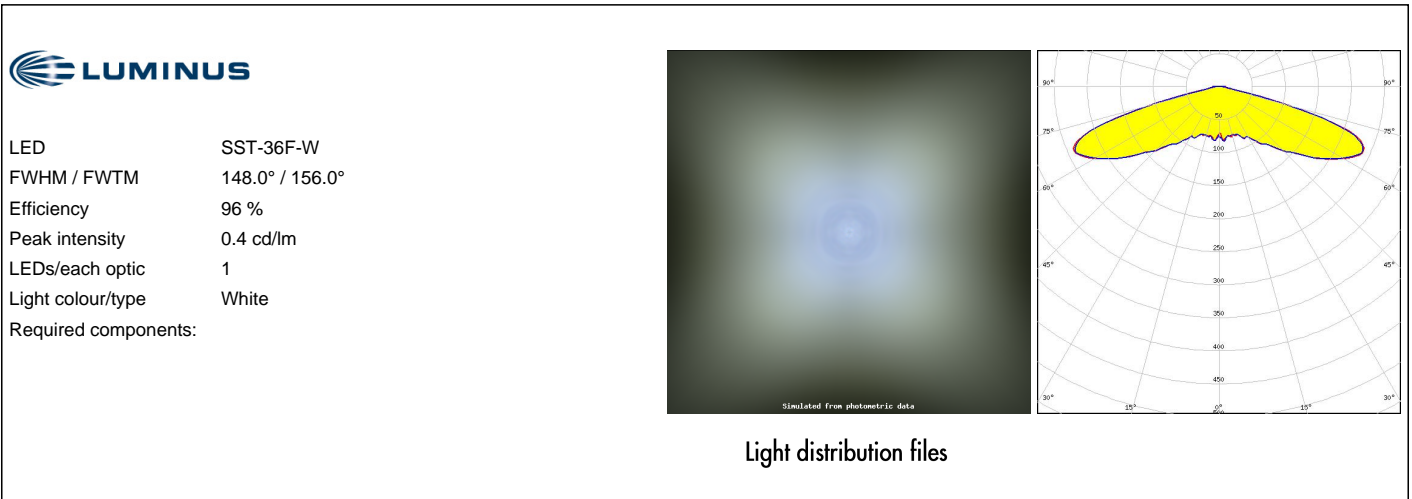

#### OPTICAL RESULTS (SIMULATED):

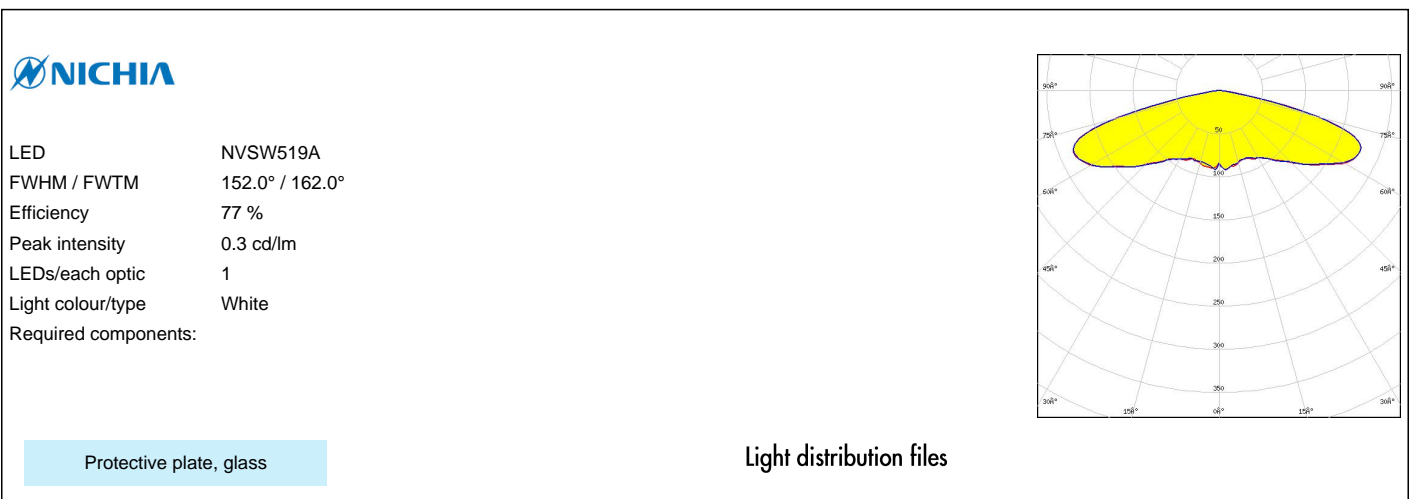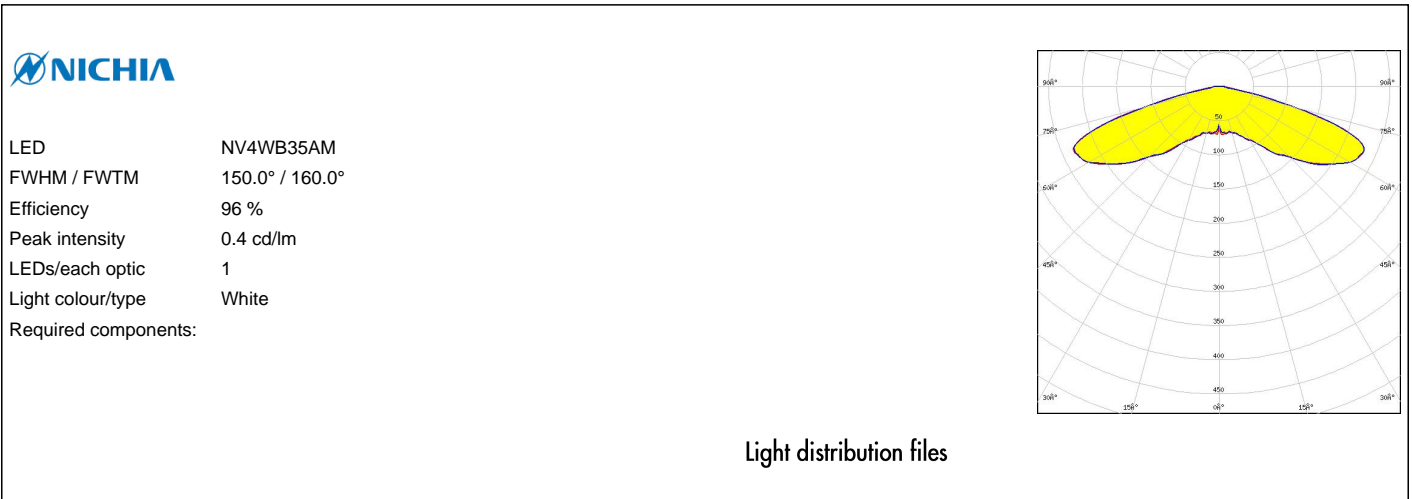


#### OPTICAL RESULTS (SIMULATED):

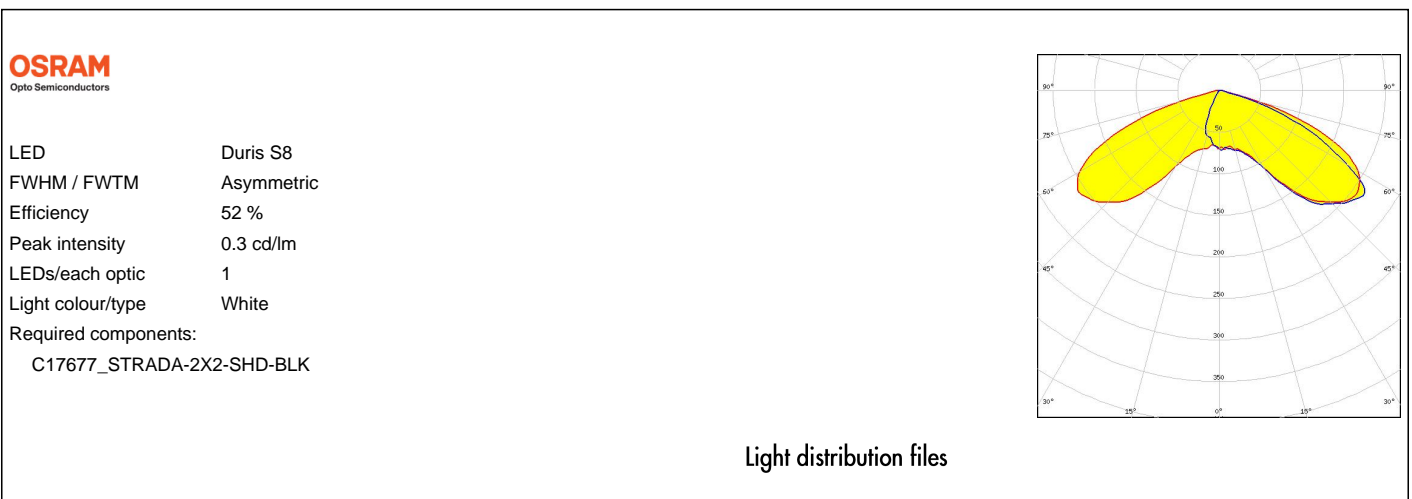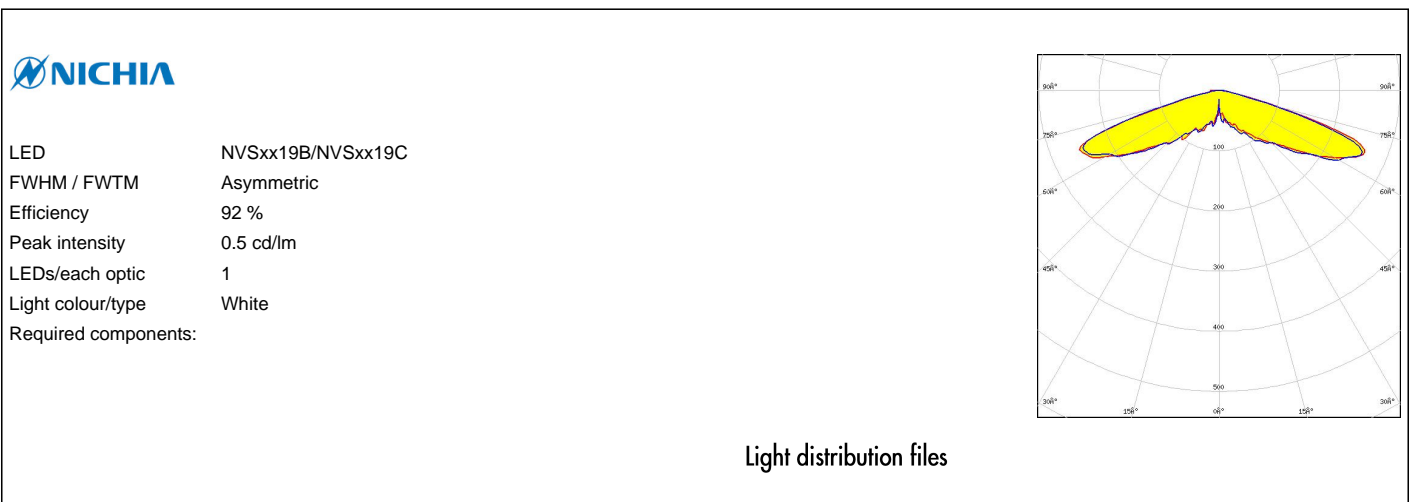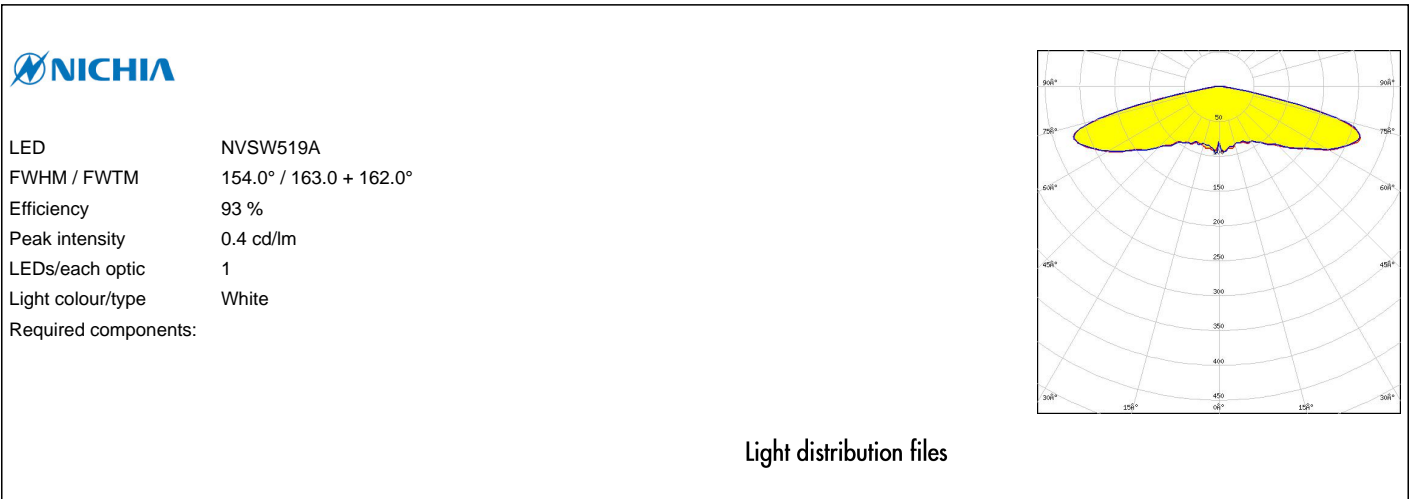

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED Duris S8  
FWHM / FWTM 144.0° / 160.0 + 162.0°  
Efficiency 93 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

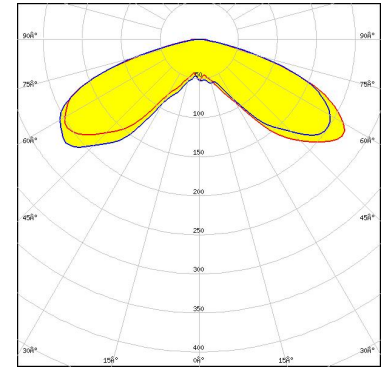

Light distribution files

**OSRAM**  
Opto Semiconductors


LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 67 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

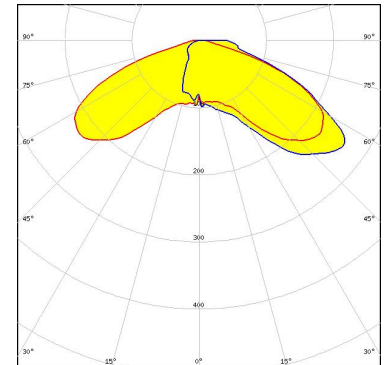

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSCONIQ C 2424  
FWHM / FWTM 146.0° / 160.0°  
Efficiency 95 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

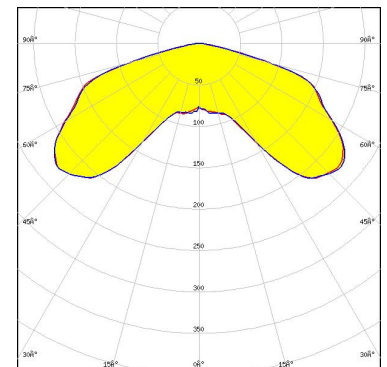


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ P 3030  
FWHM / FWTM 148.0° / 162.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

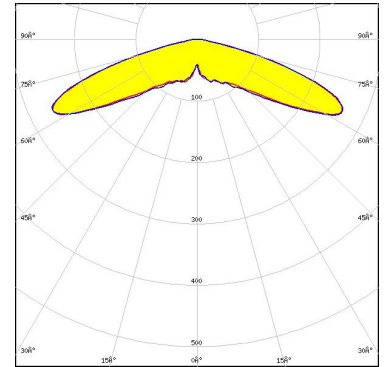

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSCONIQ P 3737 (2W version)  
FWHM / FWTM 144.0° / 158.0°  
Efficiency 93 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

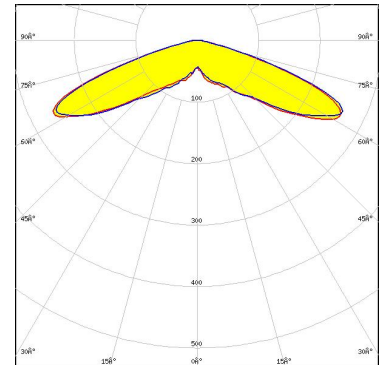

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (3W version)  
FWHM / FWTM 148.0° / 164.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

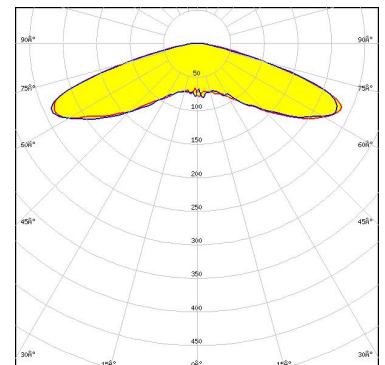


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ S 5050 SFC  
 FWHM / FWTM 148.0° / 160.0°  
 Efficiency 95 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

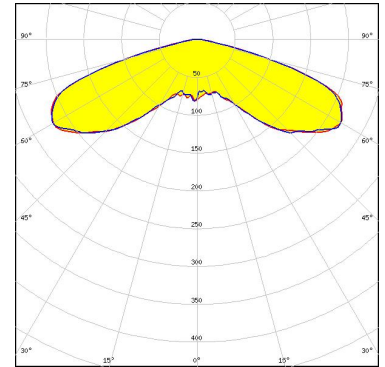

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSCONIQ S 5050 SFC  
 FWHM / FWTM Asymmetric  
 Efficiency 66 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

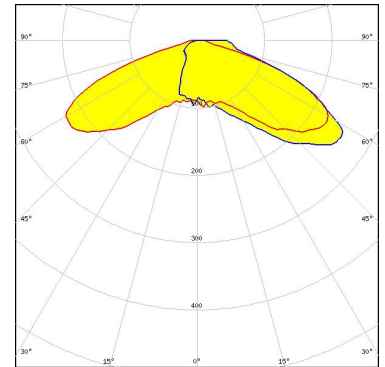

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSCONIQ S 5050 SFC  
 FWHM / FWTM Asymmetric  
 Efficiency 51 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

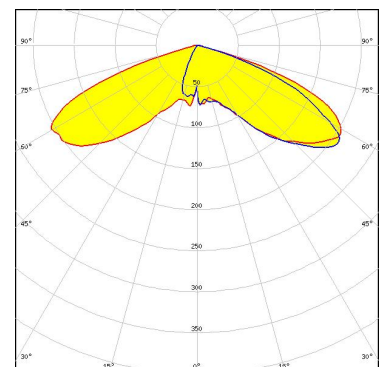

Light distribution files




#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSLON Pure 1414  
 FWHM / FWTM 144.0° / 156.0°  
 Efficiency 78 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

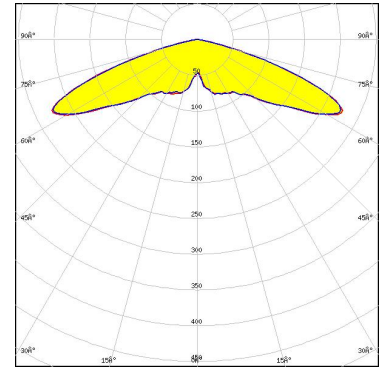

**OSRAM**  
Opto Semiconductors

LED OSLON Pure 1414  
 FWHM / FWTM 146.0° / 158.0°  
 Efficiency 97 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

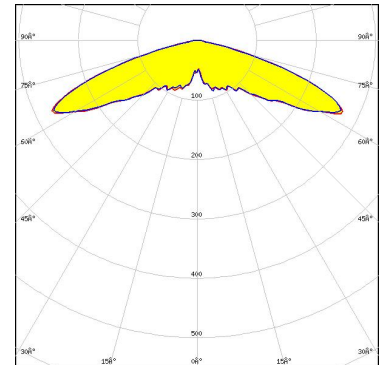


**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 42 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

Protective plate, glass

Light distribution files

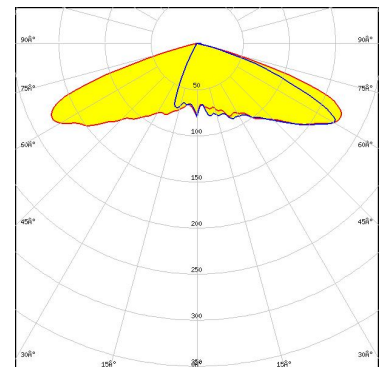




#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSLO<sup>®</sup>N Square CSSRM2/CSSRM3  
 FWHM / FWTM 146.0° / 156.0°  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

Light distribution files

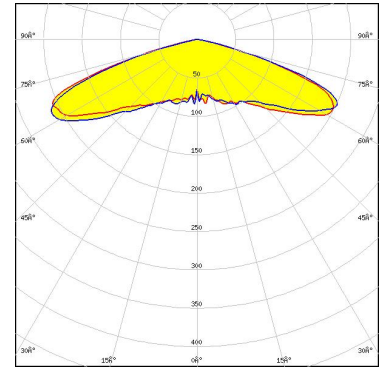


**OSRAM**  
Opto Semiconductors

LED OSLO<sup>®</sup>N Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 57 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

Protective plate, glass


Light distribution files

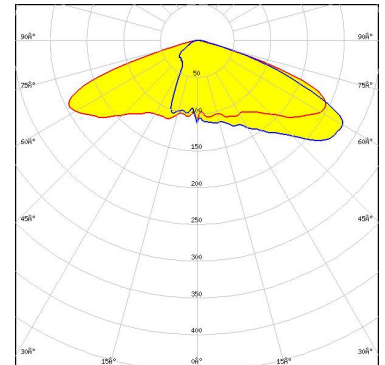

**OSRAM**  
Opto Semiconductors

LED OSLO<sup>®</sup>N Square EC  
 FWHM / FWTM 144.0° / 156.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

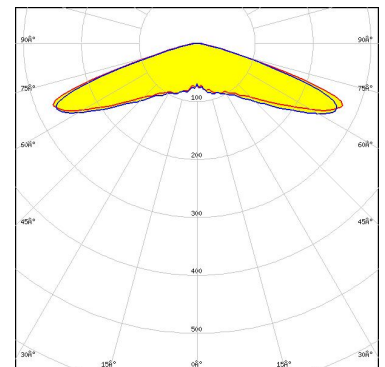

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square PC  
FWHM / FWTM 144.0° / 162.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

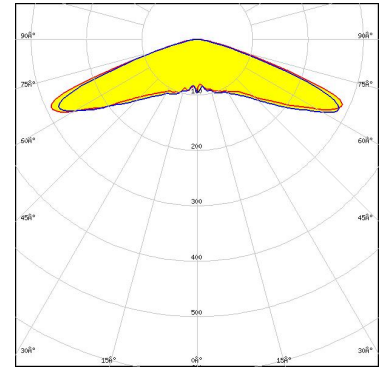

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSLON SSL 150  
FWHM / FWTM 152.0° / 160.0°  
Efficiency 96 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

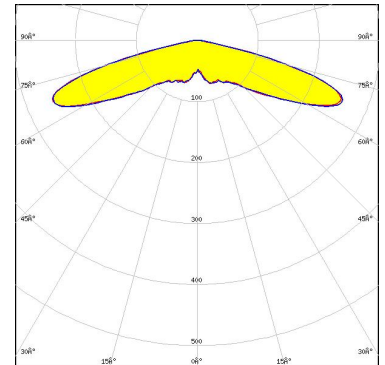

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON SSL 80  
FWHM / FWTM 138.0° / 164.0°  
Efficiency 95 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

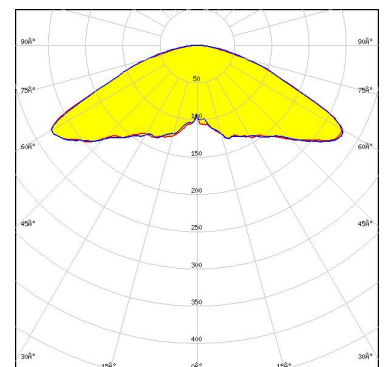


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED SFH 4714A  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

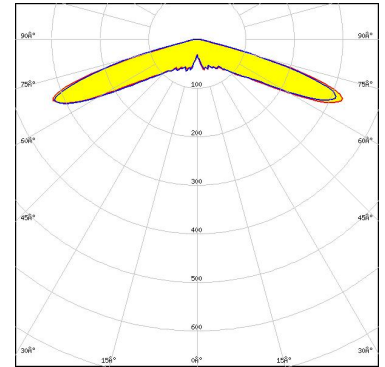

Light distribution files

**OSRAM**  
Opto Semiconductors


LED SFH 4714A  
 FWHM / FWTM 148.0° / 156.0°  
 Efficiency 96 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

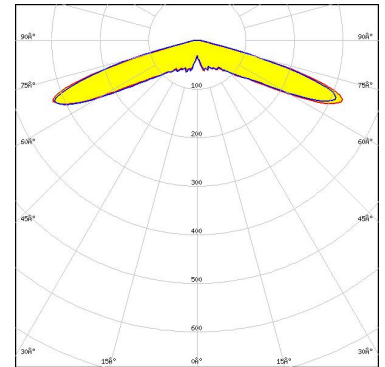

Light distribution files

**PHILIPS**

LED Fortimo FastFlex LED 2x2 DA G5  
 FWHM / FWTM Asymmetric  
 Efficiency 42 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

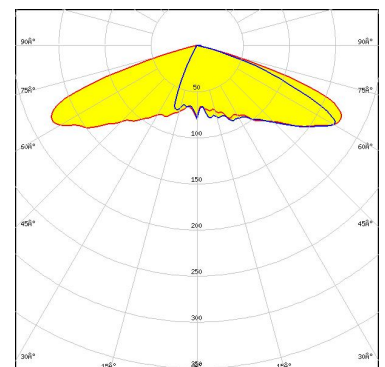


Light distribution files

Protective plate, glass

#### OPTICAL RESULTS (SIMULATED):

### PHILIPS


LED Fortimo FastFlex LED 2x8 DA (U)HE  
 FWHM / FWTM 148.0° / 162.0 + 160.0°  
 Efficiency 97 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

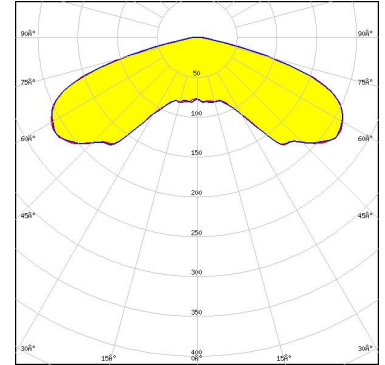

Light distribution files

### PHILIPS

LED Fortimo FastFlex LED 2x8 DA (U)HE  
 FWHM / FWTM 144.0° / 158.0°  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

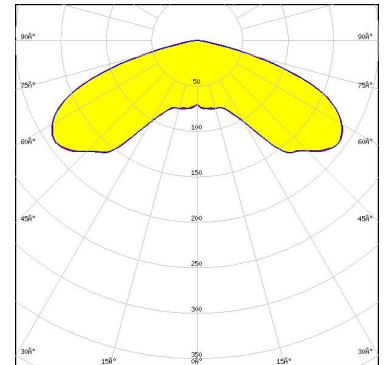


Light distribution files

Protective plate, glass

### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+  
 FWHM / FWTM Asymmetric  
 Efficiency 43 %  
 Peak intensity 0.2 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

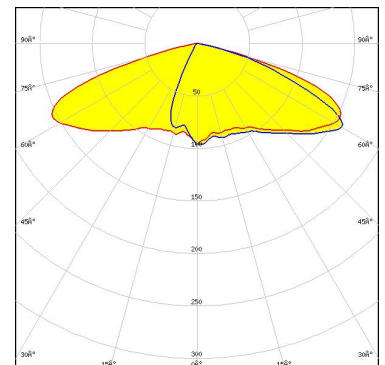


Light distribution files

Protective plate, glass

#### OPTICAL RESULTS (SIMULATED):

### PHILIPS


LED Fortimo FastFlex LED 2x8 DA G4+  
FWHM / FWTM Asymmetric  
Efficiency 50 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

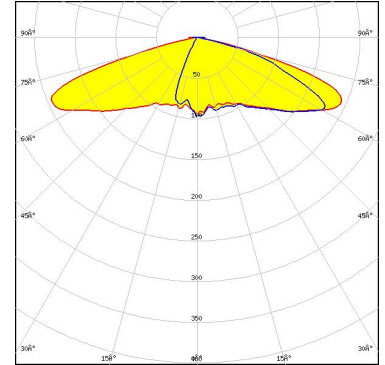

Light distribution files

### PHILIPS


LED Fortimo FastFlex LED 2x8 DAX G4  
FWHM / FWTM 154.0° / 165.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

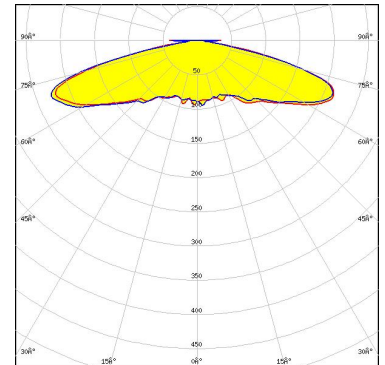

Light distribution files

### PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4  
FWHM / FWTM 152.0° / 164.0°  
Efficiency 74 %  
Peak intensity 0.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

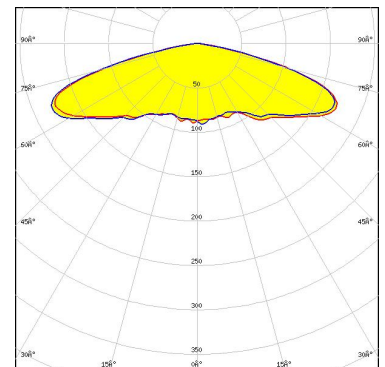

Protective plate, glass

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG

LED HiLOM RH12 Z (LH351C)  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass

Light distribution files

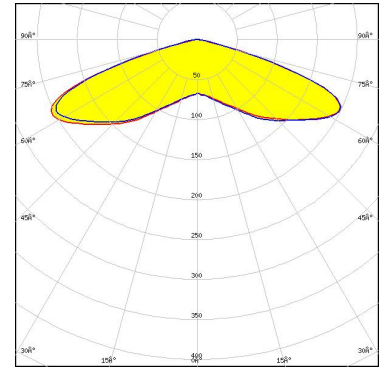


### SAMSUNG

LED LH351B  
FWHM / FWTM Asymmetric  
Efficiency 78 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass

Light distribution files

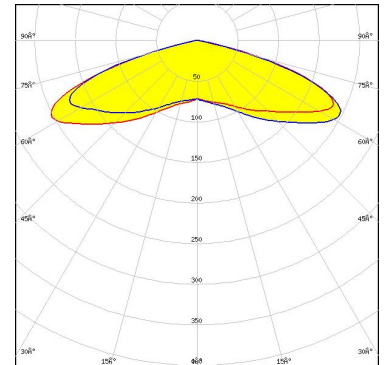


### SAMSUNG

LED LH351C  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

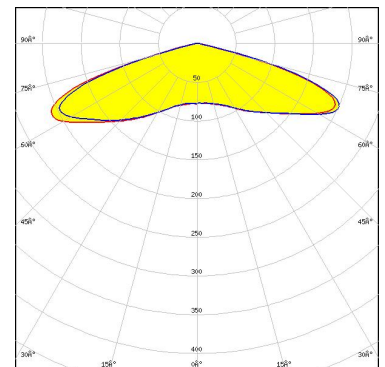

#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED LH502C  
FWHM / FWTM 146.0° / 160.0°  
Efficiency 97 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

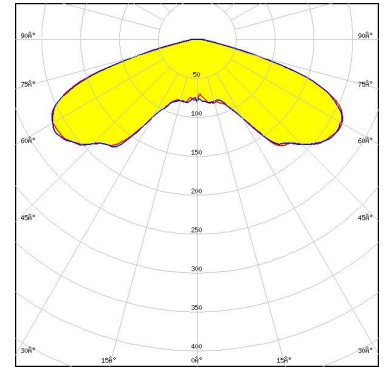

Light distribution files

### SAMSUNG

LED LH502C  
FWHM / FWTM 144.0° / 156.0°  
Efficiency 80 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

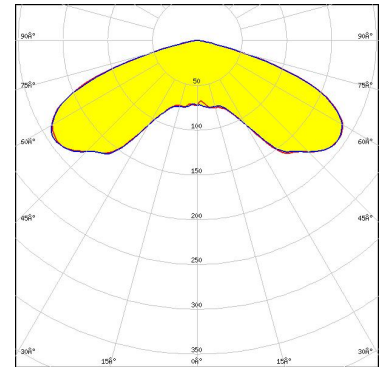


Protective plate, glass

Light distribution files

### SAMSUNG

LED LH502D  
FWHM / FWTM Asymmetric  
Efficiency 52 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

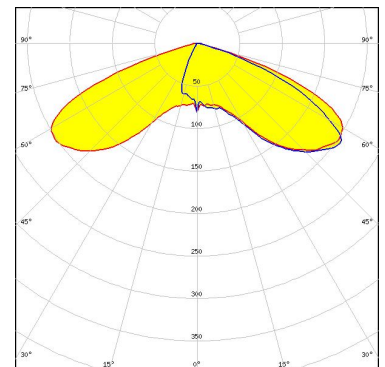


Light distribution files



#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED LH502D  
FWHM / FWTM 148.0° / 162.0 + 160.0°  
Efficiency 97 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

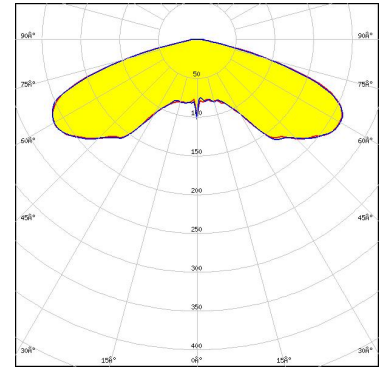

Light distribution files

### SAMSUNG


LED LH502D  
FWHM / FWTM Asymmetric  
Efficiency 66 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

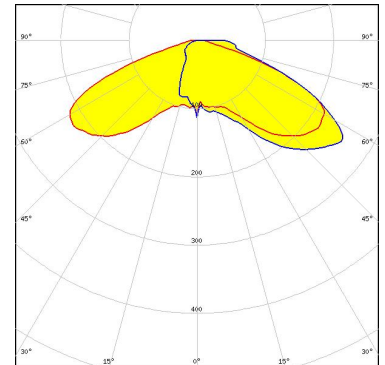

Light distribution files

### SAMSUNG

LED LH502D  
FWHM / FWTM 145.0 + 144.0° / 158.0°  
Efficiency 79 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


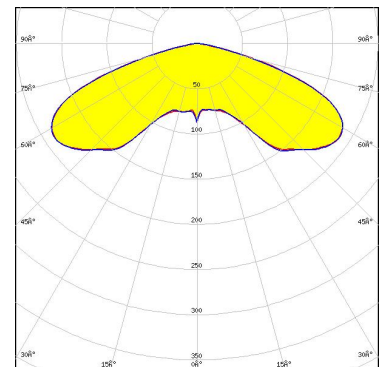


Protective plate, glass




Light distribution files






#### OPTICAL RESULTS (SIMULATED):

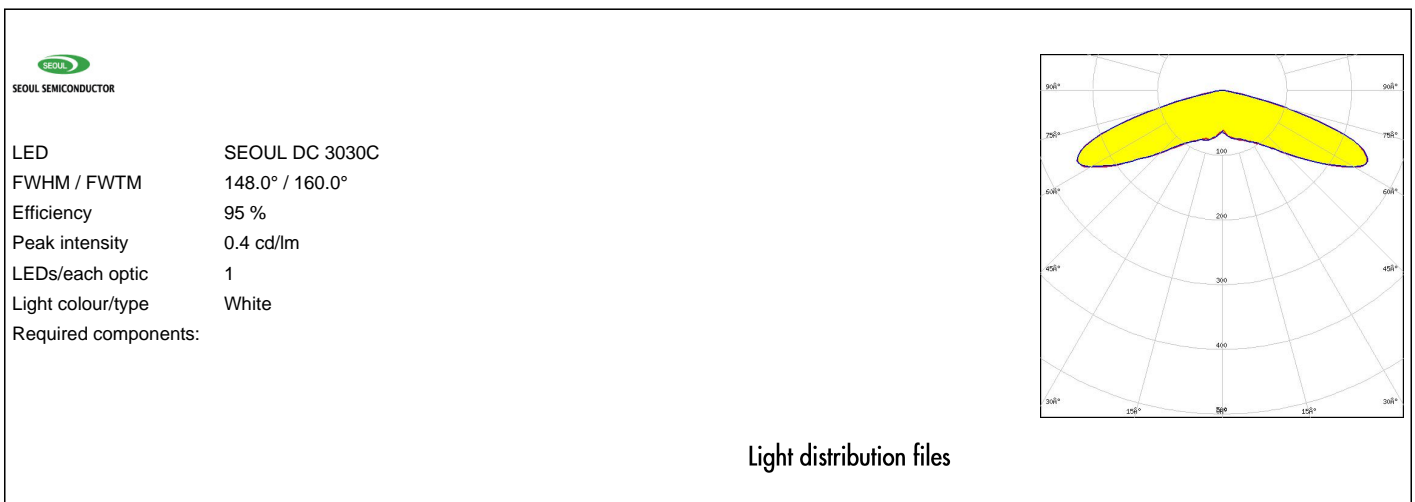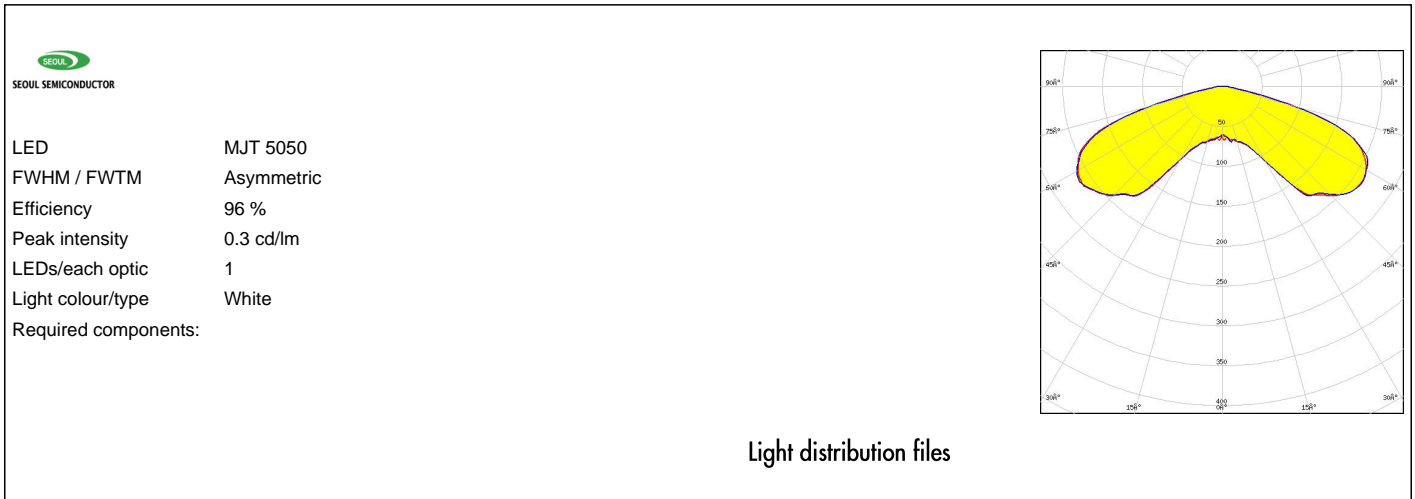




#### OPTICAL RESULTS (SIMULATED):

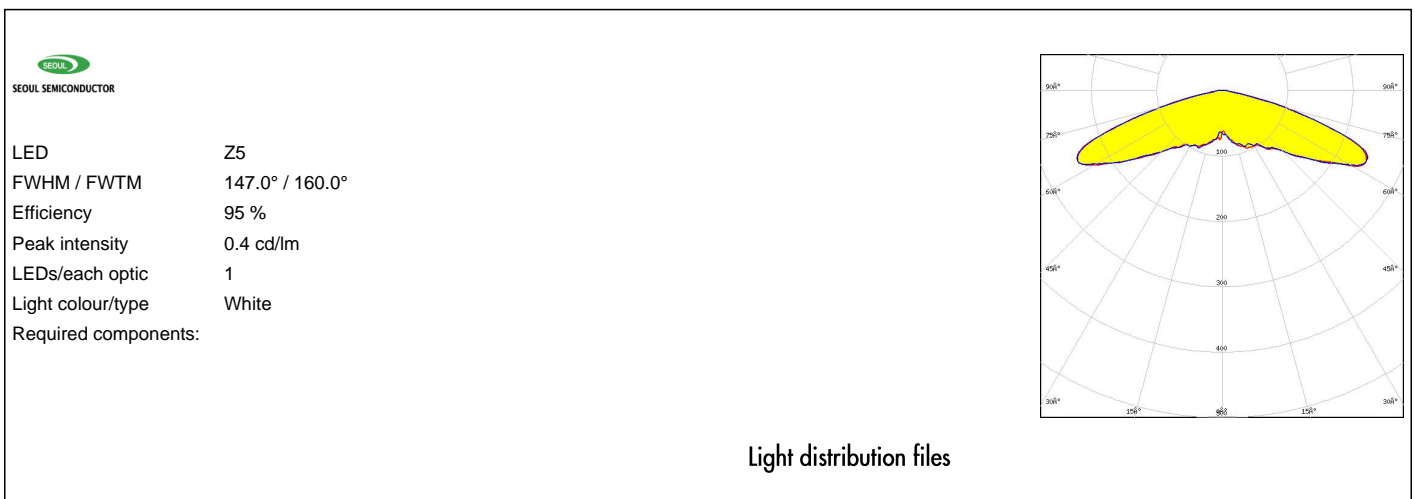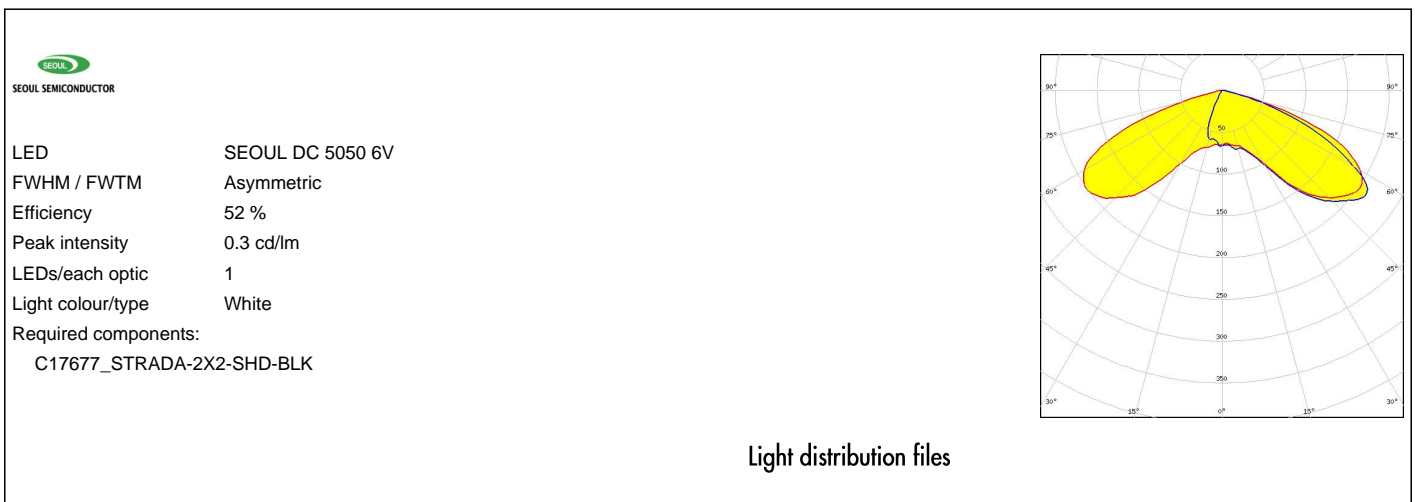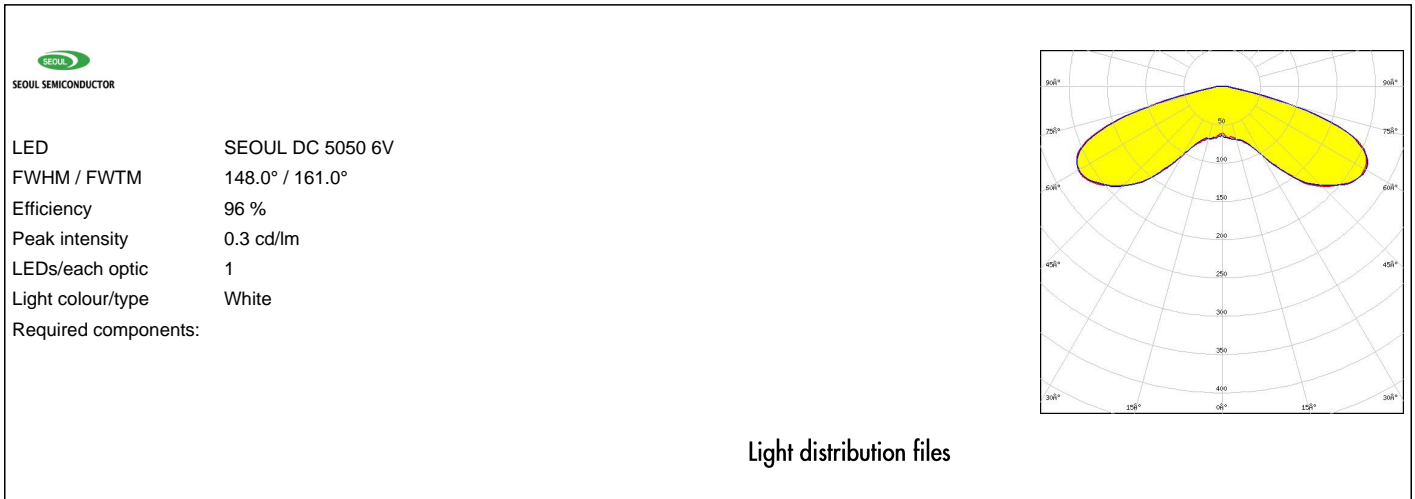


#### OPTICAL RESULTS (SIMULATED):

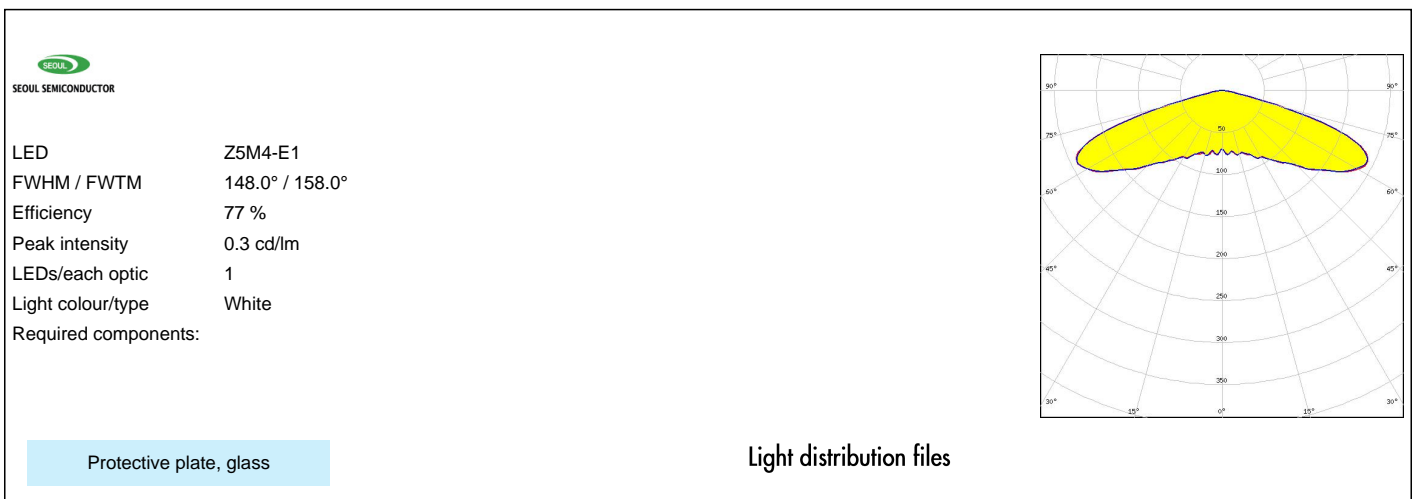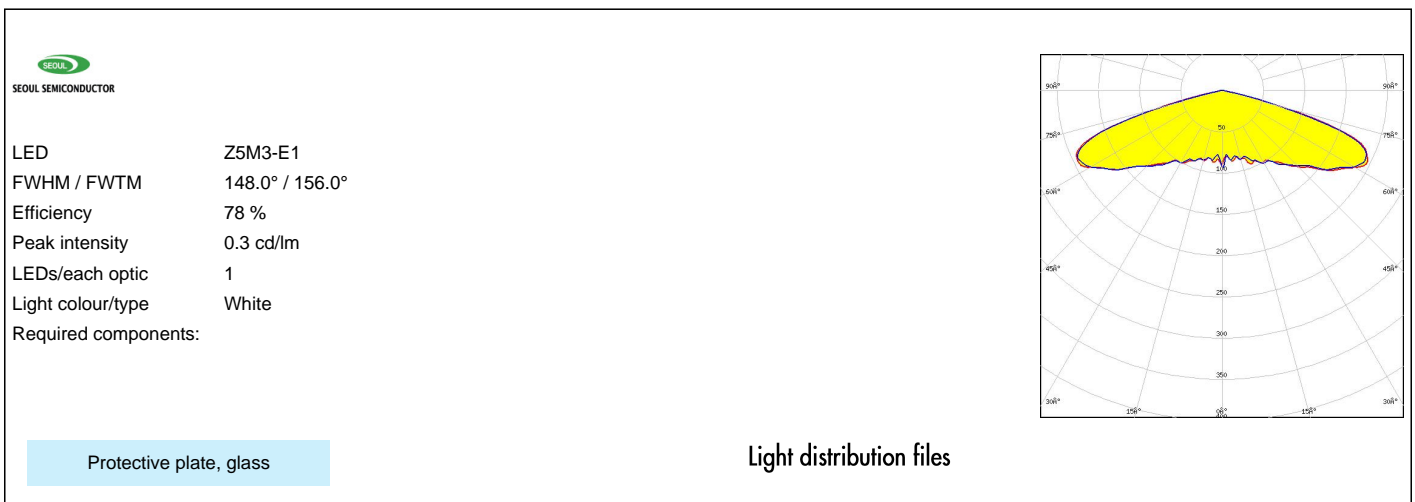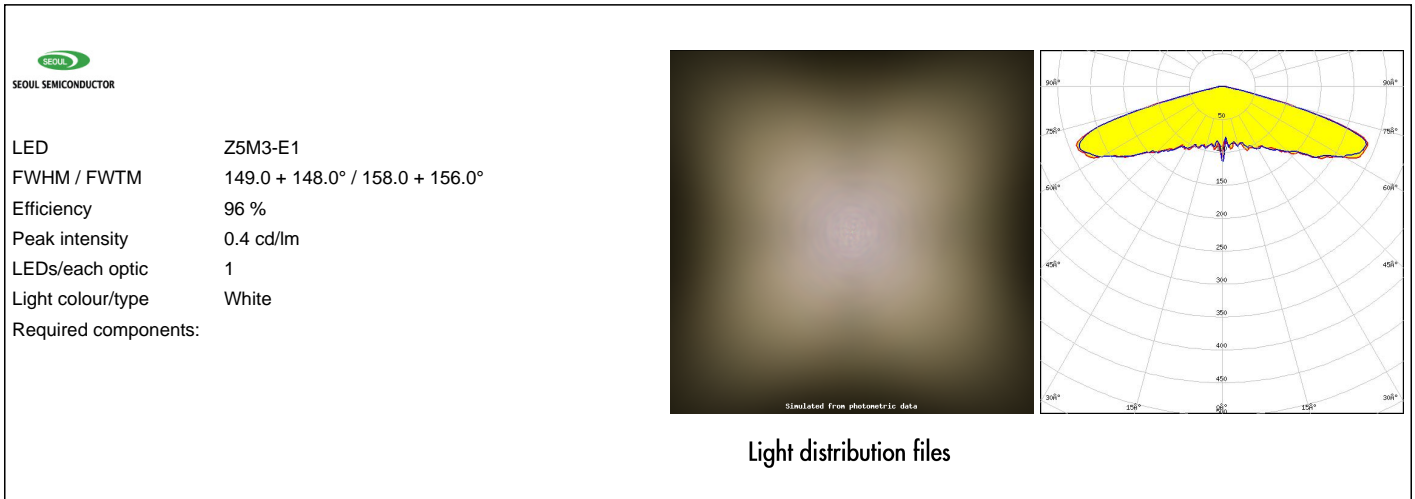


#### OPTICAL RESULTS (SIMULATED):

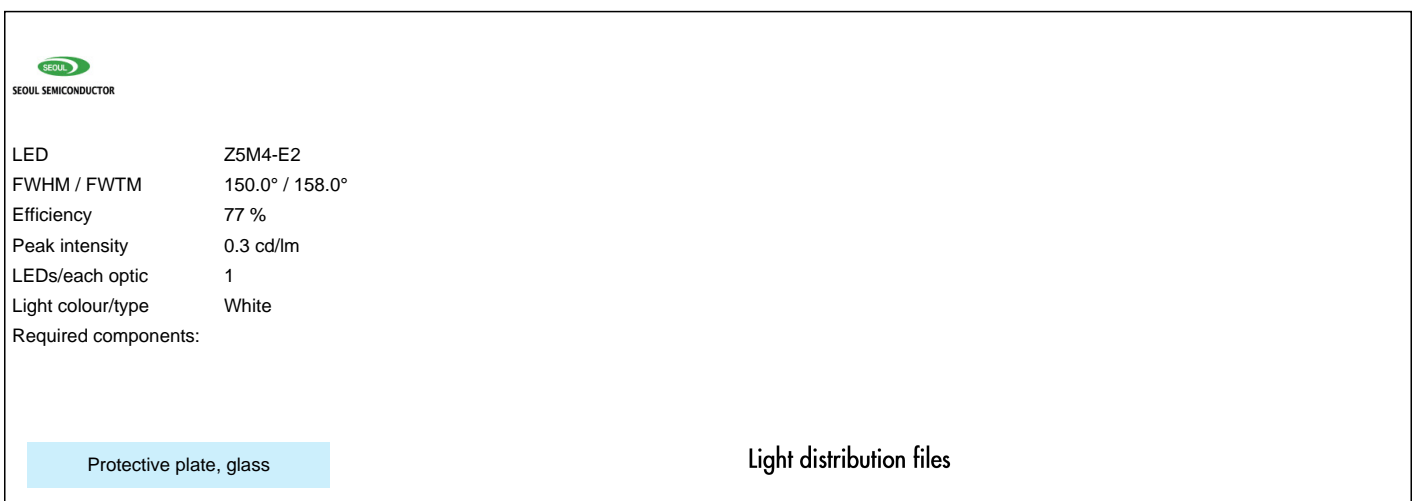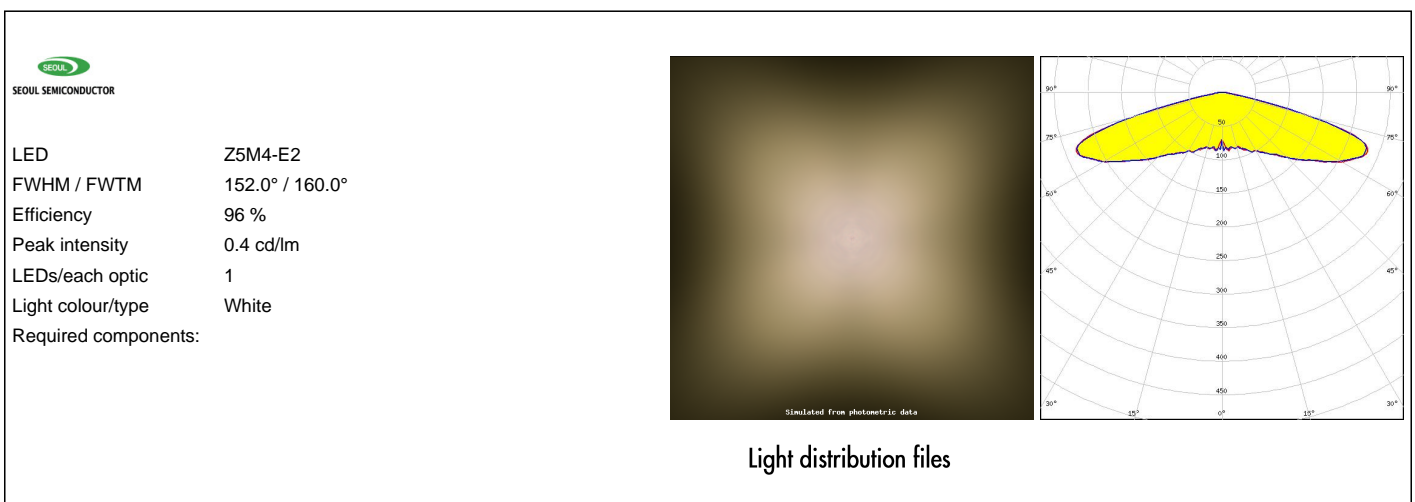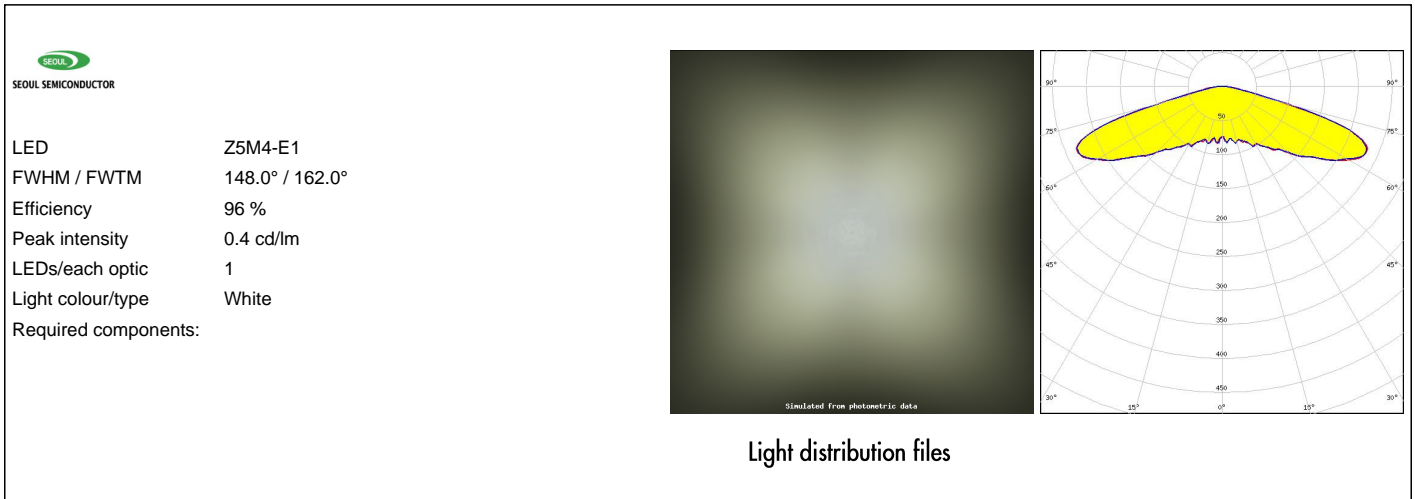


#### OPTICAL RESULTS (SIMULATED):

  
SEOL SEMICONDUCTOR

LED	Z5M5
FWHM / FWTM	146.0° / 158.0 + 156.0°
Efficiency	96 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

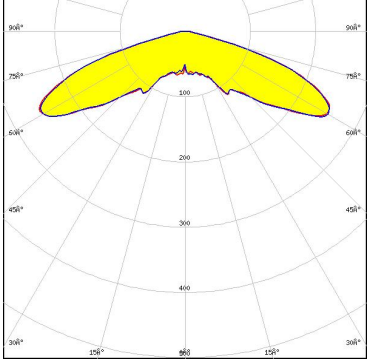


Light distribution files

  
SEOL SEMICONDUCTOR

LED	Z5M5
FWHM / FWTM	144.0° / 156.0°
Efficiency	78 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

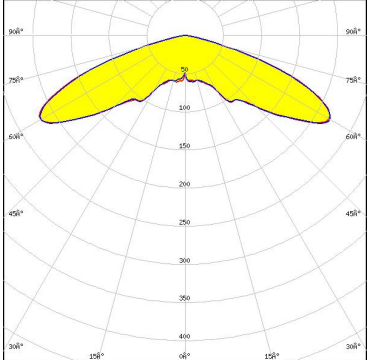

Light distribution files

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 7  
FI-24100 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)