

STRADELLA-8-HV-CY

Beam for canopy lighting with batwing light distribution. Suitable for symmetrical tunnel lighting. Variant with improved creepage distance for high voltage circuit designs.



SPECIFICATION:


Dimensions	49.5 x 49.5
Height	4.9 mm
Fastening	screw
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADELLA-8-HV-CY	Multi-lens	PMMA	clear		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15920_STRADELLA-8-HV-CY » Box size: 480 x 280 x 300 mm	800	160	160	4.8

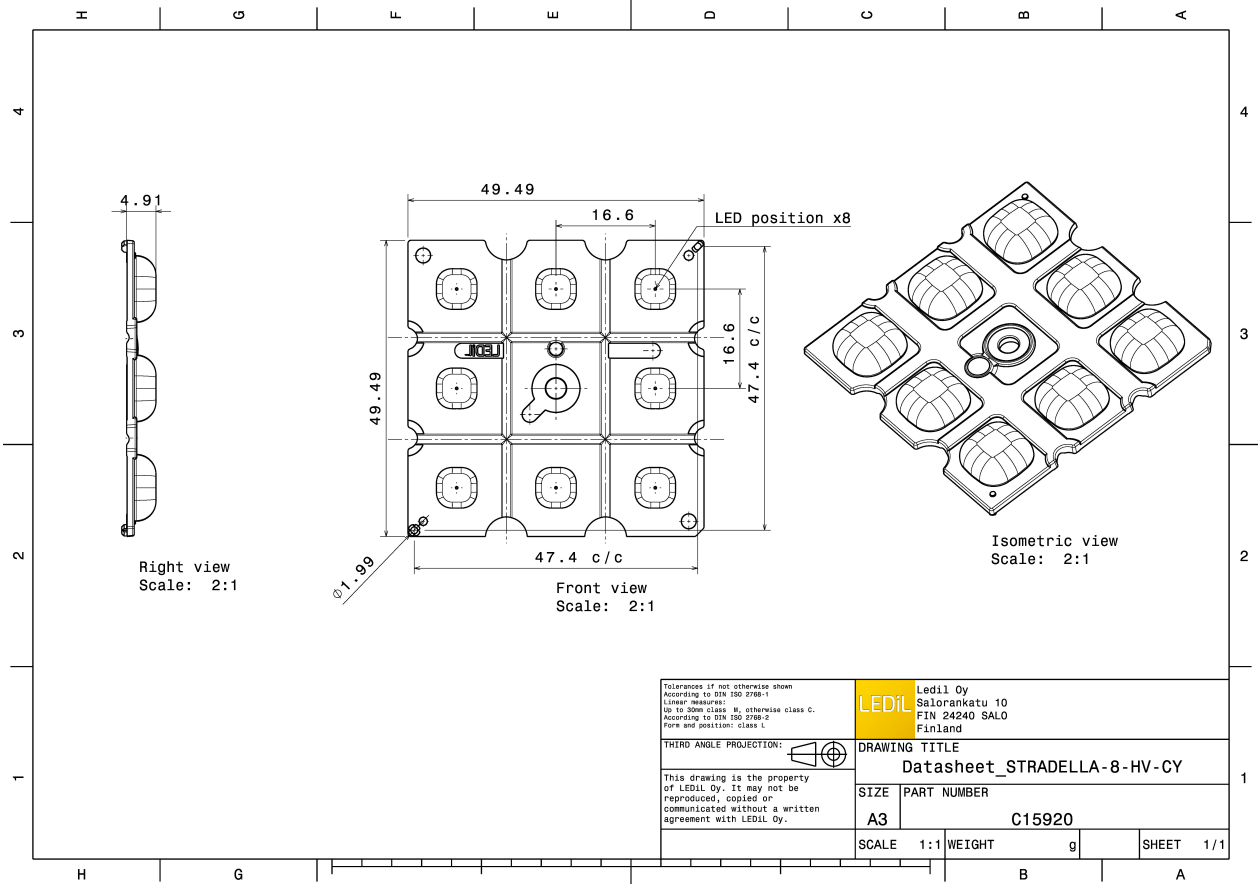


<small>Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L</small>		LEDiL Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
<small>THIRD ANGLE PROJECTION:</small> 		DRAWING TITLE Datasheet_STRADELLA-8-HV-CY	
<small>This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.</small>		SIZE A3	PART NUMBER C15920
SCALE 1:1		WEIGHT g	SHEET 1/1

See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED J Series 3030
 FWHM / FWTM 121.0° / 136.0°
 Efficiency 98 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

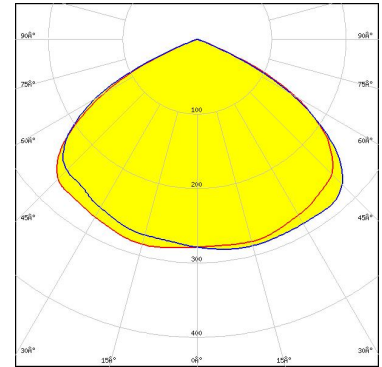

Light distribution files




LED XD16
 FWHM / FWTM 129.0° / 142.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

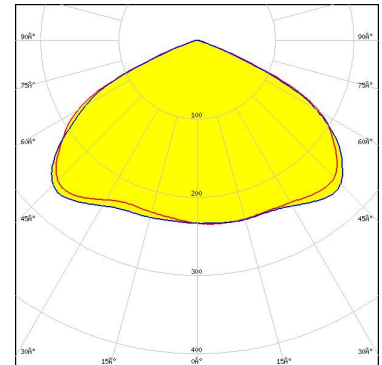

Light distribution files



LED XT-E
 FWHM / FWTM 125.0 + 126.0° / 146.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

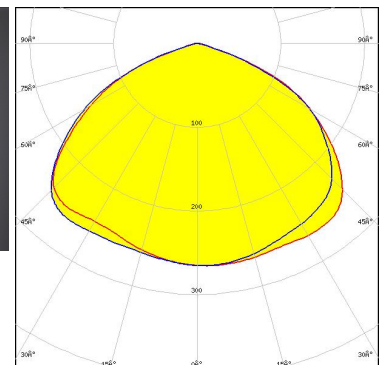


Light distribution files

OPTICAL RESULTS (MEASURED):

inventronics


LED PL-BRICK HP 3x8 Stradella-8
FWHM / FWTM 116.0° / 135.0°
Efficiency 98 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

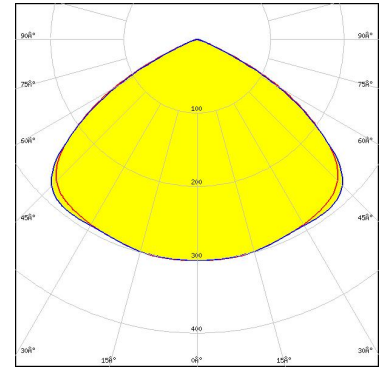

Light distribution files

LUMILEDS


LED LUXEON 3030 2D (Round LES)
FWHM / FWTM 120.0° / 135.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

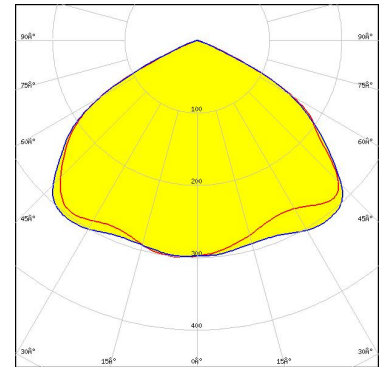

Light distribution files

LUMILEDS

LED LUXEON V2
FWHM / FWTM 124.0° / 140.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

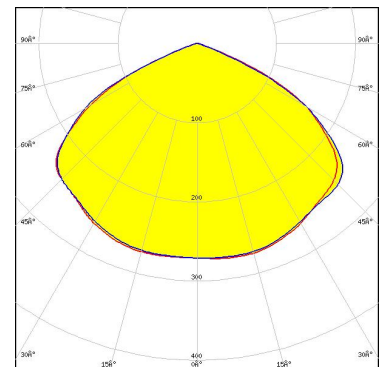


Light distribution files

OPTICAL RESULTS (MEASURED):




LED SST-10-B130
FWHM / FWTM 126.0° / 144.0°
Efficiency 97 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type Deep Red
Required components:

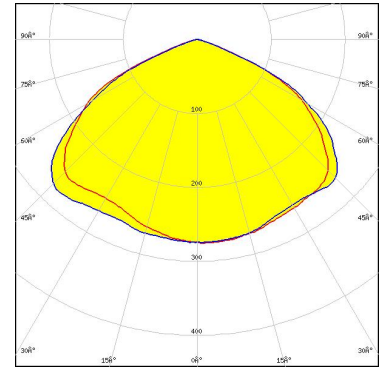

Light distribution files




LED NF2W585AR
FWHM / FWTM 130.0° / 143.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

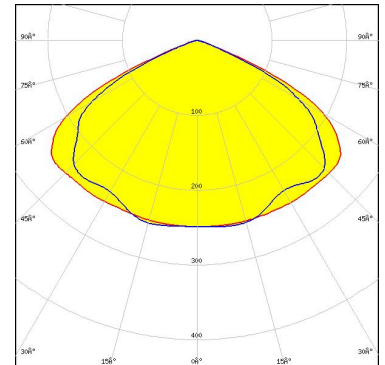

Light distribution files



LED NVSW219D
FWHM / FWTM 116.0° / 140.0 + 139.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

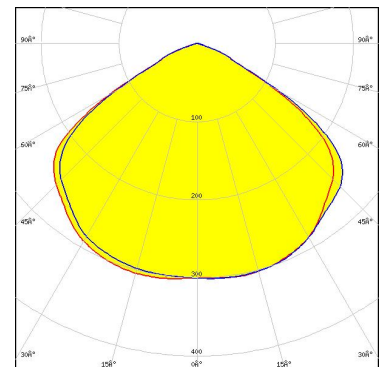


Light distribution files

OPTICAL RESULTS (MEASURED):




LED NVSW319B
FWHM / FWTM 122.0° / 136.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

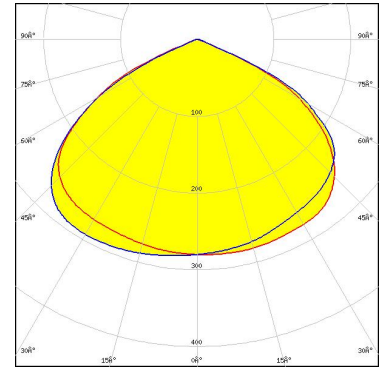

Light distribution files




LED OSCONIQ S 3030 (QSLR31)
FWHM / FWTM 121.0° / 136.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

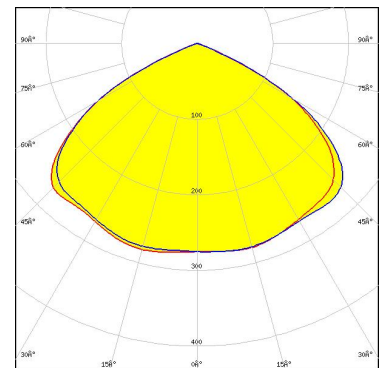

Light distribution files




LED Fortimo FastFlex LED 4x8up PR G5
FWHM / FWTM 120.0° / 134.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

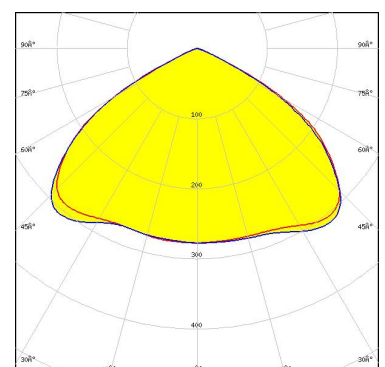

Light distribution files


OPTICAL RESULTS (MEASURED):

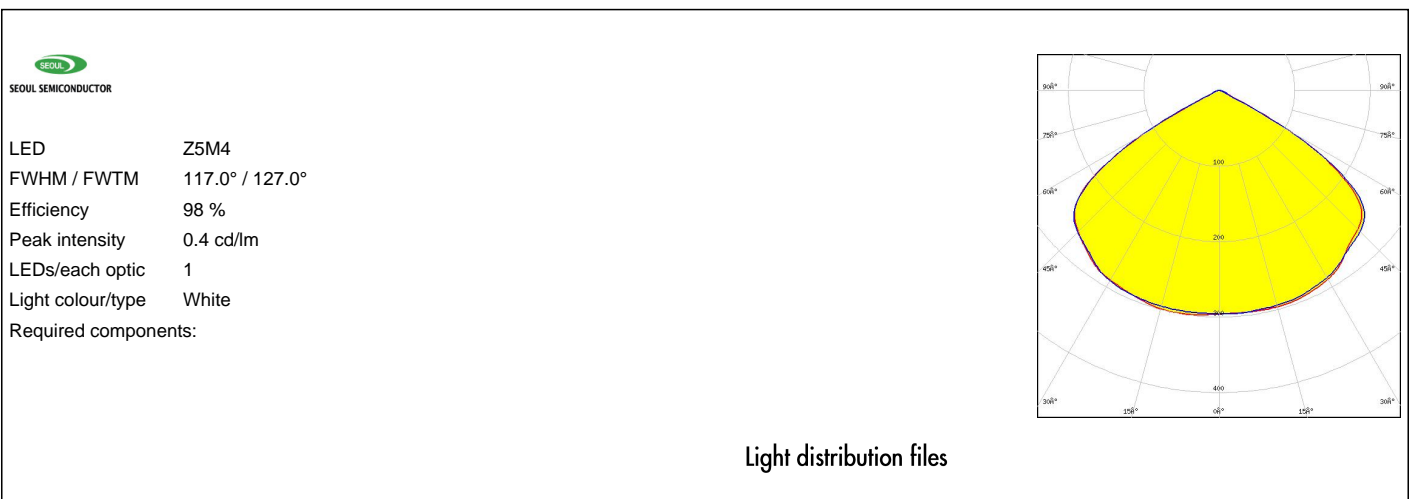

OPTICAL RESULTS (SIMULATED):



LED XP-G4
FWHM / FWTM 114.0° / 122.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

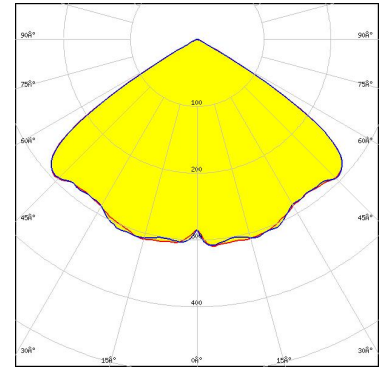


Light distribution files



LED XP-G4
FWHM / FWTM 114.0° / 124.0°
Efficiency 87 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Protective plate, glass

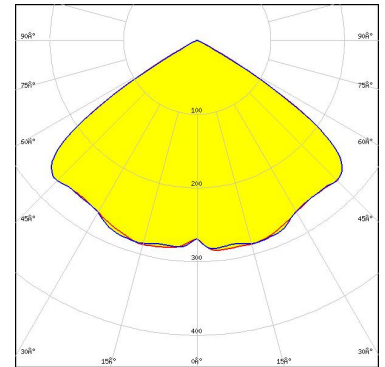

Light distribution files



LED XP-G4 HI
FWHM / FWTM 124.0° / 140.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

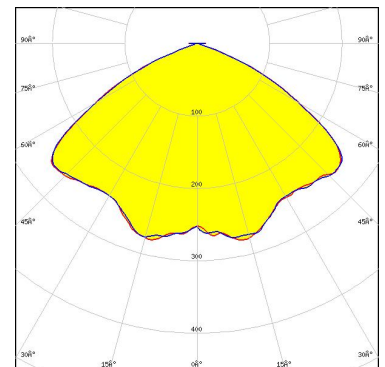


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON 5050 Square LES
FWHM / FWTM 114.0° / 136.0°
Efficiency 96 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

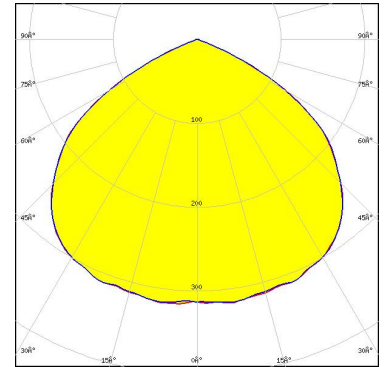

Light distribution files




LED LUXEON CZ
FWHM / FWTM 120.0° / 138.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type Blue
Required components:

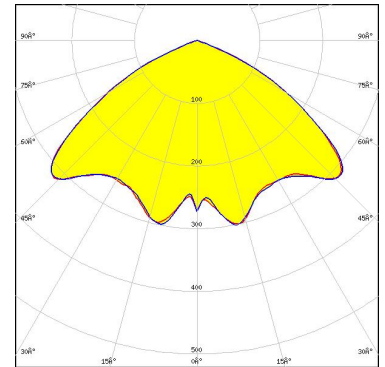

Light distribution files



LED LUXEON CZ
FWHM / FWTM 123.0° / 140.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

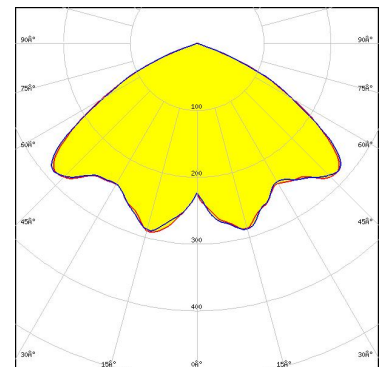

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED	SST-20 Gen2
FWHM / FWTM	122.0° / 138.0°
Efficiency	87 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

Light distribution files



LED	SST-20 Gen2
FWHM / FWTM	124.0° / 138.0°
Efficiency	96 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

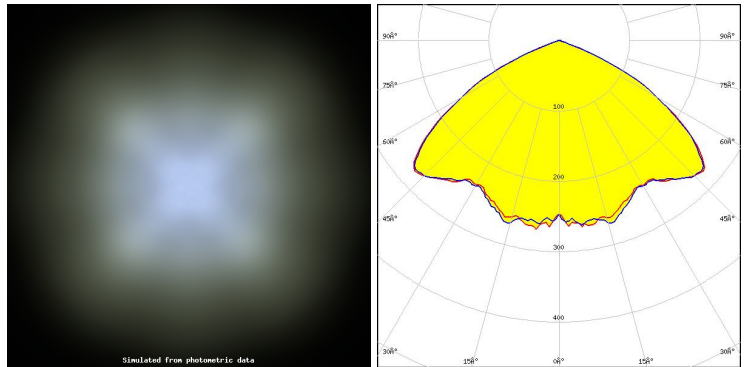


Light distribution files



LED	NVSW519A
FWHM / FWTM	122.0° / 136.0°
Efficiency	89 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass


Light distribution files

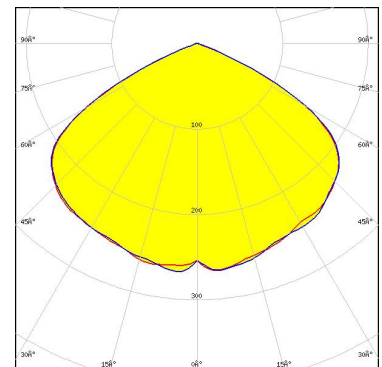

OPTICAL RESULTS (SIMULATED):




LED NVSW519A
FWHM / FWTM 123.0° / 136.0°
Efficiency 92 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

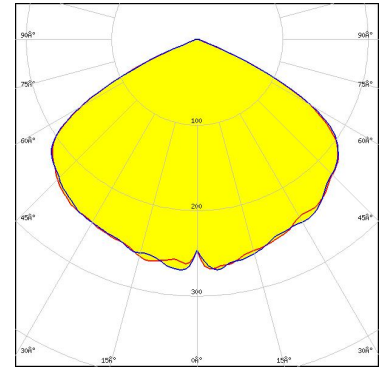

Light distribution files




LED NVSxE21A
FWHM / FWTM 120.0° / 133.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

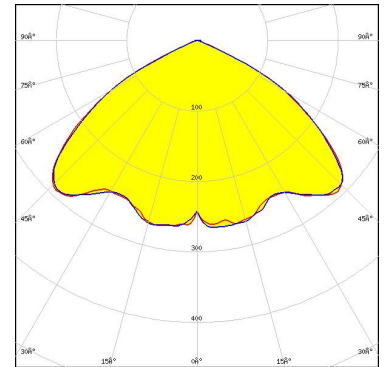

Light distribution files



LED OSCONIQ C 2424
FWHM / FWTM 120.0° / 136.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

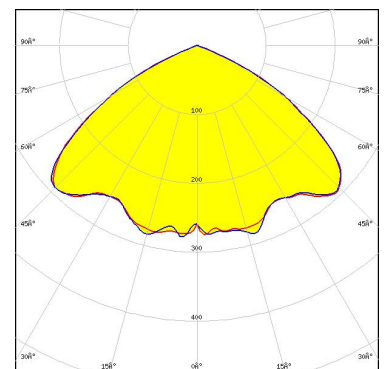

Light distribution files


OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED OSCONIQ C 3030
FWHM / FWTM 116.0° / 134.0°
Efficiency 87 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Protective plate, glass


Light distribution files

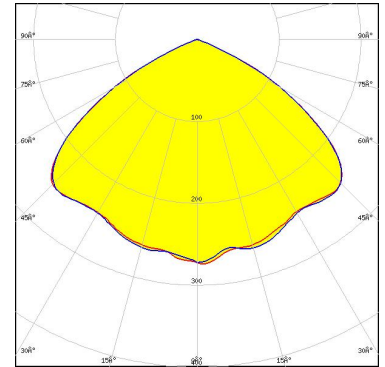

OSRAM
Opto Semiconductors

LED OSCONIQ C 3030
FWHM / FWTM 118.0° / 135.0 + 136.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Light distribution files

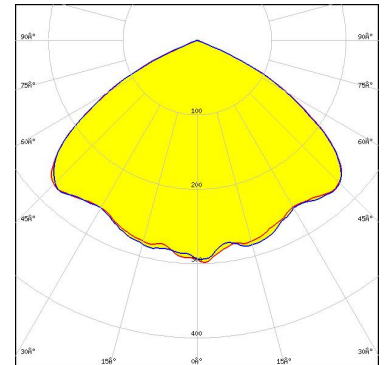

OSRAM
Opto Semiconductors

LED OSOLON Pure 1414
FWHM / FWTM 121.0 + 120.0° / 136.0°
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Light distribution files

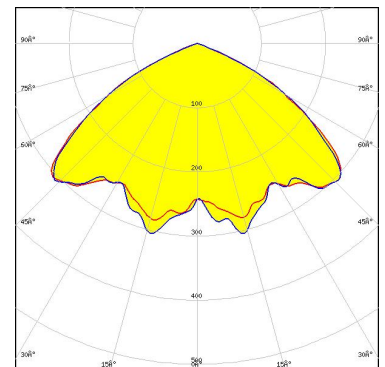

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED SFH 4715AS
FWHM / FWTM 93.0° / 124.0°
Efficiency 96 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type IR
Required components:

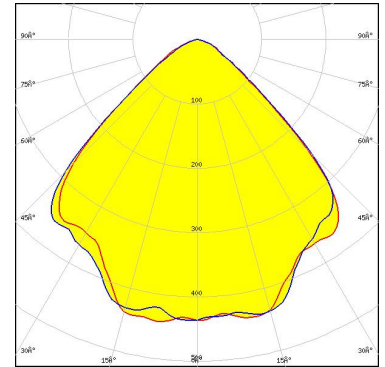

Light distribution files

SAMSUNG


LED LH181A
FWHM / FWTM 130.0° / 138.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

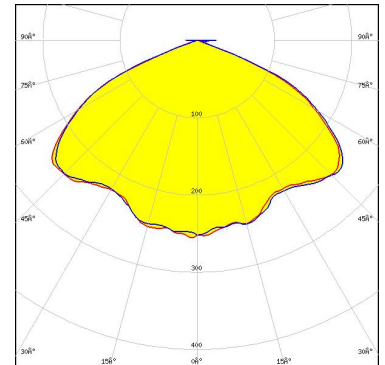

Light distribution files

SAMSUNG

LED LH181B
FWHM / FWTM 128.0° / 132.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

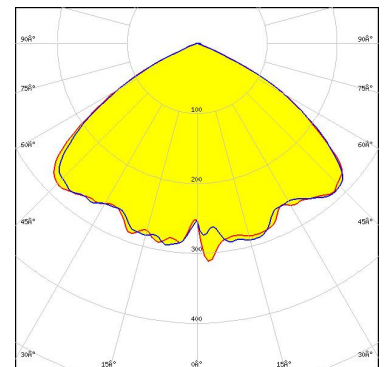

Light distribution files


OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LH351C
FWHM / FWTM 118.0° / 130.0°
Efficiency 85 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Protective plate, glass


Light distribution files

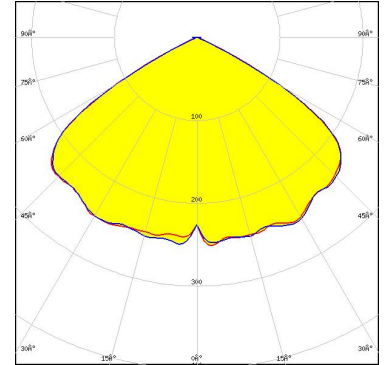

SAMSUNG


LED LH351D
FWHM / FWTM 120.0° / 134.0°
Efficiency 91 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Light distribution files



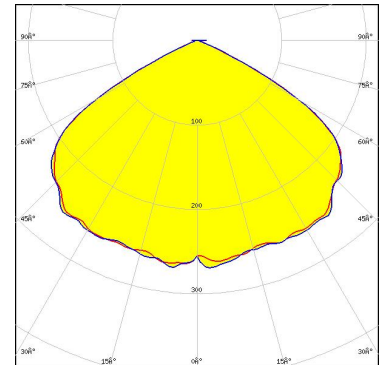


LED SEOUL DC 5050 6V
FWHM / FWTM 113.0° / 136.0°
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Light distribution files

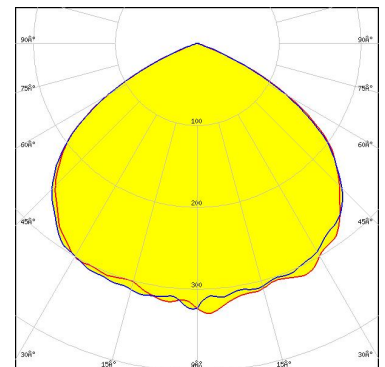

OPTICAL RESULTS (SIMULATED):

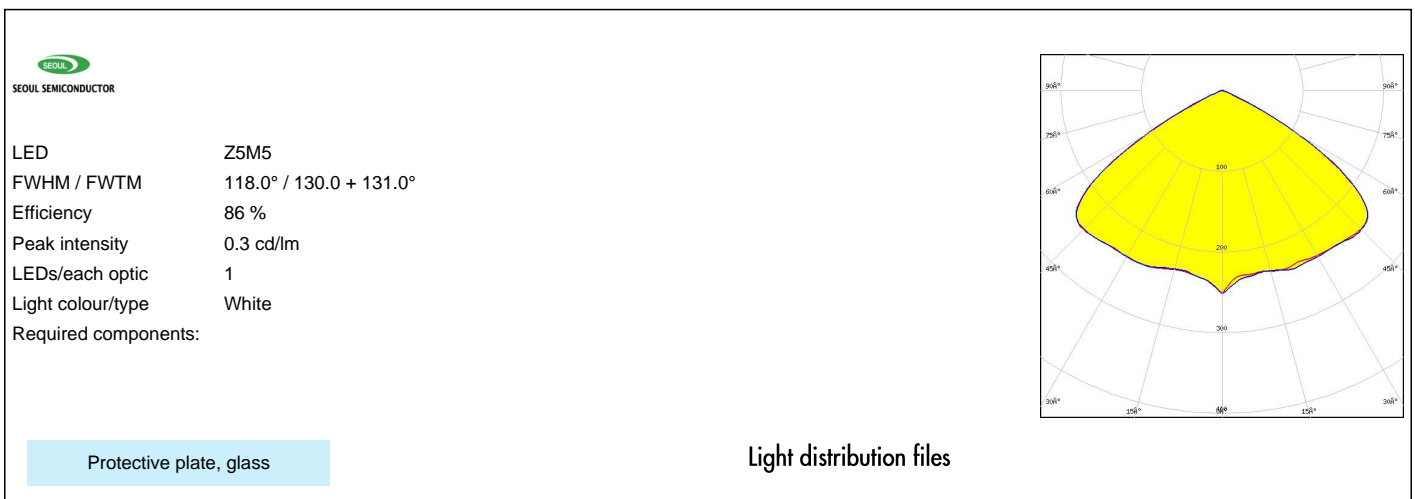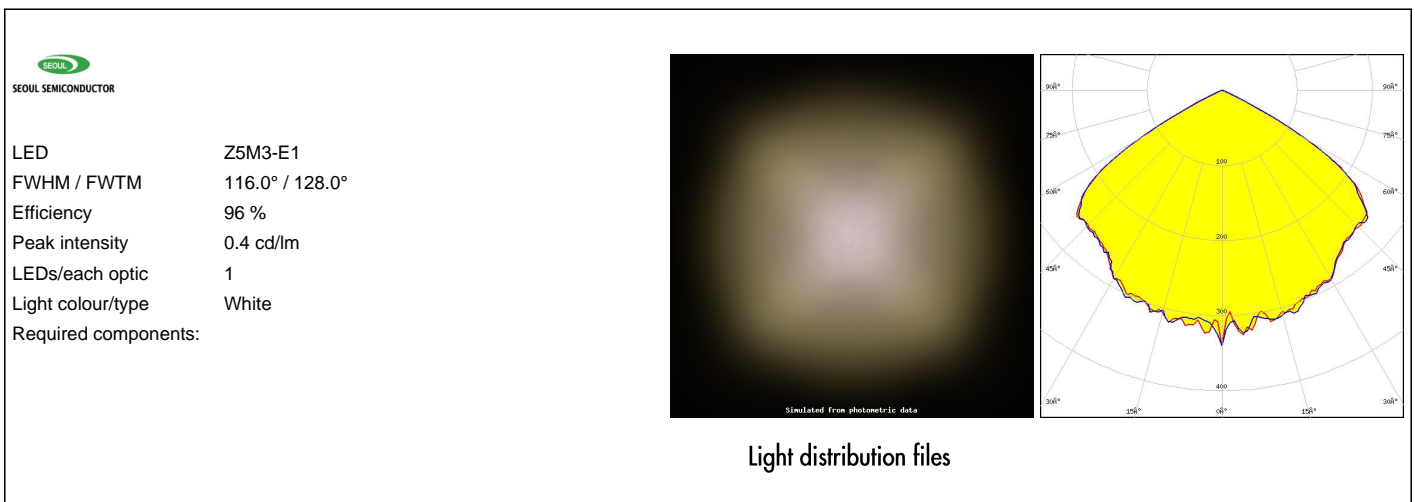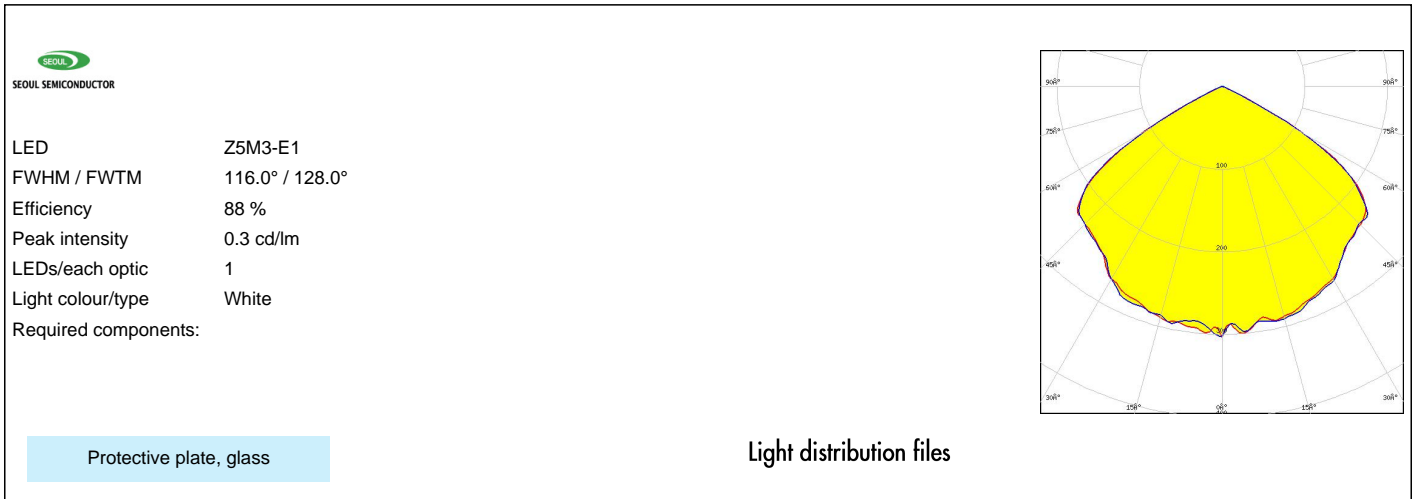

OPTICAL RESULTS (SIMULATED):

 SEUL SEMICONDUCTOR	
LED	Z5M5
FWHM / FWTM	118.0° / 130.0°
Efficiency	96 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)