

LZ53-SERIES FOR SEOUL Z5 LEDs



- Special care taken to make a uniform white or warm white illumination.
- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F). Allows use of high current and temperature conditions.
- Best available optical efficiency, more than 90%, with an extremely good cutoff of light.
- Fastening to heat sink with a PU foam **adhesive tape** of automotive grade.
- We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the tape.
- Please check fastening details from this link:
http://www.ledil.com/datasheets/DataSheet_TAPE.pdf

LENS TYPES

NAME	ORDERING CODE	FWHM Angle
LZ53 REAL SPOT	CA11631_LZ53-RS	To be measured shortly
LZ53 DIFFUSER	CA11632_LZ53-D	To be measured shortly
LZ53 MEDIUM	CA11633_LZ53-M	To be measured shortly
LZ53 OVAL	CA11634_LZ53-O-90	To be measured shortly

EULUMDAT & IES FILES AVAILABLE BY REQUEST


© Ledil Oy – PRELIMINARY - Subject to change without prior notice

MEASUREMENT DATA

COMING SOON



DRAWINGS

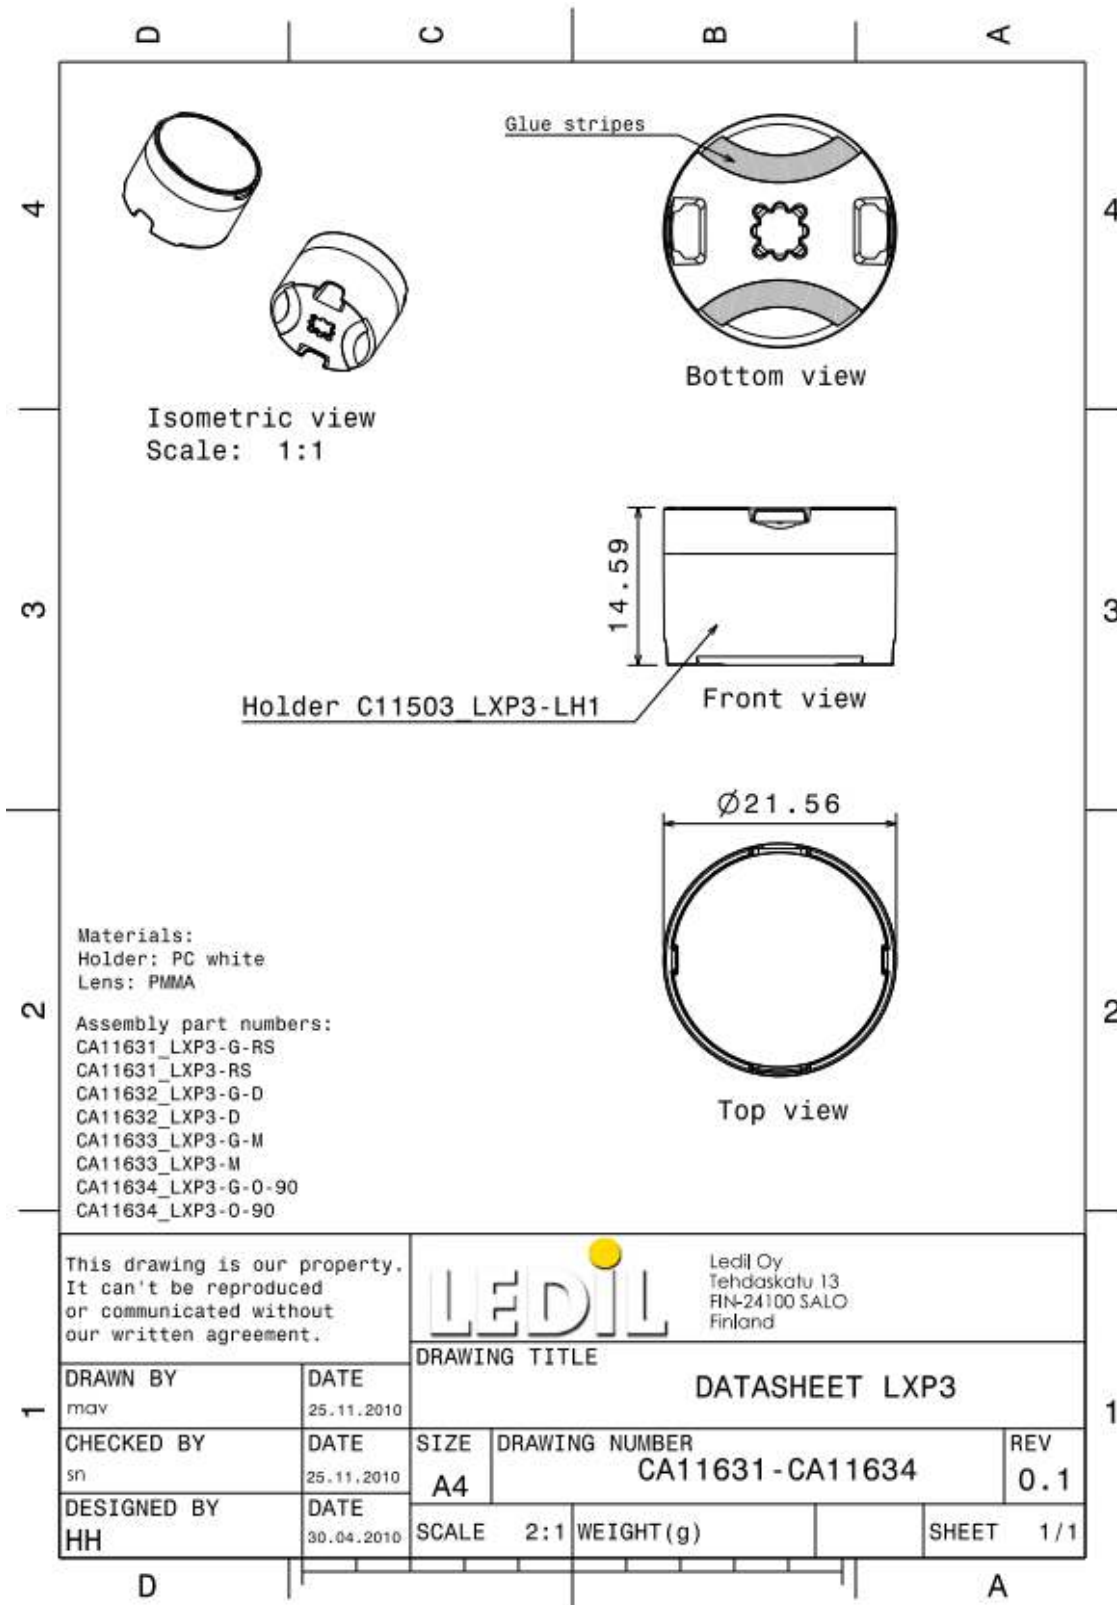

© Ledil Oy - PRELIMINARY - Subject to change without prior notice