

AMY-70-O

~25 + 60° oval beam

SPECIFICATION:

Dimensions	Ø 69.9
Height	13 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
AMY-70-O	Single lens	PMMA	clear		
AMY-70-HLD2-C-ASYM	Holder C	PC	black		
AMY-70-HLD2-B-ASYM	Holder B	PC	black		
AMY-70-HLD2-C-WHT-ASYM	Holder C	PC	white		
AMY-70-HLD2-B-WHT-ASYM	Holder B	PC	white		
AMY-70-HLD2-B50-ASYM	Holder B	PC	black		
AMY-70-HLD2-B50-WHT-ASYM	Holder B	PC	white		






ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C18466_AMY-70-O	285	285	15	9.8
Assembly				
CP19655_AMY-70-O-B50-WHT	210	210	15	8.9
CP19647_AMY-70-O-B50	210	210	15	8.9
CP19120_AMY-70-O-B2-WHT	210	210	15	9.1
CP19111_AMY-70-O-C2-WHT	210	210	15	8.9
CP19104_AMY-70-O-B2	210	210	15	9.1
CP19044_AMY-70-O-C2	210	210	15	8.9

PRODUCT DATASHEET AMY-70-0

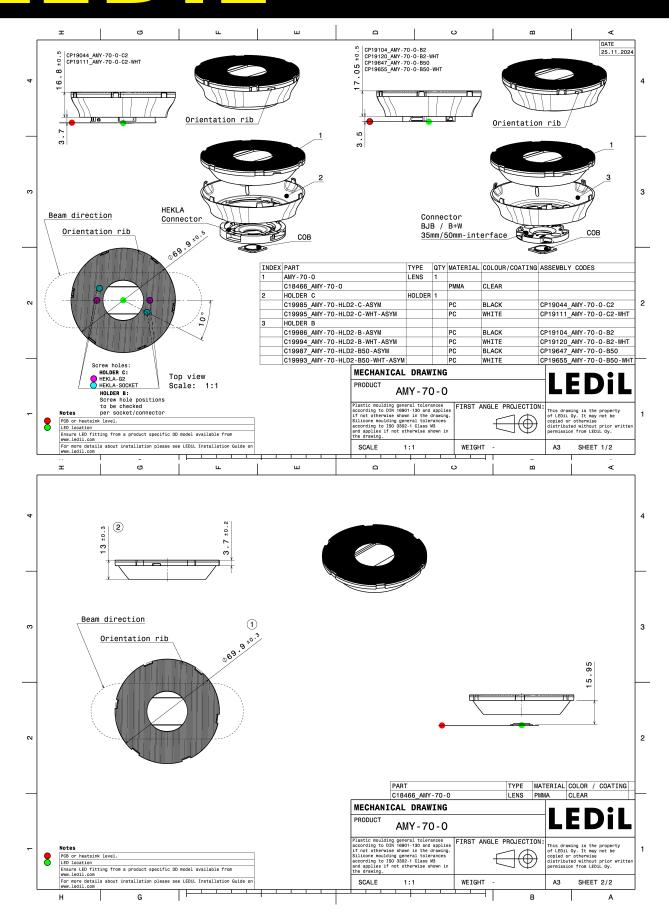

See also our general installation guide: www.ledil.com/installation_guide






LED V13 Gen 8-9

CP19044_AMY-70-O-C2 Ordering code FWHM / FWTM 60.0 + 23.0° / 96.0 + 53.0°

Efficiency 85 % LEDs/each optic Light colour/type White Required components: F15859_HEKLA-SOCKET-I

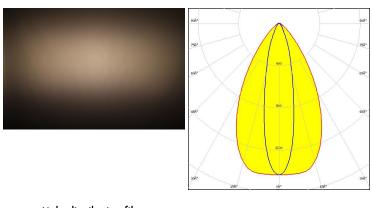


Light distribution files



V9 HD Gen7

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 15.0 + 62.0° / 38.0 + 93.0°

Efficiency 87 % LEDs/each optic Light colour/type White Required components: F15859_HEKLA-SOCKET-I

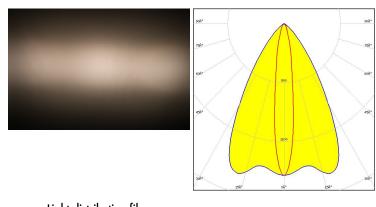


Light distribution files

CITIZEN

LED CLU03x

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 23.0 + 63.0° / 52.0 + 97.0°

Efficiency 86 % LEDs/each optic Light colour/type White Required components: F17438_HEKLA-G2-I

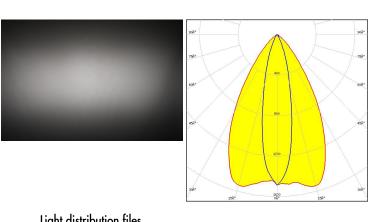

Light distribution files




CITIZEN

LED CLU712/713

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 64.0 + 15.0° / 94.0 + 38.0°

Efficiency 87 %
LEDs/each optic 1
Light colour/type White
Required components:
F17438_HEKLA-G2-I

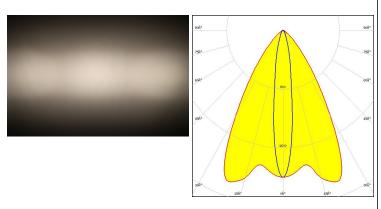


Light distribution files

CITIZEN

LED CLU720/721/723
Ordering code CP19044_AMY-70-O-C2
FWHM / FWTM 63.0 + 18.0° / 94.0 + 43.0°

Efficiency 83 %
LEDs/each optic 1
Light colour/type White
Required components:
F17438_HEKLA-G2-I

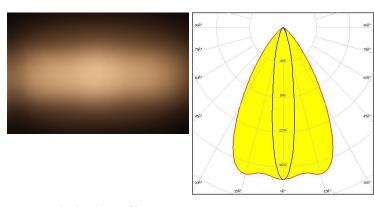


Light distribution files



LED CMA1825

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 65.0 + 20.0° / 97.0 + 47.0°

Efficiency 87 %
LEDs/each optic 1
Light colour/type White
Required components:
F15254_HEKLA-SOCKET-B

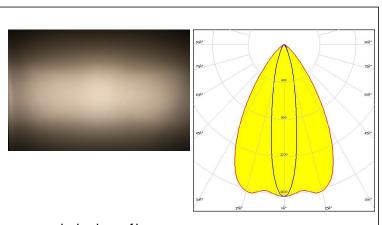

Light distribution files




CREE &

LED CMT19xx

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 63.0 + 23.0° / 97.0 + 52.0°

Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:
F17438_HEKLA-G2-I

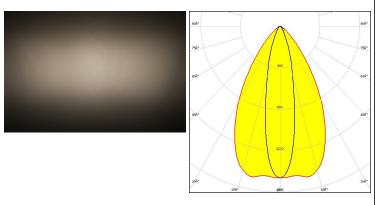


Light distribution files



LED LUXEON CoB 1204HD
Ordering code CP19044_AMY-70-O-C2
FWHM / FWTM 63.0 + 15.0° / 93.0 + 39.0°

Efficiency 85 %
LEDs/each optic 1
Light colour/type White
Required components:
F17437_HEKLA-G2-H

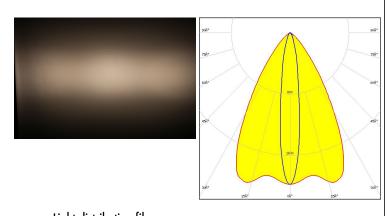

Light distribution files


MILEDS

 LED
 LUXEON CoB 1205HD

 Ordering code
 CP19044_AMY-70-O-C2

 FWHM / FWTM
 62.0 + 18.0° / 94.0 + 44.0°

Efficiency 85 %
LEDs/each optic 1
Light colour/type White
Required components:
F17437_HEKLA-G2-H

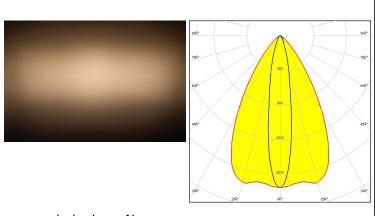

Light distribution files


6/25





LED CTM-14 (Tunable White) Gen2 Ordering code CP19044 AMY-70-O-C2 FWHM / FWTM 22.0 + 61.0° / 51.0 + 95.0°

Efficiency 85 % LEDs/each optic 1 White Light colour/type Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 442 Typ L8

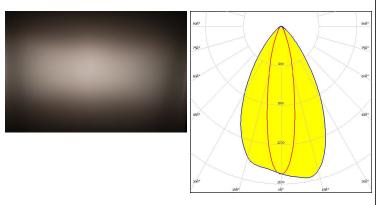

Light distribution files


PHILIPS

LED Fortimo SLM C TW L06A 1313 G7N

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 61.0 + 12.0° / 92.0 + 32.0°

Efficiency 89 % Peak intensity 2.9 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 508 Typ L8



Light distribution files


LED Fortimo SLM C TW L09A 1919 G7N

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 62.0 + 16.0° / 93.0 + 40.0°

Efficiency 88 % Peak intensity 2.2 cd/lm LEDs/each optic

Light colour/type Tunable White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

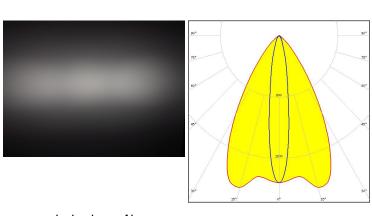

Light distribution files




SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 63.0 + 16.0° / 93.0 + 40.0°

Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:
F17435_HEKLA-G2-C

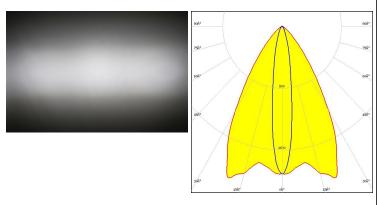


Light distribution files

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 62.0 + 24.0° / 98.0 + 54.0°

Efficiency 85 %
LEDs/each optic 1
Light colour/type White
Required components:
F17438_HEKLA-G2-I

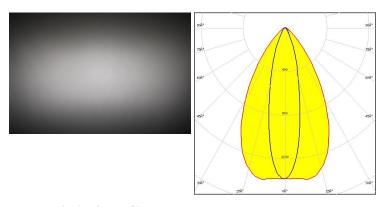

Light distribution files

8/25

bridgelux

LED V10 Gen 8-9

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 62.0 + 16.0° / 94.0 + 37.0°

Efficiency 88 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F15255_HEKLA-SOCKET-C 96² 96² 96² 96²

Light distribution files

bridgelux.

LED V10 Gen 8-9

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 16.0° / 91.0 + 37.0°

Efficiency 89 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

BJB: 47.360.1020

Light distribution files

367 369 358

bridgelux

LED V6 HD Gen 8

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 13.0 + 23.0° / 31.0 + 57.0°

Efficiency 91 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Bender Wirth: 634c Hekla

Light distribution files

9/25

bridgelux.


LED Vesta SE 13mm TW CP19044_AMY-70-O-C2 Ordering code FWHM / FWTM $62.0 + 20.0^{\circ} / 92.0 + 42.0^{\circ}$

Efficiency 84 % Peak intensity 1.7 cd/lm LEDs/each optic

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K




Light distribution files

CITIZEN

LED CLU02x (LES10) CP19044_AMY-70-O-C2 Ordering code FWHM / FWTM 62.0 + 16.0° / 92.0 + 36.0°

Efficiency 86 % Peak intensity 2.3 cd/lm LEDs/each optic 1 White Light colour/type

Required components: F17435_HEKLA-G2-C




Light distribution files

CITIZEN

CLU02x (LES10) Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 16.0° / 92.0 + 36.0°

Efficiency 89 % 2.3 cd/lm Peak intensity LEDs/each optic White Light colour/type Required components:

BJB: 47.360.1020




Light distribution files

CITIZEN

LED CLU02x (LES10) Ordering code C18466_AMY-70-O FWHM / FWTM $62.0 + 14.0^{\circ} / 90.0 + 35.0^{\circ}$

Efficiency 94 % Peak intensity 2.4 cd/lm LEDs/each optic Light colour/type White

Required components:



Light distribution files


CITIZEN

LED CLU03x

CP19044_AMY-70-O-C2 Ordering code FWHM / FWTM 64.0 + 23.0° / 96.0 + 50.0°

Efficiency 84 % Peak intensity 1.5 cd/lm LEDs/each optic 1 White Light colour/type

Required components: F17438_HEKLA-G2-I



Light distribution files


CITIZEN

CLU03x

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 22.0° / 94.0 + 48.0°

Efficiency 87 % Peak intensity 1.7 cd/lm LEDs/each optic White Light colour/type Required components:

BJB: 47.360.1010




CITIZEN

LED CLU03x

Ordering code C18466_AMY-70-O FWHM / FWTM 64.0 + 22.0° / 94.0 + 48.0°

Efficiency 93 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files

CREE ÷

LED CMU10xx

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 16.0° / 91.0 + 36.0°

Efficiency 89 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

Light distribution files

BJB: 47.360.1020


CREE -

LED CMU15xx

FWHM / FWTM 62.0 + 22.0° / 95.0 + 48.0°

Efficiency 93 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F17438_HEKLA-G2-I



Light distribution files

Last update: 16/04/2025

Subject to change without prior notice

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

UMILEDS


LED LUXEON CX Plus CoB L08 (Gen2)

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 62.0 + 22.0° / 94.0 + 47.0°

Efficiency 90 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

Light distribution files



UMILEDS


Bender Wirth: 637a Hekla

LED LUXEON CX Plus CoB - HD S02H6

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 13.0° / 93.0 + 30.0°

Efficiency 91 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files



LED LUXEON CX Plus CoB - HD S04H9

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 64.0 + 16.0° / 94.0 + 36.0°

Efficiency 91 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Bender Wirth: 634a Bayonet35L

DESCRIPTION


LED LUXEON CX Plus CoB L04 / L05 (Gen2)

Ordering code CP19129_AMY-50-O-C2 FWHM / FWTM 52.0 + 23.0° / 86.0 + 50.0°

Efficiency 87 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15254_HEKLA-SOCKET-B

SOCKET-B
Light distribution files






LED LUXEON CX Plus CoB M02 / M03 (Gen2)

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 62.0 + 16.0° / 93.0 + 35.0°

Efficiency 91 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15256_HEKLA-SOCKET-D



Light distribution files

MILEDS


LED LUXEON CX Plus CoB S01 (Gen2)

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 61.0 + 12.0° / 92.0 + 29.0°

Efficiency 92 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15956_HEKLA-SOCKET-J




Light distribution files



LED CHM-11 XH (19x19) Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM $62.0 + 14.0^{\circ} / 92.0 + 34.0^{\circ}$

Efficiency 92 % Peak intensity 2.6 cd/lm LEDs/each optic Light colour/type White

Required components: F15859_HEKLA-SOCKET-I



Light distribution files




LFD CTM-14 (Tunable White) Gen2 CP19044_AMY-70-O-C2 Ordering code FWHM / FWTM 64.0 + 22.0° / 94.0 + 46.0°

Efficiency 90 % Peak intensity 1.8 cd/lm LEDs/each optic

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files

Bender Wirth: 442 Typ L8




CTM-6 (Tunable White) Gen2 Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 60.0 + 12.0° / 90.0 + 30.0°

Efficiency 92 % 3 cd/lm Peak intensity LEDs/each optic

Tunable White Light colour/type

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files

Bender Wirth: 495 Typ L8




LED CTM-9 (Tunable White) Gen2 Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM $62.0 + 15.0^{\circ} / 90.0 + 34.0^{\circ}$

Efficiency 91 % Peak intensity 2.5 cd/lm LEDs/each optic

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files

Bender Wirth: 495 Typ L8



LED CXM-3

CP19104_AMY-70-O-B2 Ordering code FWHM / FWTM 59.0 + 10.0° / 92.0 + 24.0°

Efficiency 92 % Peak intensity 3.8 cd/lm LEDs/each optic 1 White Light colour/type

Required components:

Light distribution files

Bender Wirth: 634a Bayonet35L



CXM-4

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 60.0 + 11.0° / 92.0 + 26.0°

Efficiency 91 % 3.5 cd/lm Peak intensity LEDs/each optic White Light colour/type

Required components:

Light distribution files

Bender Wirth: 634a Bayonet35L



 LED
 CxM-6 (13.5x13.5)

 Ordering code
 CP19104_AMY-70-O-B2

 FWHM / FWTM
 60.0 + 12.0° / 90.0 + 26.0°

Efficiency 91 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

90²

90

Light distribution files

BJB: 47.360.1020

WNICHIA

LED COB J-Type

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 62.0 + 24.0° / 96.0 + 48.0°

Efficiency 90 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

90Å*

75Å*

60Å*

1200

1200

1200

1200

Light distribution files

Bender Wirth: 663a Hekla XL

WNICHIA

 LED
 COB L-Type (LES 11)


 Ordering code
 CP19044_AMY-70-O-C2

 FWHM / FWTM
 64.0 + 18.0° / 94.0 + 40.0°

Efficiency 91 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15858_HEKLA-SOCKET-H



WNICHIA


 LED
 COB S-Type (LES 6)

 Ordering code
 CP19104_AMY-70-O-B2

 FWHM / FWTM
 62.0 + 12.0° / 94.0 + 28.0°

Efficiency 91 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files

WNICHIA

 LED
 COB S-Type (LES 7)

 Ordering code
 CP19104_AMY-70-O-B2

 FWHM / FWTM
 62.0 + 13.0° / 94.0 + 30.0°

Efficiency 91 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

Light distribution files

l

Bender Wirth: 652a Bayonet35L


WNICHIA

LED COB T-Type

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 13.0° / 94.0 + 30.0°

Efficiency 91 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Bender Wirth: 652a Bayonet35L



WNICHIA

LED NJCWL024Z-V1MT: COB L-Type Tunable White


Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 60.0 + 12.0° / 88.0 + 30.0°

Efficiency 91 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files

Bender Wirth: 497 Typ L8 HV

WNICHIA

LED NJNWS012Z-V1MT: COB S-Type Tunable White


Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 58.0 + 10.0° / 88.0 + 26.0°

Efficiency 92 %
Peak intensity 3.7 cd/lm
LEDs/each optic 1

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files

Bender Wirth: 495 Typ L8 HV

WNICHIA

LED NVCWJ024Z-V1MT: COB J-Type Tunable White


Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 63.0 + 16.0° / 92.0 + 38.0°

Efficiency 91 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files

Bender Wirth: 498 Typ L8 HV

Last update: 16/04/2025 Subject to change without prior notice

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

oject to change without prior notice Published: 27/12/2023

19/25

PHILIPS

 LED
 Fortimo SLM L15 CoB


 Ordering code
 CP19044_AMY-70-O-C2

 FWHM / FWTM
 63.0 + 23.0° / 95.0 + 48.0°

Efficiency 84 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

Bender Wirth: 632a Hekla XL



Light distribution files

SAMSUNG


LED LC010C G2

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 60.0 + 12.0° / 90.0 + 26.0°

Efficiency 91 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

BJB: 47.360.1020



Light distribution files

SAMSUNG

LED LC010T (Tunable White)
Ordering code CP19044_AMY-70-O-C2
FWHM / FWTM 62.0 + 14.0° / 90.0 + 32.0°

Efficiency 92 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K

504°

504°

504°

504°

504°

504°

504°

504°

504°

504°

504°

504°

504°

504°

Light distribution files

Bender Wirth: 501 Typ L8



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 24.0° / 94.0 + 50.0°

Efficiency 86 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

508*

508*

508*

608*

608*

608*

1200

1200

308*

128*

308*

Light distribution files

BJB: 47.360.1010


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

Ordering code C18466_AMY-70-O FWHM / FWTM 62.0 + 22.0° / 94.0 + 50.0°

Efficiency 93 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 64.0 + 24.0° / 96.0 + 53.0°

Efficiency 84 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15859_HEKLA-SOCKET-I

SAMSUNG

LED LC020C G2

Ordering code CP19104_AMY-70-O-B2 FWHM / FWTM 62.0 + 14.0° / 91.0 + 34.0°

Efficiency 90 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

798* 798* 988* 988* 988* 988* 988*

Light distribution files

BJB: 47.360.1010

SAMSUNG

 LED
 LC020T (Tunable white)

 Ordering code
 CP19044_AMY-70-O-C2


 FWHM / FWTM
 62.0 + 18.0° / 92.0 + 40.0°

Efficiency 91 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1

Light colour/type Tunable White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files

Bender Wirth: 501 Typ L8

SAMSUNG

LED LC030C/040C G2
Ordering code CP19104_AMY-70-O-B2
FWHM / FWTM 63.0 + 19.0° / 94.0 + 40.0°

Efficiency 89 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

Light distribution files

BJB: 47.360.1010






 LED
 MJT COB LES 14.5

 Ordering code
 CP19044_AMY-70-O-C2

 FWHM / FWTM
 60.0 + 22.0° / 93.0 + 48.0°

Efficiency 89 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15859_HEKLA-SOCKET-I



Light distribution files



 LED
 MJT COB LES 6


 Ordering code
 CP19044_AMY-70-O-C2

 FWHM / FWTM
 62.0 + 16.0° / 93.0 + 36.0°

Efficiency 92 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files



LED MJT COB LES 6


Ordering code CP19044_AMY-70-O-C2

FWHM / FWTM 60.0 + 12.0° / 91.0 + 28.0°

Efficiency 92 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

C16142_HEKLA-SOCKET-K



Light distribution files




XICATO

LED XOB 14.5 mm

Ordering code CP19044_AMY-70-O-C2 FWHM / FWTM 61.0 + 21.0° / 92.0 + 42.0°

Efficiency 80 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F17438_HEKLA-G2-I



Light distribution files



PRODUCT DATASHEET AMY-70-0

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 7 FI-24100 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

25/25

www.ledil.com/ where_to_buy