# **PRODUCT** C18336\_BRIANNA-14X1-WW

## **BRIANNA-14X1-WW**

~75° wide beam. Variant with 14X1 lens.

## **SPECIFICATION:**

**Dimensions** 560.0 x 36.0 Height 13.4 mm snaps, clips Fastening **ROHS** compliant yes 🕕



## **MATERIALS:**

**Type** Colour **Finish** Component Material Length (mm) **BRIANNA-14X1-WW** Linear lens **PMMA** clear


## **ORDERING INFORMATION:**

Component Qty in box MOQ MPQ Box weight (kg) 5.6

C18336\_BRIANNA-14X1-WW 40 80 40 » Box size: 595 x 260 x 205 mm



## PRODUCT DATASHEET C18336\_BRIANNA-14X1-WW

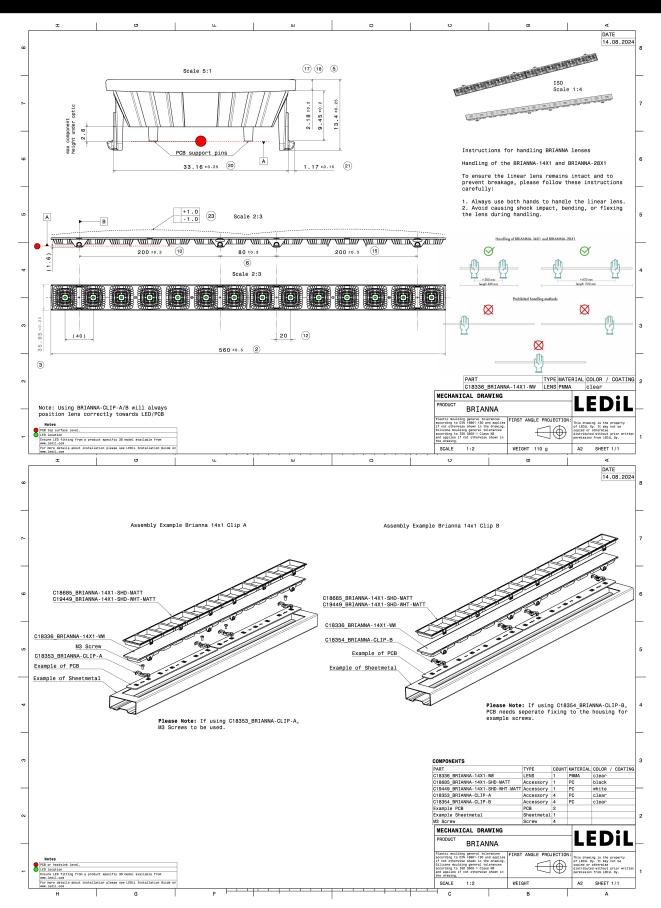

See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>

Published: 01/08/2024



## **OPTICAL RESULTS (MEASURED):**



LED Opticus Daisy M L28W2


 FWHM / FWTM
 75.0° / 112.0°

 Efficiency
 84 %

 Peak intensity
 0.6 cd/lm

LEDs/each optic 1
Light colour/type White
Required components:

C18497\_BRIANNA-7X1-SHD-MATT



Light distribution files

## PRODUCT DATASHEET C18336\_BRIANNA-14X1-WW

## **OPTICAL RESULTS (SIMULATED):**




LED LinLED 560x28mm 2200lm 840 4C 42V DAISY-7X1 G1

FWHM / FWTM 74.0° / 103.0°
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour/type White

Required components:

C18685\_BRIANNA-14X1-SHD-MATT



Light distribution files




LED LinLED 560x28mm 2200lm 840 4C 42V DAISY-7X1 G1

FWHM / FWTM 75.0° / 103.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour/type White

Required components:


C19449\_BRIANNA-14X1-SHD-WHT-MATT



Light distribution files

#### OSRAM Opto Semiconductors

LED Duris E 2835
FWHM / FWTM 69.0° / 99.0°
Efficiency 88 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour/type White
Required components:



Light distribution files



## **OPTICAL RESULTS (SIMULATED):**

## **SAMSUNG**


 LED
 LM28xB Series

 FWHM / FWTM
 72.0° / 104.0°

 Efficiency
 91 %

Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour/type White

Required components:



Light distribution files

## **SAMSUNG**

 LED
 LM28xB Series

 FWHM / FWTM
 72.0° / 103.0°


 Efficiency
 93 %

 Peak intensity
 0.7 cd/lm

LEDs/each optic 4
Light colour/type White

Required components:

C18497\_BRIANNA-7X1-SHD-MATT



Light distribution files



# PRODUCT DATASHEET C18336\_BRIANNA-14X1-WW

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 7 FI-24100 SALO Finland

#### **LEDIL Inc.**

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

## Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Poznan, Poland Hong Kong, China

#### **Distribution Partners**

6/6

www.ledil.com/ where\_to\_buy