

CARMEN-RS-C-WHT

~10° spot beam. Assembly with holder C compatible with LEDiL HEKLA. White version.

SPECIFICATION:

Dimensions	Ø 69.5 mm
Height	41.5 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIALS:


Component	Type	Material	Colour	Finish	Length
CARMEN-RS	Single lens	PMMA	clear		66.4
CARMEN-HI D-C-WHT	Holder	PC	white		69.5

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CP16940_CARMEN-RS-C-WHT	Single lens	150	150	15	8.8
» Box size: 480 x 280 x 300 mm					



PRODUCT CP16940_CARMEN-RS-C-WHT

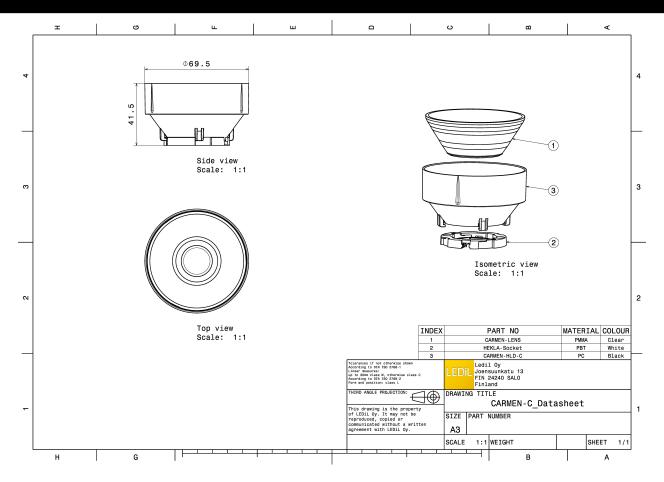

See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED Vesta TW 6mm DP

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 9.0° / 17.0° Efficiency 82 % Peak intensity 15.9 cd/lm

LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 504 Typ L8

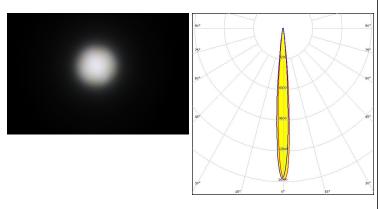


Light distribution files



Vesta TW 9mm (9W) DP

FWHM / FWTM 12.0° / 23.0° Efficiency 83 % Peak intensity 7.9 cd/lm LEDs/each optic Light colour/type White Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8

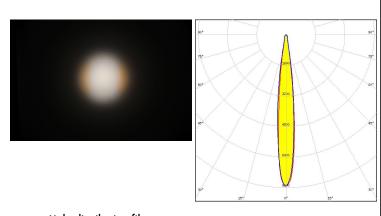


Light distribution files

CITIZEN

CLU700/701/702/703 LED

FWHM / FWTM 8.0° / 15.0° Efficiency 86 % Peak intensity 20.4 cd/lm LEDs/each optic Light colour/type White Required components: F15255_HEKLA-SOCKET-C

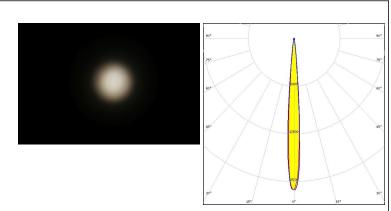


Light distribution files

OPTICAL RESULTS (MEASURED):

CITIZEN

LED CLU710/711 12.0° / 20.0° FWHM / FWTM Efficiency 83 % Peak intensity 10.3 cd/lm LEDs/each optic White Light colour/type Required components:

F15859_HEKLA-SOCKET-I

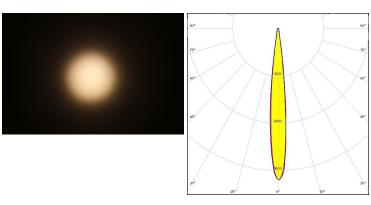


Light distribution files

CITIZEN

CLU7B2 FWHM / FWTM 6.0° / 11.0° Efficiency 87 % Peak intensity 38.6 cd/lm LEDs/each optic

Light colour/type White Required components:


F15255_HEKLA-SOCKET-C

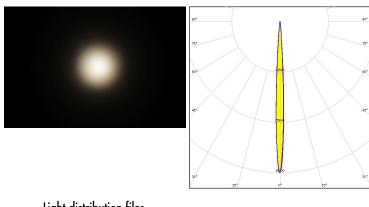


Light distribution files

CREE \$

LED CXA/B 15xx $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 12.0° / 20.0° Efficiency 85 % Peak intensity 10.8 cd/lm LEDs/each optic 1 Light colour/type White Required components: F15256_HEKLA-SOCKET-D






Light distribution files

OPTICAL RESULTS (MEASURED):

LUMILEDS

LUXEON CX Plus CoB L08 (Gen2)

FWHM / FWTM 18.0° / 31.0° Efficiency 84 % Peak intensity 4.5 cd/lm LEDs/each optic White Light colour/type Required components: Bender Wirth: 637a Hekla

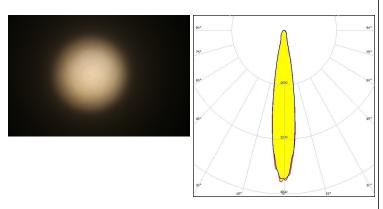


Light distribution files



LUXEON CX Plus CoB - HD S01H4

FWHM / FWTM 8.0° / 14.0° Efficiency 87 % Peak intensity 27.2 cd/lm LEDs/each optic

Light colour/type White Required components: Bender Wirth: 634c Lena

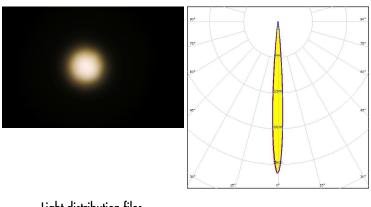


Light distribution files

LUMILEDS

LED LUXEON CX Plus CoB - HD S04H9

FWHM / FWTM 13.0° / 20.0° Efficiency 86 % Peak intensity 10.5 cd/lm LEDs/each optic Light colour/type White Required components:

Bender Wirth: 634c Hekla

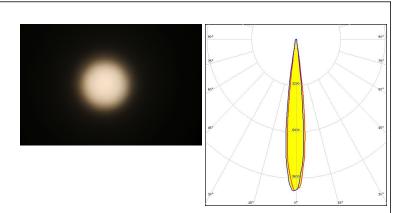


Light distribution files

OPTICAL RESULTS (MEASURED):

LUMILEDS

LUXEON CX Plus CoB L04 / L05 (Gen2)

FWHM / FWTM 15.0° / 26.0° Efficiency 85 % Peak intensity 6.7 cd/lm LEDs/each optic White Light colour/type Required components: Bender Wirth: 637a Hekla

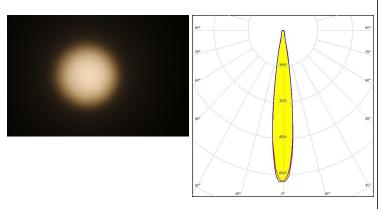


Light distribution files

LUMILEDS

LUXEON CX Plus CoB M02 / M03 (Gen2)

FWHM / FWTM 11.0° / 19.0° Efficiency 86 % Peak intensity 13.1 cd/lm LEDs/each optic

Light colour/type White Required components: Bender Wirth: 641a Hekla

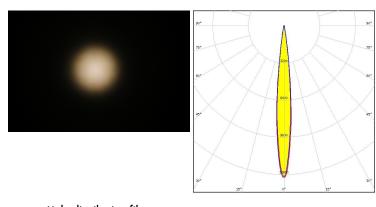

Light distribution files


LUMILEDS

LED LUXEON CX Plus CoB S01 (Gen2)

FWHM / FWTM 8.0° / 13.0° Efficiency 87 % Peak intensity 27.6 cd/lm LEDs/each optic Light colour/type White Required components:

Bender Wirth: 634c Hekla





Light distribution files

OPTICAL RESULTS (MEASURED):



LED CxM-11 (19x19)
FWHM / FWTM 16.0° / 27.0°
Efficiency 84 %
Peak intensity 5.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15859_HEKLA-SOCKET-I


Light distribution files



LED CXM-3
FWHM / FWTM 6.0° / 11.0°
Efficiency 88 %
Peak intensity 36.9 cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour/type White
Required components:

F15255_HEKLA-SOCKET-C

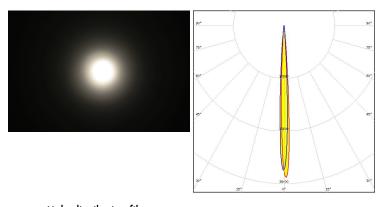


Light distribution files



LED CXM-4
FWHM / FWTM 7.0° / 13.0°
Efficiency 86 %
Peak intensity 27.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15255_HEKLA-SOCKET-C

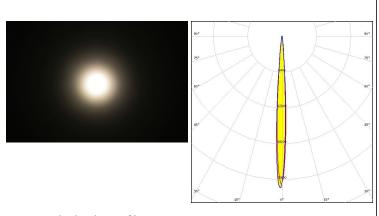


Light distribution files

7/12

OPTICAL RESULTS (MEASURED):

SAMSUNG


LED LC020C
FWHM / FWTM 11.0° / 19.0°
Efficiency 84 %
Peak intensity 13 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15848_HEKLA-SOCKET-G

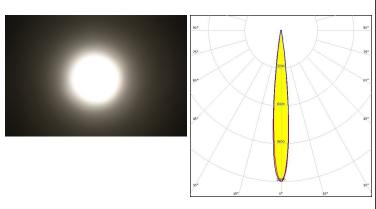

Light distribution files

XICATO


LED XOB 6 mm
FWHM / FWTM 9.0° / 15.0°
Efficiency 83 %
Peak intensity 20.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15255_HEKLA-SOCKET-C

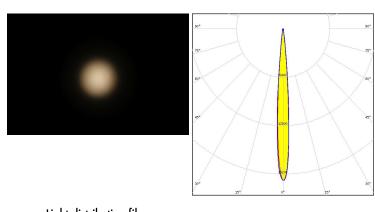

Light distribution files

XICATO

LED XOB 9.8 mm
FWHM / FWTM 12.0° / 21.0°
Efficiency 85 %
Peak intensity 10.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F15255_HEKLA-SOCKET-C

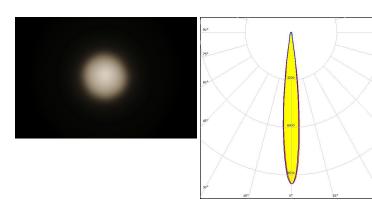


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED V10 Gen7
FWHM / FWTM 14.0° / 24.0°
Efficiency 86 %
Peak intensity 9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F15255_HEKLA-SOCKET-C




Light distribution files



LED V4 HD Gen 7
FWHM / FWTM 8.0° / 14.0°
Efficiency 88 %
Peak intensity 33.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15253_HEKLA-SOCKET-A




Light distribution files

bridgelux.

LED V6 HD Gen 7
FWHM / FWTM 10.0° / 18.0°
Efficiency 87 %
Peak intensity 20.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15255_HEKLA-SOCKET-C



Light distribution files

OPTICAL RESULTS (SIMULATED):

CITIZEN

LED CLL02x/CLU02x (LES10)

 FWHM / FWTM
 14.0° / 25.0°


 Efficiency
 90 %

 Peak intensity
 10.4 cd/lm

LEDs/each optic 1
Light colour/type White

Required components:

F15255_HEKLA-SOCKET-C



Light distribution files




 LED
 CMU15xx

 FWHM / FWTM
 19.0° / 36.0°

 Efficiency
 82 %

Peak intensity 4.1 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F17438_HEKLA-G2-I



Light distribution files




LED MJT COB LES 6 FWHM / FWTM 9.0° / 17.0°

Efficiency 87 %
Peak intensity 22.4 cd/lm

LEDs/each optic 1
Light colour/type White
Required components:

F15255_HEKLA-SOCKET-C



Light distribution files

OPTICAL RESULTS (SIMULATED):



 LED
 MJT COB LES 9.8

 FWHM / FWTM
 15.0° / 24.0°


 Efficiency
 85 %

 Postk intensity
 9.5 od/les

Peak intensity 8.5 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F15255_HEKLA-SOCKET-C



Light distribution files

TRIDONIC

 LED
 SLE G7 LES09


 FWHM / FWTM
 14.0° / 24.0°

 Efficiency
 87 %

Peak intensity 9.8 cd/lm LEDs/each optic 1

Light colour/type White Required components:

F15255_HEKLA-SOCKET-C



Light distribution files



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

12/12

www.ledil.com/ where_to_buy