


DAISY-MINI-WWW-D

~65° extra wide beam. Variant with diffused lenses.

SPECIFICATION:

Dimensions	279.5 x 21.0
Height	13.3 mm
Fastening	pin, screw, snaps
ROHS compliant	yes ⓘ

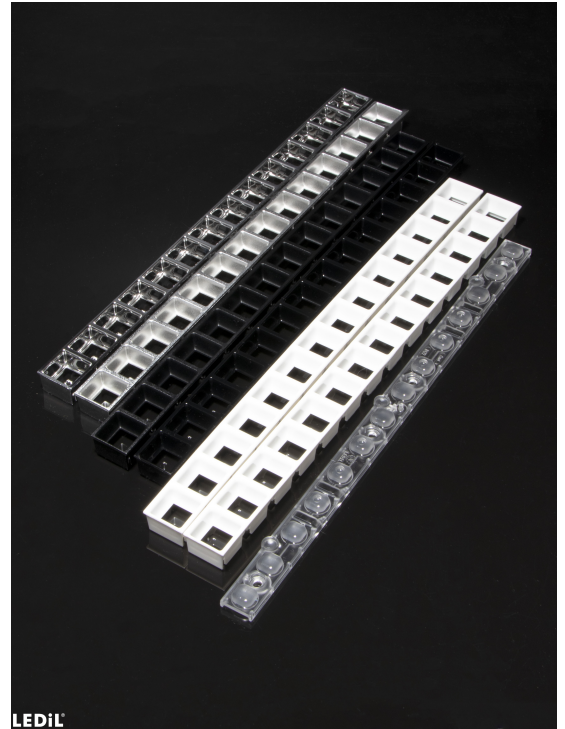

MATERIALS:


Component	Type	Material	Colour	Finish	Length (mm)
F18127_DAISY-MINI-WWW-D	Linear lens	PMMA	milky		
F17667_DAISY-MINI-SHD-MET-MATT	Shade	PC	metal	matt	
F17666_DAISY-MINI-SHD-MET	Shade	PC	metal	gloss	
F17465_DAISY-MINI-SHD-WHT-MATT	Shade	PC	white	matt	
F17034_DAISY-MINI-SHD-MATT	Shade	PC	black	matt	
F17033_DAISY-MINI-SHD-WHT	Shade	PC	white	gloss	
F17028_DAISY-MINI-SHD	Shade	PC	black	gloss	

ORDERING INFORMATION:

Quantities for one set:

Linear lens	1
Shade	1

Component		Qty in box	MOQ	MPQ	Box weight (kg)
F18127_DAISSY-MINI-WWW-D » Box size: 398 x 298 x 265 mm	Linear lens	252	252	12	6.1
F17034_DAISSY-MINI-SHD-MATT » Box size: 398 x 298 x 265 mm	Shade	252	252	4	6.1
F17465_DAISSY-MINI-SHD-WHT-MATT » Box size: 398 x 298 x 265 mm	Shade	252	252	4	6.2
F17666_DAISSY-MINI-SHD-MET » Box size: 398 x 298 x 265 mm	Shade	252	252	4	5.9
F17028_DAISSY-MINI-SHD » Box size: 398 x 298 x 265 mm	Shade	252	252	4	5.9
F17667_DAISSY-MINI-SHD-MET-MATT » Box size: 398 x 298 x 265 mm	Shade	252	252	4	6.2
F17033_DAISSY-MINI-SHD-WHT » Box size: 398 x 298 x 265 mm	Shade	252	252	4	5.9

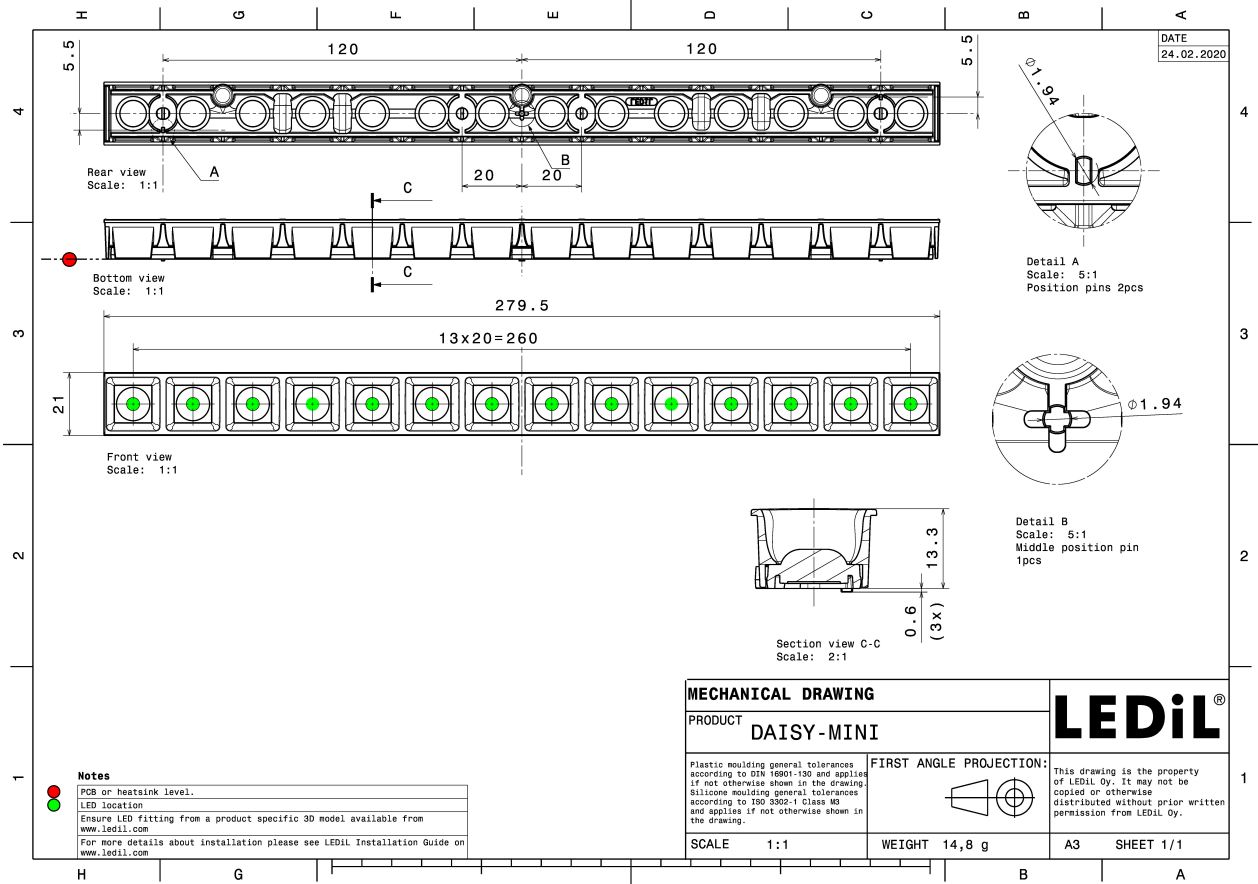

See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):



LED J Series 2835
 FWHM / FWTM 67.0° / 91.0°
 Efficiency 86 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White

Required components:

F17667_DAISSY-MINI-SHD-MET-MATT

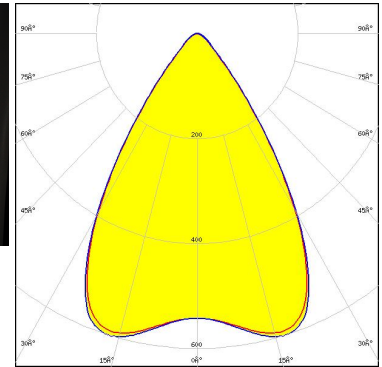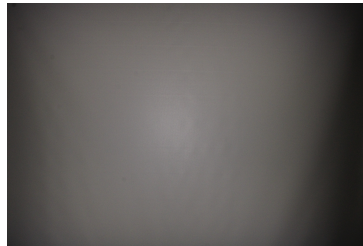


Light distribution files



LED LED-St-L28W2-840-C010-06 (Daisy-Mini)
 FWHM / FWTM 65.0° / 90.0°
 Efficiency 66 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour/type White

Required components:

F17028_DAISSY-MINI-SHD

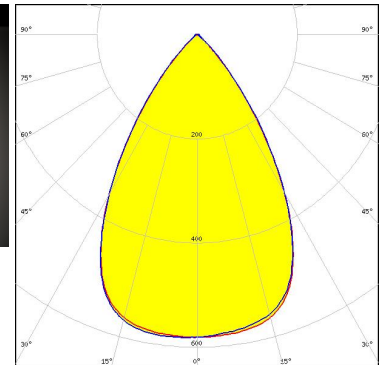



Light distribution files



LED LED-St-L28W2-927-C010-965-C010-07 (Daisy-Mini)
 FWHM / FWTM 65.0° / 90.0°
 Efficiency 67 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour/type Tunable White

Required components:

F17028_DAISSY-MINI-SHD

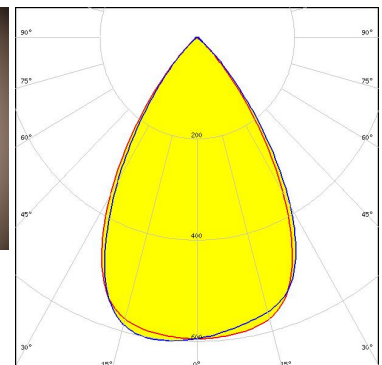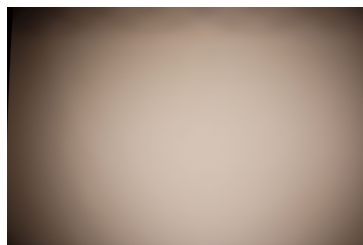


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XQ-E HI
FWHM / FWTM 68.0°
Efficiency 67 %
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISSY-MINI-SHD

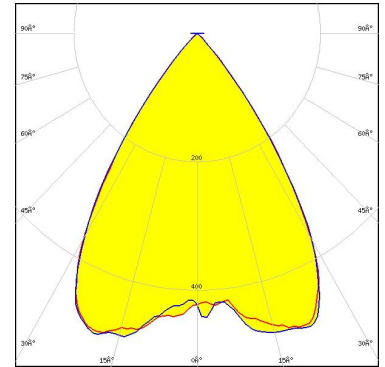

Light distribution files



LED LUXEON 3030 2D (Round LES)
FWHM / FWTM 63.0°
Efficiency 67 %
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISSY-MINI-SHD

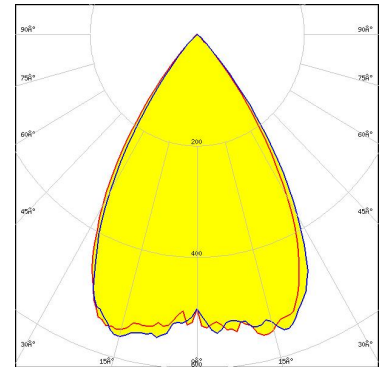

Light distribution files




LED LUXEON HL1Z
FWHM / FWTM 60.0° / 76.0°
Efficiency 67 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISSY-MINI-SHD

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NCSxE17A
FWHM / FWTM 62.0°
Efficiency 65 %
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

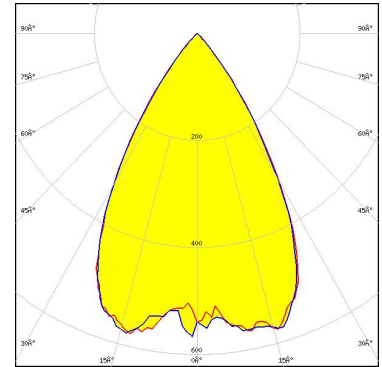

Light distribution files




LED NFSx757G
FWHM / FWTM 65.0°
Efficiency 69 %
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

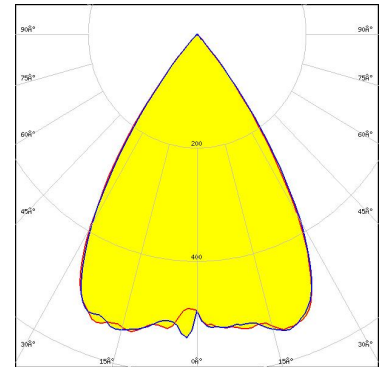

Light distribution files



LED NVSxE21A
FWHM / FWTM 62.0°
Efficiency 64 %
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

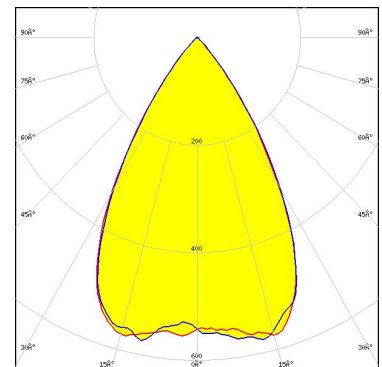

Light distribution files


OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LH231B
FWHM / FWTM 65.0° / 86.0°
Efficiency 67 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F17034_DAISY-MINI-SHD-MATT

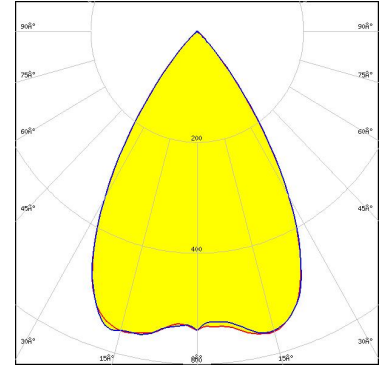


Light distribution files

SAMSUNG

LED LM101B
FWHM / FWTM 63.0°
Efficiency 67 %
LEDs/each optic 1
Light colour/type White

Required components:

F17028_DAISY-MINI-SHD

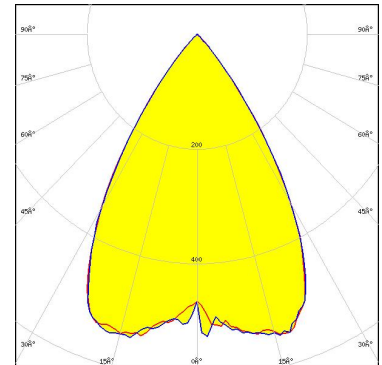


Light distribution files

SAMSUNG

LED LM28xB Series
FWHM / FWTM 64.0°
Efficiency 68 %
LEDs/each optic 1
Light colour/type White

Required components:

F17028_DAISY-MINI-SHD

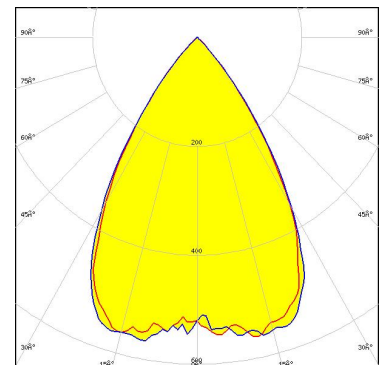

Light distribution files


OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LM301B EVO
FWHM / FWTM 68.0° / 92.0°
Efficiency 87 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F17034_DAISSY-MINI-SHD-MATT

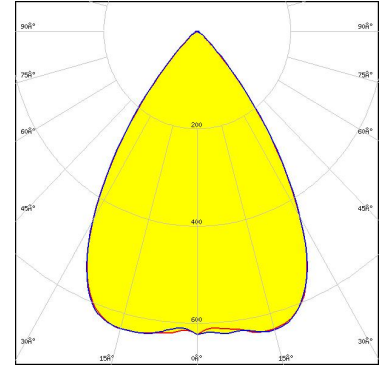


Light distribution files

SAMSUNG

LED LM302Z plus
FWHM / FWTM 65.0°
Efficiency 68 %
LEDs/each optic 1
Light colour/type White

Required components:

F17028_DAISSY-MINI-SHD

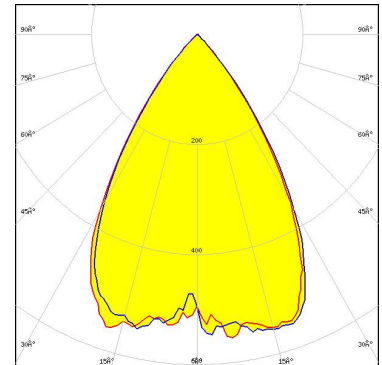


Light distribution files

SAMSUNG

LED LM561B
FWHM / FWTM 69.0 + 65.0°
Efficiency 80 %
LEDs/each optic 1
Light colour/type White

Required components:

F17465_DAISSY-MINI-SHD-WHT-MATT

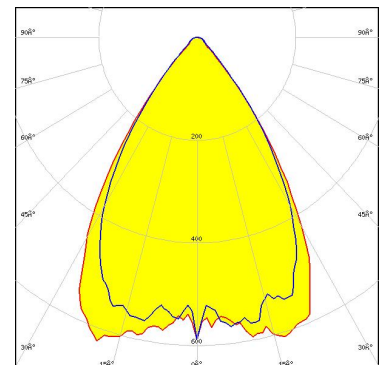


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LM561B
FWHM / FWTM 69.0 + 65.0°
Efficiency 81 %
LEDs/each optic 1
Light colour/type White
Required components:
F17666_DAISY-MINI-SHD-MET

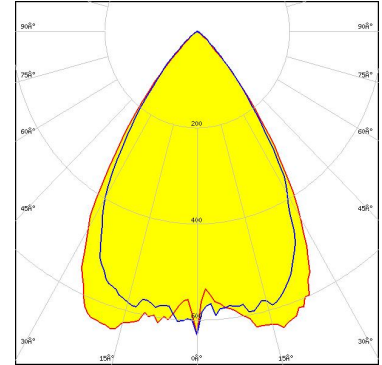

Light distribution files

SAMSUNG


LED LM561B
FWHM / FWTM 69.0 + 65.0°
Efficiency 80 %
LEDs/each optic 1
Light colour/type White
Required components:
F17033_DAISY-MINI-SHD-WHT

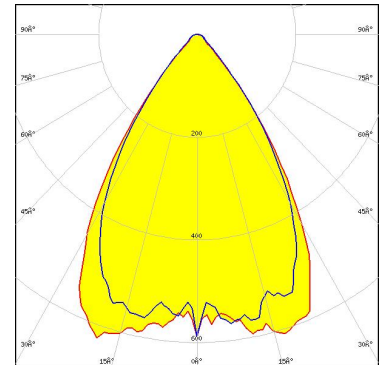

Light distribution files

SAMSUNG

LED LM561B
FWHM / FWTM 68.0 + 64.0°
Efficiency 68 %
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

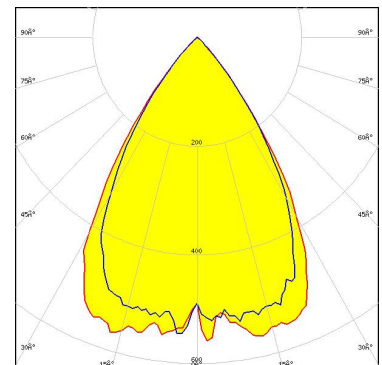


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LM561B
FWHM / FWTM 72.0 + 70.0°
Efficiency 80 %
LEDs/each optic 1
Light colour/type White
Required components:
F17667_DAISY-MINI-SHD-MET-MATT

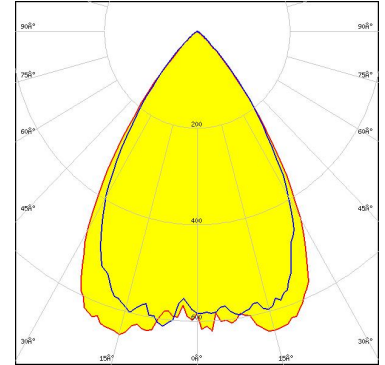

Light distribution files




LED SEOUL 3030
FWHM / FWTM 66.0°
Efficiency 68 %
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

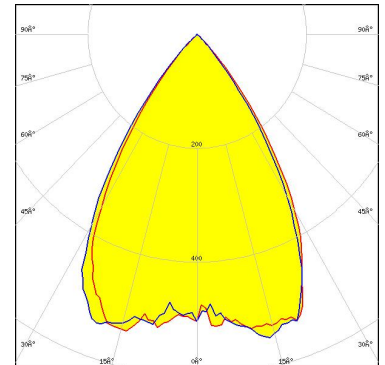

Light distribution files



LED SEOUL 3030
FWHM / FWTM 68.0° / 88.0°
Efficiency 69 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

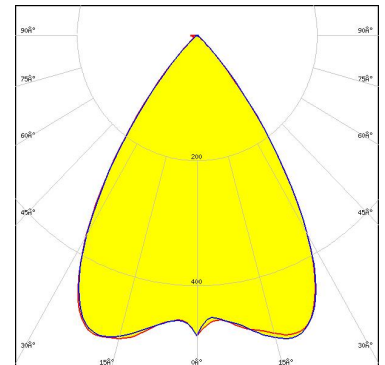

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)