

FLARE-MAXI

34 x 33 mm lens with ~100° x 15° oval beam

SPECIFICATION:

Dimensions	33.9 x 33.3
Height	16.7 mm
Fastening	glue, pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
FLARE-MAXI	Single lens	PMMA	clear		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C12868_FLARE-MAXI » Box size:	840	168	168	9.5


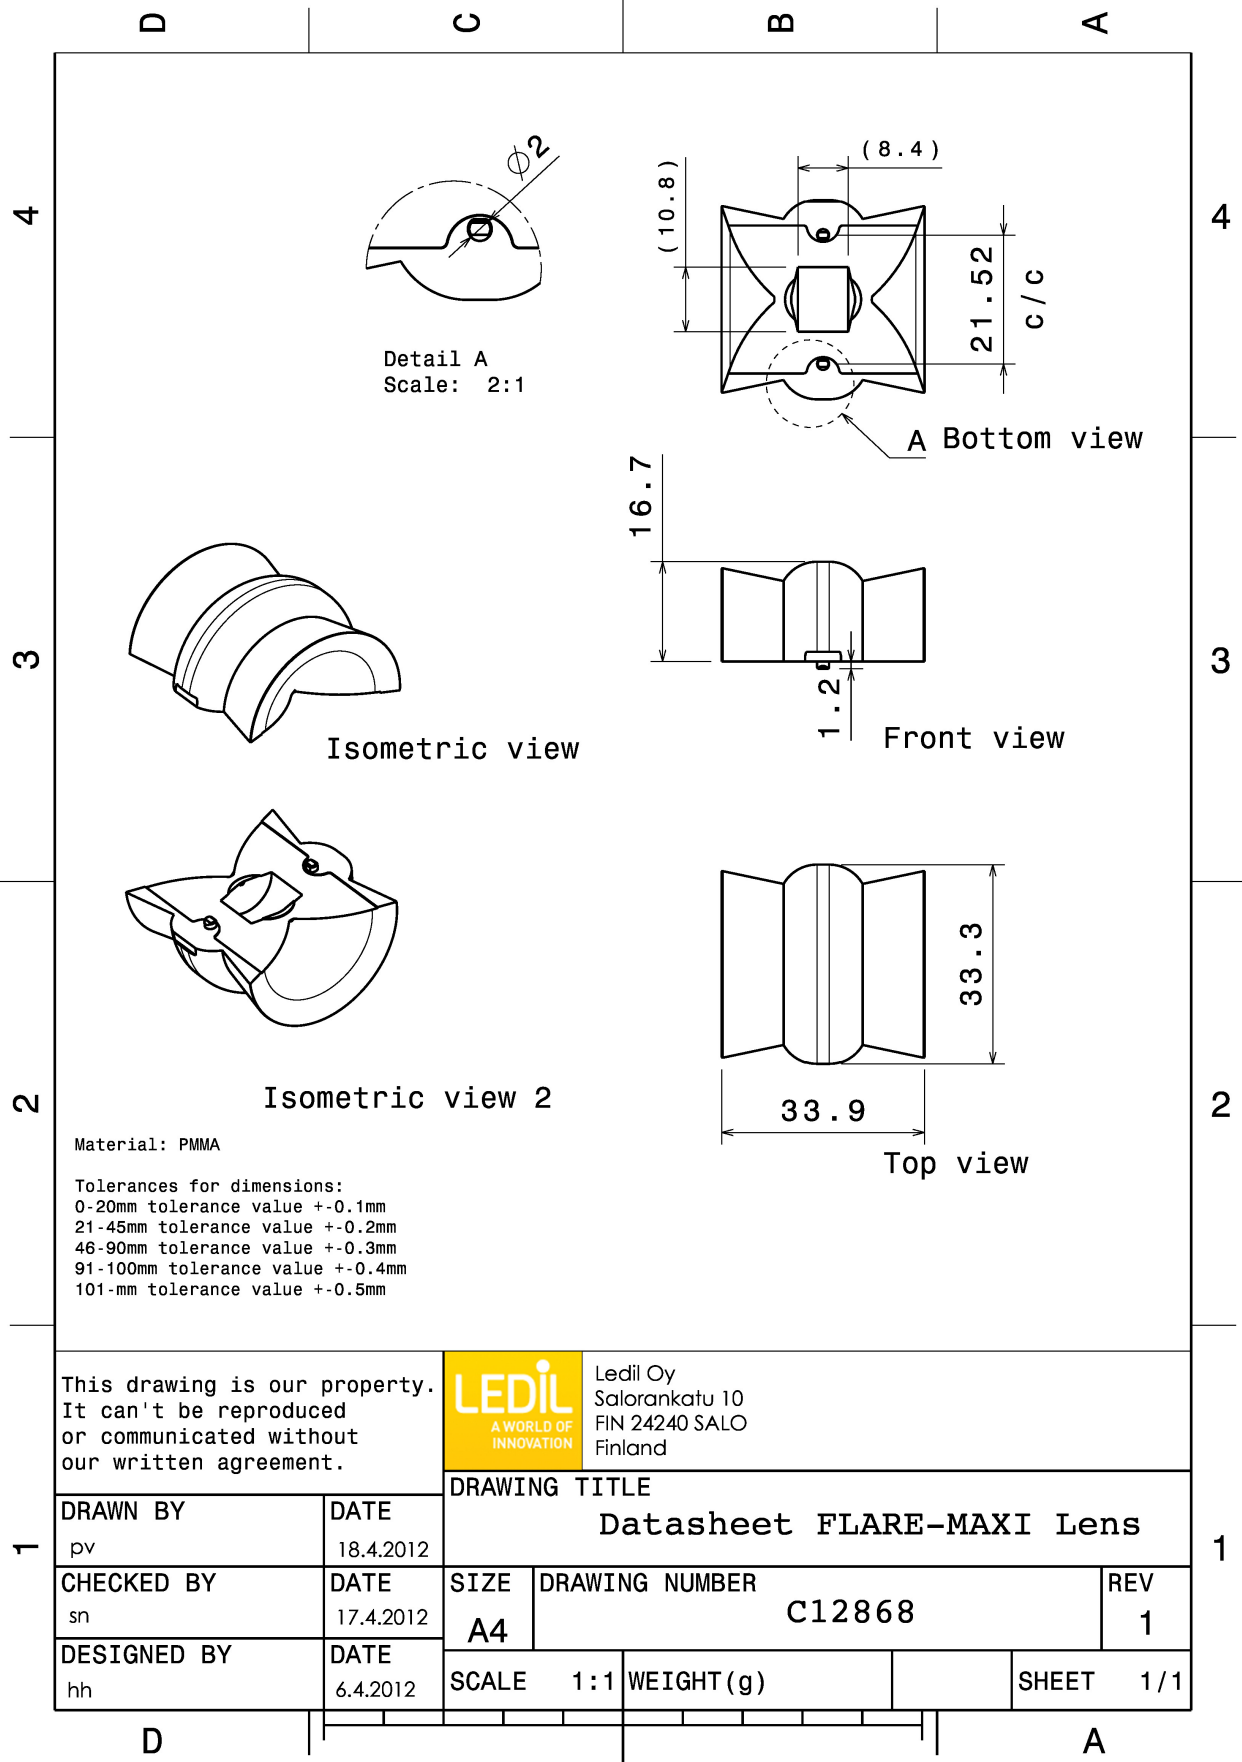


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED XHP70.2
FWHM / FWTM 105.0 + 28.0° / 153.0 + 38.0°
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

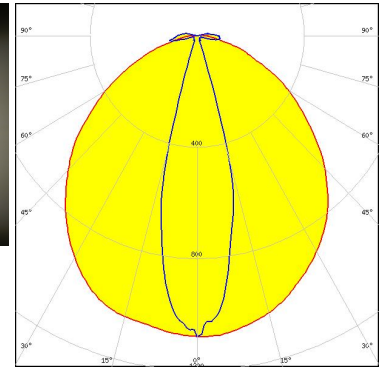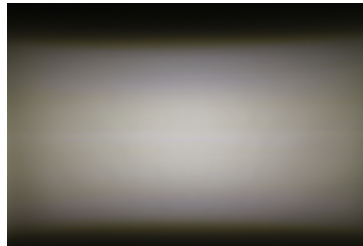

Light distribution files





LED XM-L
FWHM / FWTM 96.0 + 15.0° / 147.0 + 28.0°
Efficiency 94 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

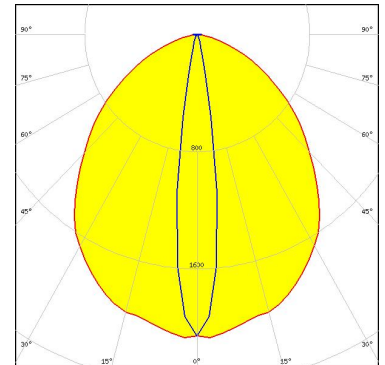

Light distribution files



LED XM-L2
FWHM / FWTM 95.0 + 14.0° / 145.0 + 18.0°
Efficiency 94 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

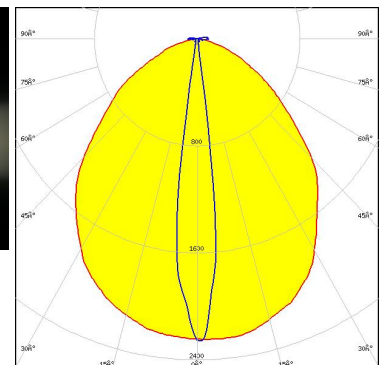
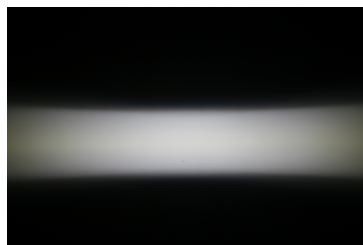


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XP-E
 FWHM / FWTM 94.0 + 6.0° / 149.0 + 10.0°
 Efficiency 94 %
 Peak intensity 4.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

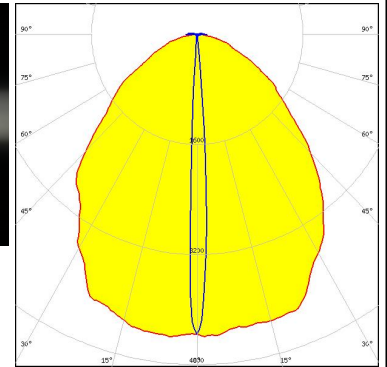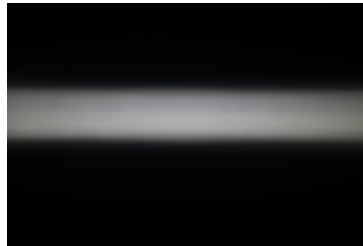

Light distribution files




LED XP-E2
 FWHM / FWTM 91.0 + 6.0° / 146.0 + 10.0°
 Efficiency 94 %
 Peak intensity 4.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

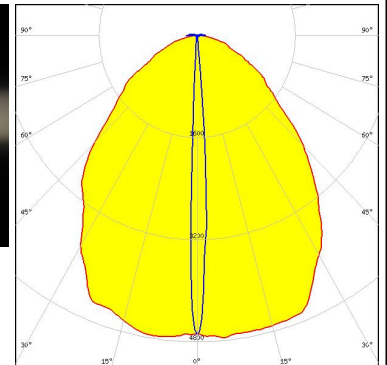

Light distribution files



LED XP-G
 FWHM / FWTM 105.0 + 11.0° / 152.0 + 22.0°
 Efficiency 94 %
 Peak intensity 2.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


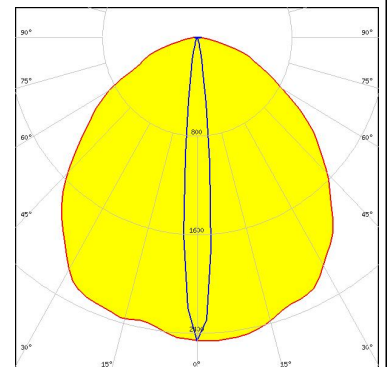


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-G2
FWHM / FWTM 96.0 + 10.0° / 147.0 + 15.0°
Efficiency 94 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

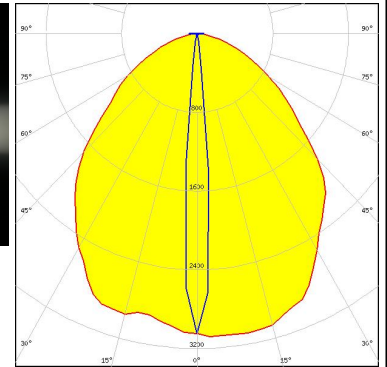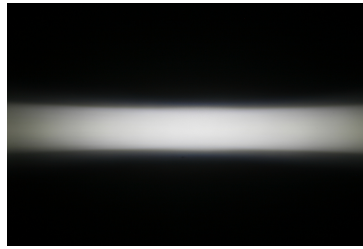

Light distribution files




LED XP-L HD
FWHM / FWTM 115.0 + 13.0° / 149.0 + 19.0°
Efficiency 94 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

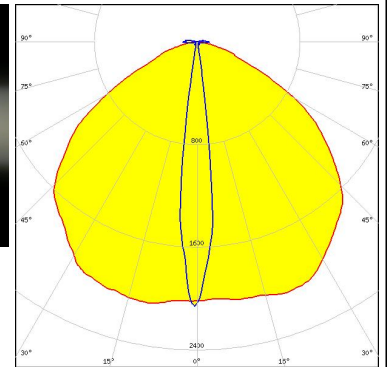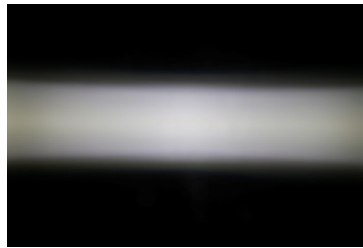

Light distribution files



LED XT-E
FWHM / FWTM 96.0 + 10.0° / 160.0 + 23.0°
Efficiency 94 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


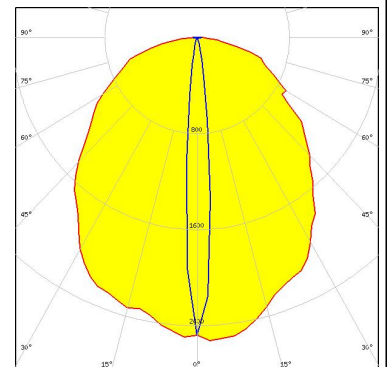


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON M/MX
 FWHM / FWTM 100.0 + 23.0° / 147.0 + 36.0°
 Efficiency 94 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

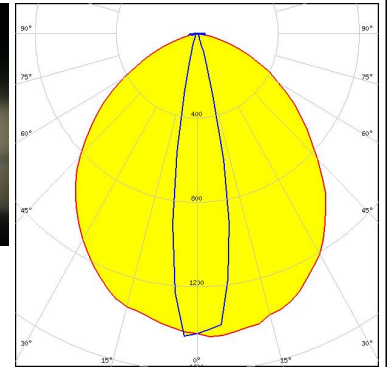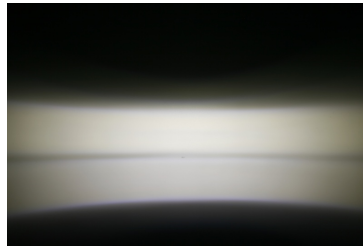

Light distribution files




LED LUXEON Rebel ES
 FWHM / FWTM 91.0 + 10.0° / 144.0 + 20.0°
 Efficiency 94 %
 Peak intensity 2.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

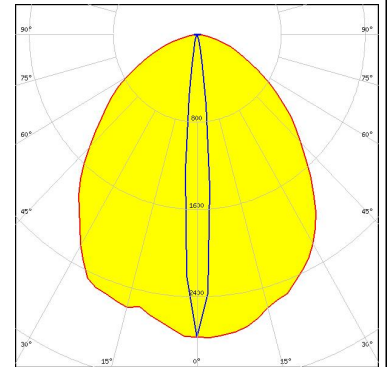

Light distribution files



LED LUXEON T
 FWHM / FWTM 96.0 + 10.0° / 147.0 + 115.0°
 Efficiency 92 %
 Peak intensity 2.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

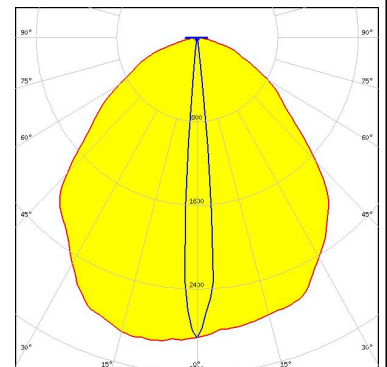


Light distribution files

OPTICAL RESULTS (MEASURED):





LED LUXEON TX
FWHM / FWTM 96.0 + 9.0° / 141.0 + 14.0°
Efficiency 94 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

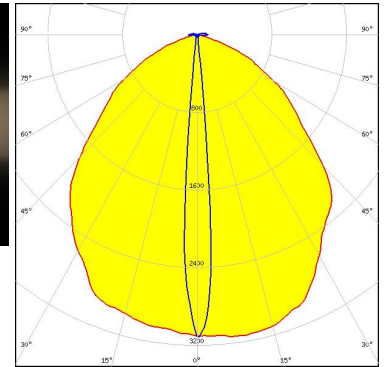

Light distribution files





LED NCSxx19B
FWHM / FWTM 98.0 + 9.0° / 155.0 + 15.0°
Efficiency 94 %
Peak intensity 3.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

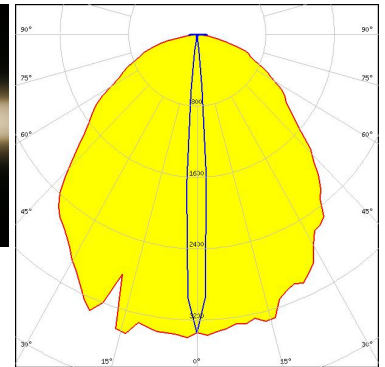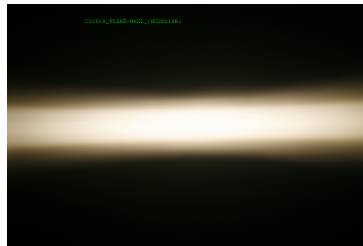

Light distribution files



LED NV4x144A
FWHM / FWTM 108.0 + 19.0° / 157.0 + 27.0°
Efficiency 94 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

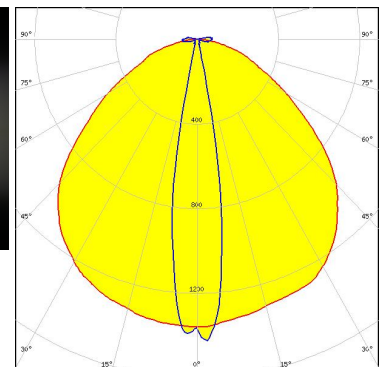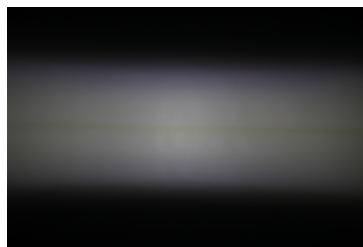


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NVSxx19B/NVSxx19C
FWHM / FWTM 98.0 + 11.0° / 153.0 + 23.0°
Efficiency 94 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

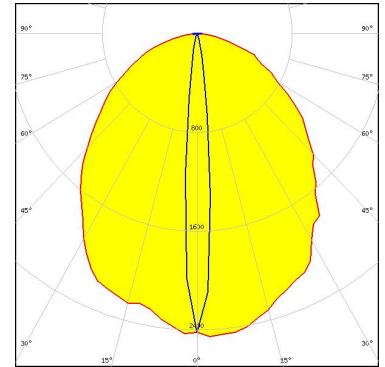

Light distribution files




LED NWSx229A
FWHM / FWTM 122.0 + 13.0° / 147.0 + 20.0°
Efficiency 94 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

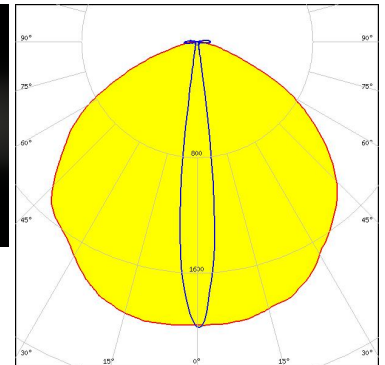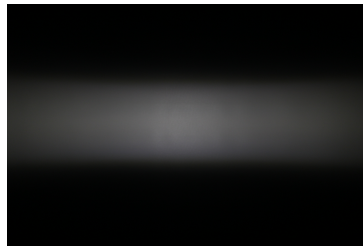

Light distribution files



LED OSLOM Square PC
FWHM / FWTM 98.0 + 13.0° / 153.0 + 25.0°
Efficiency 94 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


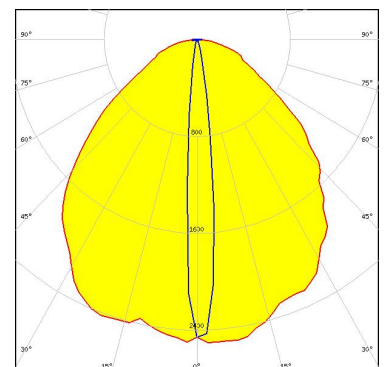


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG

LED LH351Z
FWHM / FWTM 95.0 + 9.0° / 125.0 + 13.0°
Efficiency 94 %
Peak intensity 3.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

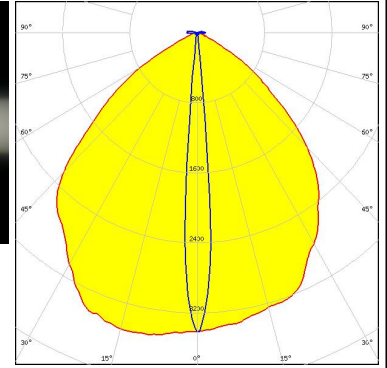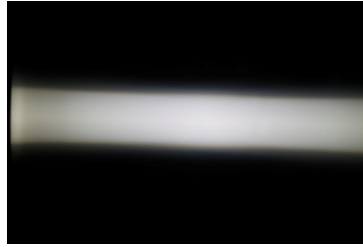


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XD16
FWHM / FWTM 60.0 + 7.0° / 143.0 + 13.0°
Efficiency 94 %
Peak intensity 3.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

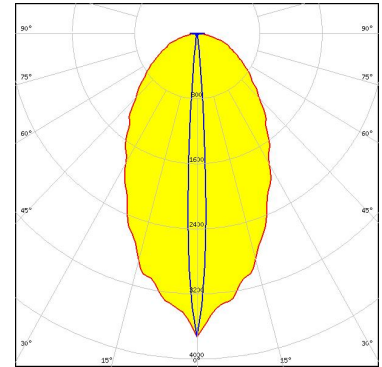

Light distribution files




LED XHP50.3 HD
FWHM / FWTM 92.0 + 20.0° / 139.0 + 28.0°
Efficiency 95 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

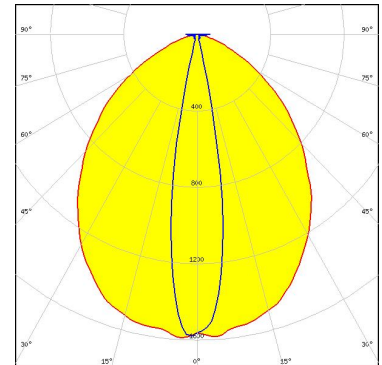

Light distribution files



LED XHP70.3 HI
FWHM / FWTM 86.0 + 18.0° / 141.0 + 29.0°
Efficiency 96 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

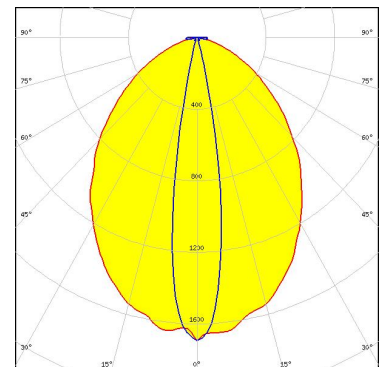


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G2 HE
 FWHM / FWTM 75.0 + 11.0° / 137.0 + 18.0°
 Efficiency 95 %
 Peak intensity 2.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

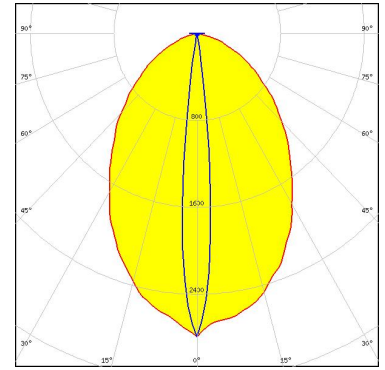

Light distribution files




LED LUXEON 7070
 FWHM / FWTM 92.0 + 25.0° / 146.0 + 100.0°
 Efficiency 96 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

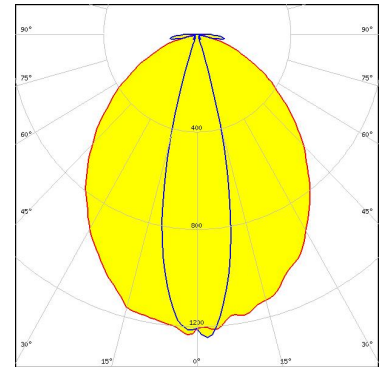

Light distribution files



LED LUXEON H50-2
 FWHM / FWTM 9.5 + 64.0° / 15.0 + 122.0°
 Efficiency 92 %
 Peak intensity 3.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

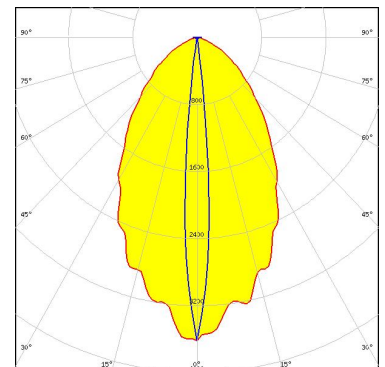


Light distribution files

OPTICAL RESULTS (SIMULATED):





LED LUXEON V
FWHM / FWTM 12.0 + 79.0° / 23.0 + 143.0°
Efficiency 93 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

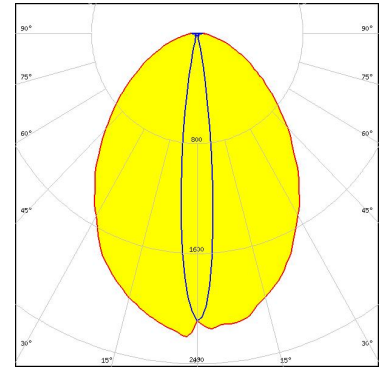

Light distribution files




LED SFT-70X-WES-Gen2
FWHM / FWTM 90.0 + 12.0° / 136.0 + 18.0°
Efficiency 96 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

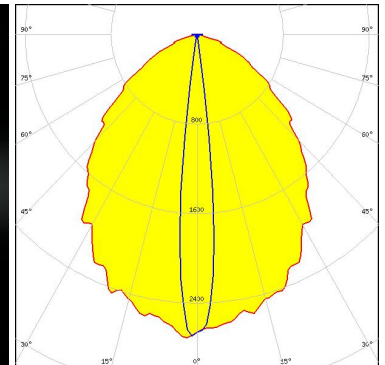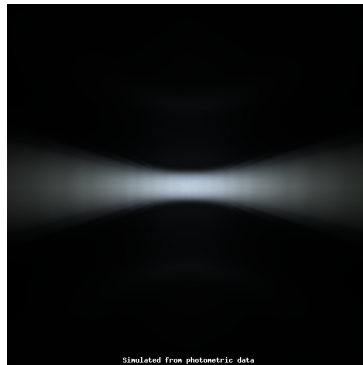

Light distribution files



LED NVSW219D
FWHM / FWTM 85.0 + 12.0° / 127.0 + 21.0°
Efficiency 94 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

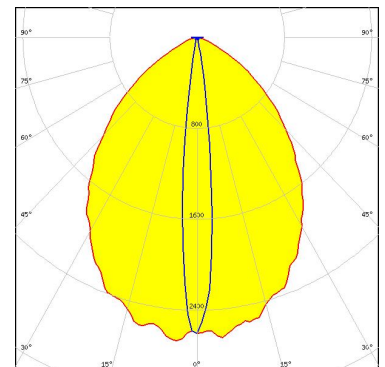


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NVSW3x9A
 FWHM / FWTM 95.0 + 12.0° / 144.0 + 22.0°
 Efficiency 94 %
 Peak intensity 2.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

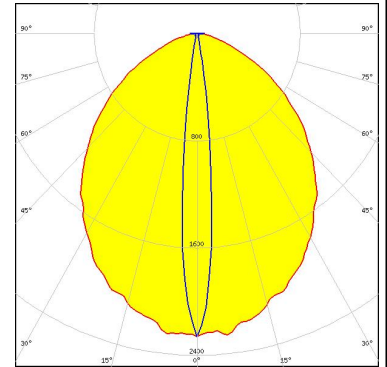

Light distribution files




LED OSCONIQ P 3737 (3W version)
 FWHM / FWTM 69.0 + 12.0° / 133.0 + 20.0°
 Efficiency 95 %
 Peak intensity 2.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

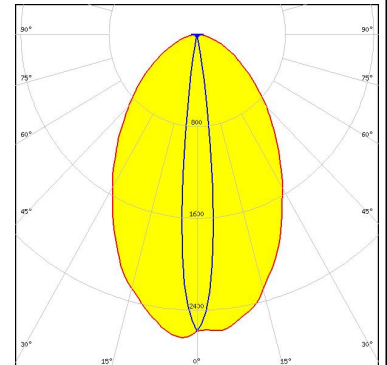


Light distribution files



LED OSCONIQ P 7070
 FWHM / FWTM 84.0 + 18.0° / 140.0 + 23.0°
 Efficiency 93 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:



Detector image: illumination
 24 x 2880
 0.000000 m 1.000000 m 1.000000 m
 0.000000 m 0.000000 m 0.000000 m
 0.000000 m 0.000000 m 0.000000 m

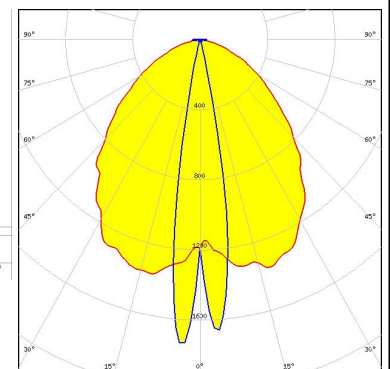


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON SSL 80
FWHM / FWTM 46.0 + 6.0° / 101.0 + 12.0°
Efficiency 95 %
Peak intensity 5.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

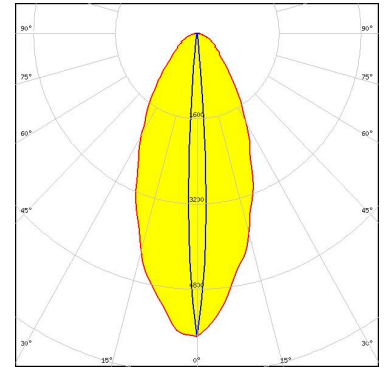

Light distribution files

SAMSUNG


LED LH351B
FWHM / FWTM 68.0 + 10.0° / 126.0 + 17.0°
Efficiency 94 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

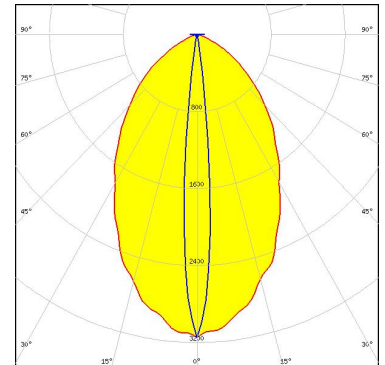

Light distribution files

SAMSUNG

LED LH351C
FWHM / FWTM 74.0 + 11.0° / 126.0 + 20.0°
Efficiency 94 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

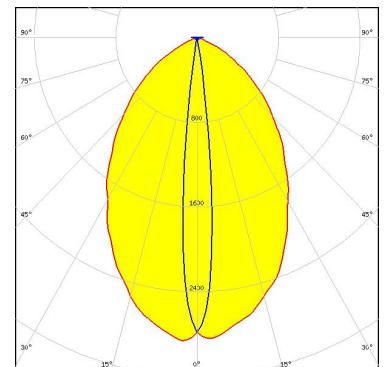


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED	LH502C
FWHM / FWTM	93.0 + 18.0° / 140.0 + 27.0°
Efficiency	95 %
Peak intensity	1.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

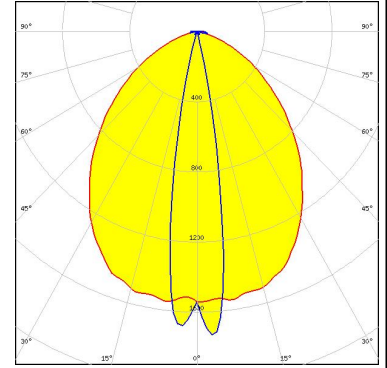

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)