

PRODUCT DATASHEET FCP15707_FLORENTINA-2X2-MRK-BW

FLORENTINA-2X2-MRK-BW

~60° batwing beam compatible with ultra high power LEDs

SPECIFICATION:

Dimensions	89.7 x 89.7 mm
Height	29.7 mm
Fastening	pin, screw
ROHS compliant	yes 🛈




MATERIALS:

Component	Туре	Material	Colour	Finish
ROSE-MRK-BW	Single lens	PC	clear	
FLORENTINA-2X2-HLD	Holder	PC	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FCP15707_FLORENTINA-2X2-MRK-BW	Single lens	88	24	8	3.5
» Box size: 476 x 273 x 292 mm					

PRODUCT DATASHEET FCP15707_FLORENTINA-2X2-MRK-BW

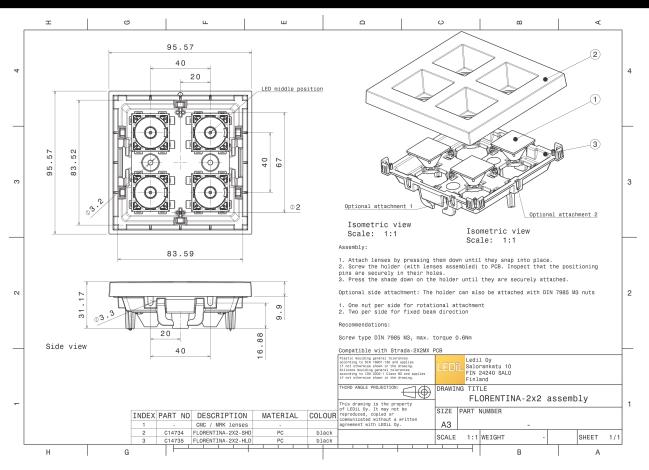

See also our general installation guide: <u>www.ledil.com/installation_guide</u>



OPTICAL RESULTS (MEASURED):

				90*	90*
LED	XHP50.2				
FWHM / FWTM	62.0° / 81.0°			751	
Efficiency	61 %			200	$\mathcal{N}\mathcal{N}$
Peak intensity	0.7 cd/lm			60*	
LEDs/each optic	1				
Light colour	White			97.º 400	45
Required compone	nts:				
	NTINA-2X2-SHD				
				600	
				30°	100 301
	EDS			go+	90
LED	LUXEON M/MX				
FWHM / FWTM	64.0° / 84.0°			75	× *
Efficiency	63 %			200	$\sim N \sim$
Peak intensity	0.7 cd/lm			60*	
LEDs/each optic	1				
Light colour	White	and the second second		454 400	
Required compone			A CONTRACTOR OF THE OWNER OF THE		
	NTINA-2X2-SHD				
_				610	
				15% 0%	180
0000414					
OSRAM Opto Semiconductors				90°	904
OSRAM Opto Semiconductors LED	Duris S8			90*	80
Opto Semiconductors	Duris S8 55.0° / 74.0°	5		201 ×	39
Opto Semiconductors		T		25°	
opto Semiconductors LED FWHM / FWTM	55.0° / 74.0°	ſ		25°	
opto Semiconductors LED FWHM / FWTM Efficiency	55.0° / 74.0° 66 %	ſ		25°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity	55.0° / 74.0° 66 % 0.8 cd/lm			25°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic	55.0° / 74.0° 66 % 0.8 cd/lm 1 White	C		25°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	55.0° / 74.0° 66 % 0.8 cd/lm 1 White	C		25°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts:			25°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts:			25°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: :NTINA-2X2-SHD			25°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: ENTINA-2X2-SHD			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SANSU LED	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: :NTINA-2X2-SHD JNG HiLOM SC16 (LH181B)			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SAMSU LED FWHM / FWTM	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD JNG HiLOM SC16 (LH181B) 49.0° / 70.0°			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SAMSU LED FWHM / FWTM Efficiency	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD ING HiLOM SC16 (LH181B) 49.0° / 70.0° 62 %			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SAMSU LED FWHM / FWTM Efficiency Peak intensity	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD JNG HiLOM SC16 (LH181B) 49.0° / 70.0° 62 % 0.9 cd/lm			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SANSU LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD JNGG HiLOM SC16 (LH181B) 49.0° / 70.0° 62 % 0.9 cd/lm 1			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SANSU LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD JNGG HiLOM SC16 (LH181B) 49.0° / 70.0° 62 % 0.9 cd/lm 1 White			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SANSS LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD JNCC HiLOM SC16 (LH181B) 49.0° / 70.0° 62 % 0.9 cd/lm 1 White nts:			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SANSS LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD JNGG HiLOM SC16 (LH181B) 49.0° / 70.0° 62 % 0.9 cd/lm 1 White			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	
opto Semiconductors LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone C14734_FLORE SANSS LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	55.0° / 74.0° 66 % 0.8 cd/lm 1 White nts: INTINA-2X2-SHD JNCC HiLOM SC16 (LH181B) 49.0° / 70.0° 62 % 0.9 cd/lm 1 White nts:			20° 20° 20° 20° 20° 20° 20° 20° 20° 20°	




OPTICAL RESULTS (MEASURED):

SAMSUNG

LED	HiLOM SC16 (LH181B)			
FWHM / FWTM	50.0° / 72.0°			
Efficiency	69 %			
Peak intensity	0.9 cd/lm			
LEDs/each optic	1			
Light colour	White			
Required components:				
C14960_FLORENTINA-2X2-SHD-WHT				







OPTICAL RESULTS (SIMULATED):

	DS	50°
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required component	LUXEON 7070 58.0° / 78.0° 75 % 0.9 cd/lm 1 White S:	
Μ ΝΙCΗΙΛ		50° 50°
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required component C14734_FLOREN		



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy