

HEIDI-SS

~15° smooth spot beam optimized for LUXEON
Rebel ES

SPECIFICATION:

| | |
|----------------|-----------|
| Dimensions | Ø 21.6 |
| Height | 11.7 mm |
| Fastening | tape, pin |
| ROHS compliant | yes ⓘ |




MATERIALS:

| Component | Type | Material | Colour | Finish | Length (mm) |
|------------|-------------|--------------|--------|--------|-------------|
| HEIDI-SS | Single lens | PMMA | clear | | |
| HEIDI-TAPE | Tape | Acrylic foam | black | | |

ORDERING INFORMATION:

| Component | | Qty in box | MOQ | MPQ | Box weight (kg) |
|--------------------------------|-------------|------------|-----|-----|-----------------|
| CA12443_HEIDI-SS | Single lens | 3264 | 204 | 204 | 11.1 |
| » Box size: 480 x 280 x 300 mm | | | | | |


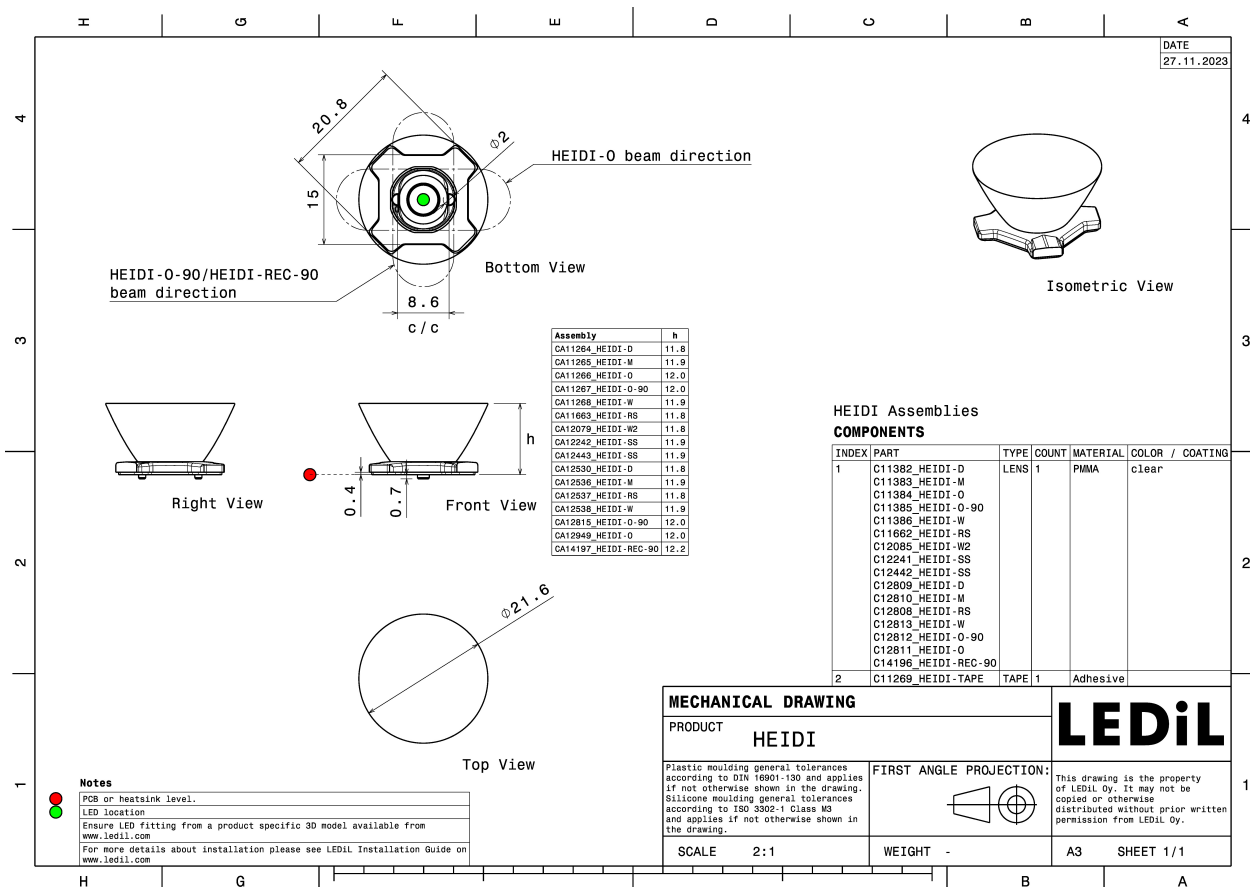


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED XP-G3
FWHM / FWTM 16.0° / 35.0°
Efficiency 94 %
Peak intensity 6.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

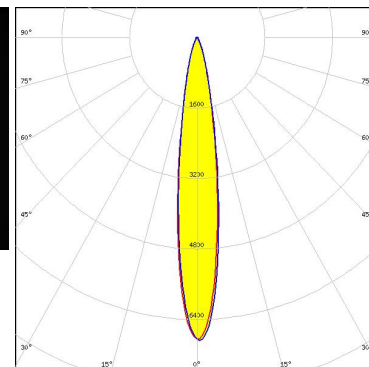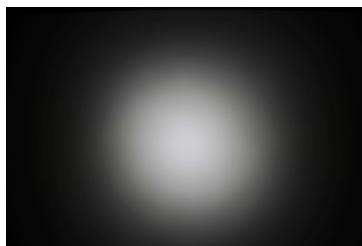

Light distribution files



LED XP-G4
FWHM / FWTM 15.0° / 32.0°
Efficiency 95 %
Peak intensity 7.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

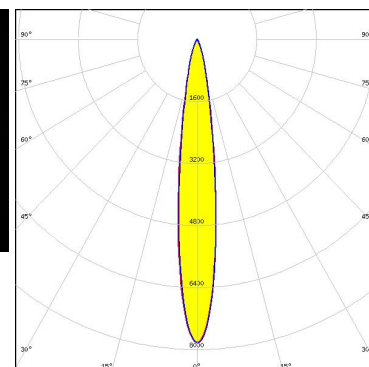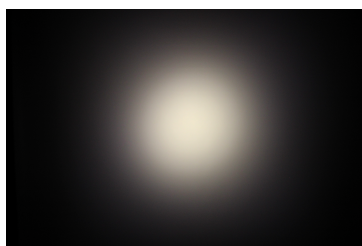

Light distribution files



LED LUXEON R
FWHM / FWTM 16.0° / 36.0°
Efficiency 91 %
Peak intensity 6.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:





Light distribution files

OPTICAL RESULTS (MEASURED):



LED LUXEON Rebel
FWHM / FWTM 14.0° / 31.0°
Efficiency 89 %
Peak intensity 8.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

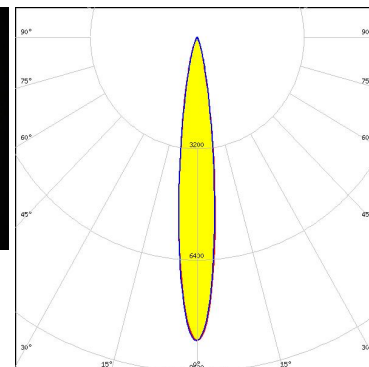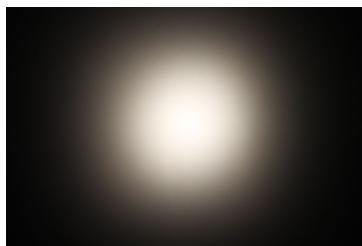

Light distribution files





LED LUXEON Rebel ES
FWHM / FWTM 14.0° / 34.0°
Efficiency 91 %
Peak intensity 6.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files



LED SST-10-B130
FWHM / FWTM 13.0° / 27.0°
Efficiency 95 %
Peak intensity 10.8 cd/lm
LEDs/each optic 1
Light colour/type Blue
Required components:

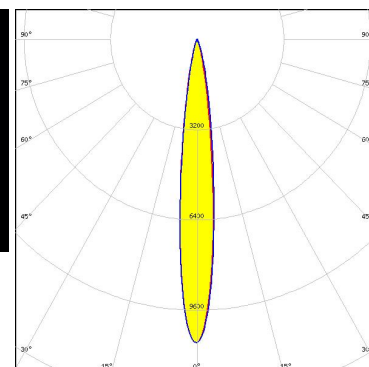
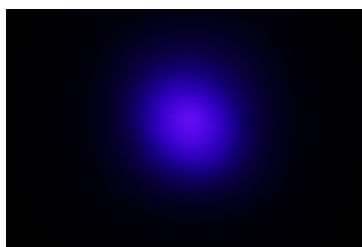


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NVSW219D
FWHM / FWTM 15.0° / 33.0°
Efficiency 94 %
Peak intensity 7.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

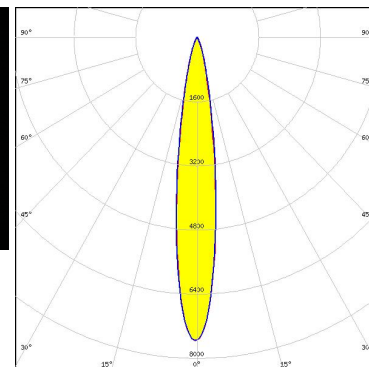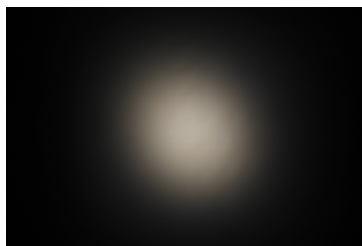

Light distribution files





LED NVSW319B
FWHM / FWTM 16.0° / 35.0°
Efficiency 94 %
Peak intensity 6.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

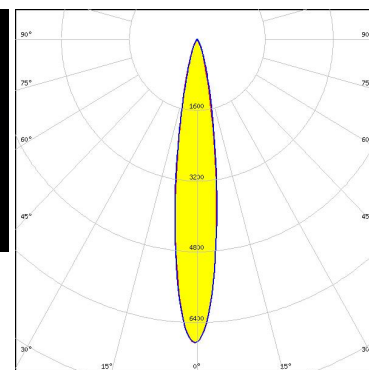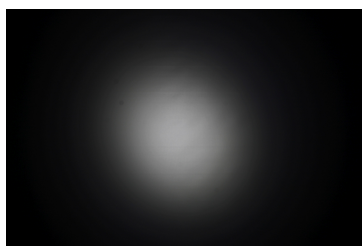

Light distribution files



LED NVSW3x9A
FWHM / FWTM 16.0° / 34.0°
Efficiency 92 %
Peak intensity 6.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

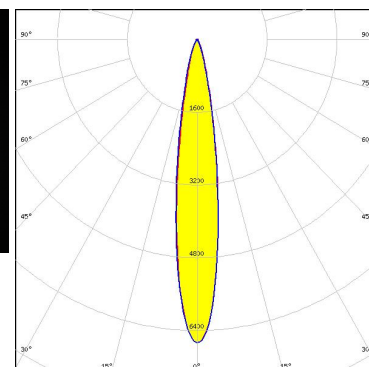
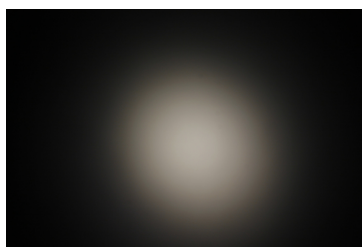


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NVSW519A
FWHM / FWTM 18.0° / 39.0°
Efficiency 95 %
Peak intensity 5.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

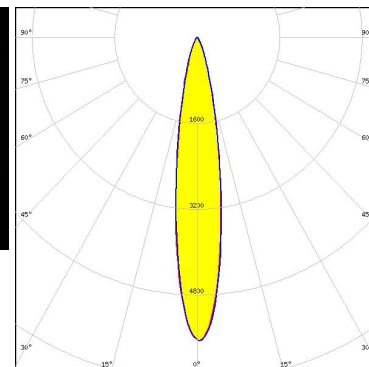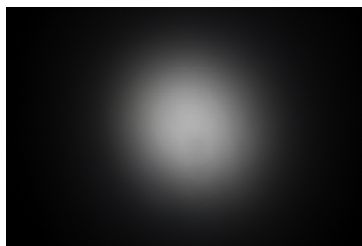

Light distribution files




LED NWSx229A
FWHM / FWTM 18.0° / 39.0°
Efficiency 86 %
Peak intensity 5.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

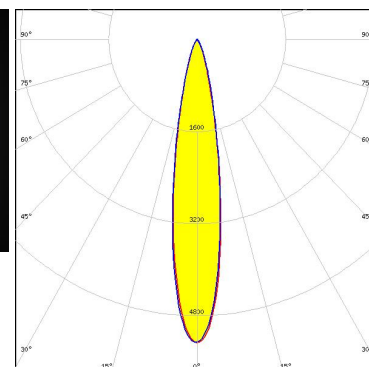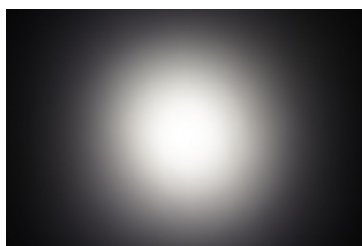

Light distribution files



LED OSLOM SSL 150
FWHM / FWTM 12.0° / 25.0°
Efficiency 91 %
Peak intensity 11.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

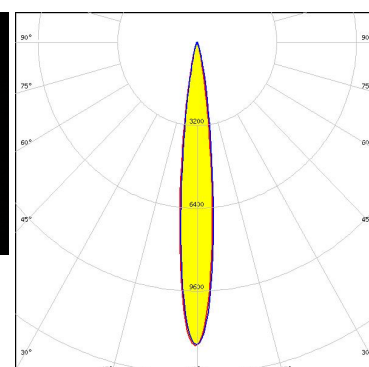


Light distribution files

OPTICAL RESULTS (MEASURED):




LED Z5M3
FWHM / FWTM 15.0° / 33.0°
Efficiency 94 %
Peak intensity 7.2 cd/m
LEDs/each optic 1
Light colour/type White
Required components:

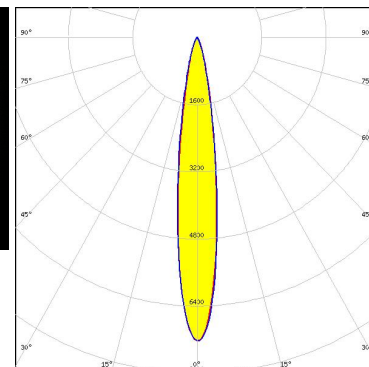

Light distribution files



LED Z8Y22P
FWHM / FWTM 15.0° / 33.0°
Efficiency 94 %
Peak intensity 6.9 cd/m
LEDs/each optic 1
Light colour/type White
Required components:

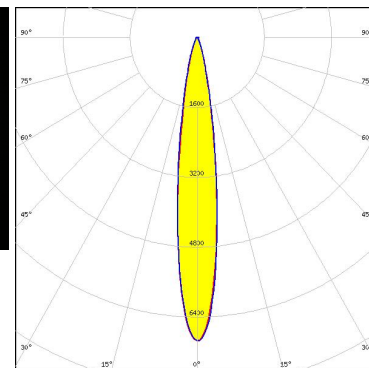


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP35.2 HI
FWHM / FWTM 16.0° / 32.0°
Efficiency 95 %
Peak intensity 7.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

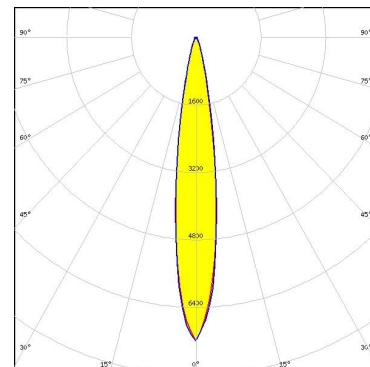

Light distribution files




LED XP-G2
FWHM / FWTM 15.0° / 28.0°
Efficiency 96 %
Peak intensity 11.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

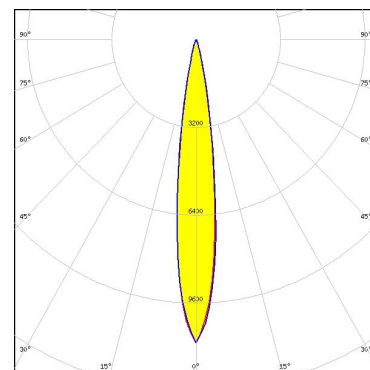

Light distribution files



LED XP-G2 HE
FWHM / FWTM 17.0° / 34.0°
Efficiency 94 %
Peak intensity 7.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

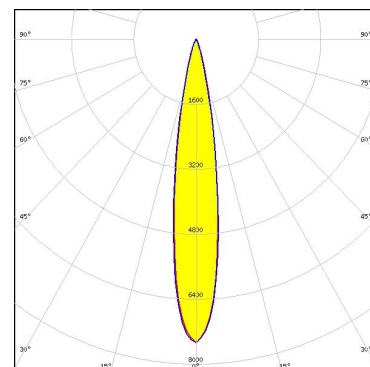


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON HL2Z
 FWHM / FWTM 14.0° / 27.0°
 Efficiency 95 %
 Peak intensity 10.9 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:

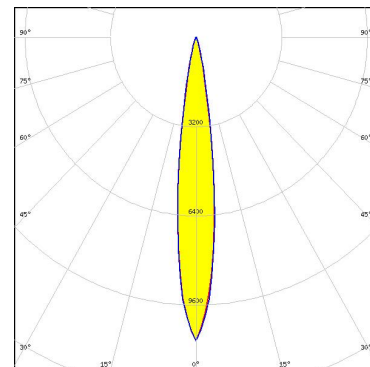

Light distribution files




LED LUXEON SunPlus 20 Line (150 deg)
 FWHM / FWTM 14.0° / 25.0°
 Efficiency 93 %
 Peak intensity 12.5 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:

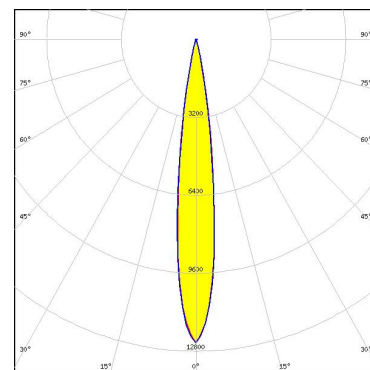

Light distribution files



LED LUXEON SunPlus 35 Line
 FWHM / FWTM 14.0° / 25.0°
 Efficiency 94 %
 Peak intensity 13.6 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:

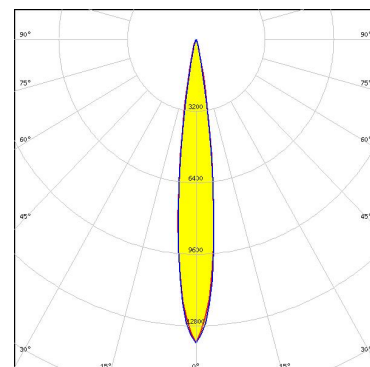


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON TX
FWHM / FWTM 16.0° / 28.0°
Efficiency 95 %
Peak intensity 10.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

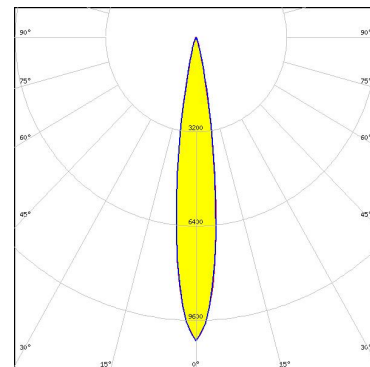

Light distribution files




LED LUXEON Z ES
FWHM / FWTM 14.0° / 24.0°
Efficiency 95 %
Peak intensity 13.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

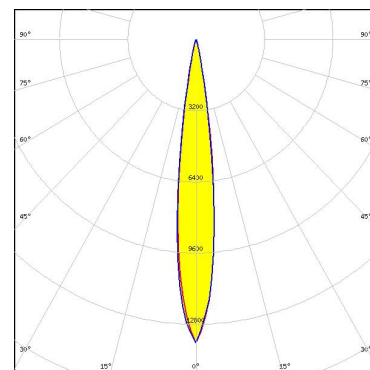

Light distribution files



LED NV4WB35AM
FWHM / FWTM 17.0° / 34.0°
Efficiency 96 %
Peak intensity 7.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

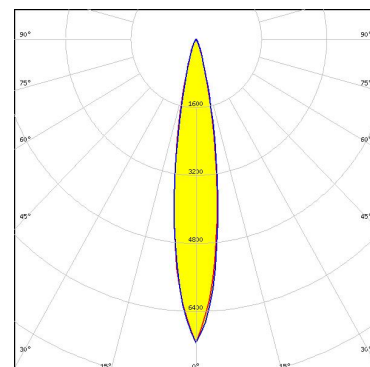


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NVSxE21A
 FWHM / FWTM 14.0° / 27.0°
 Efficiency 94 %
 Peak intensity 11.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

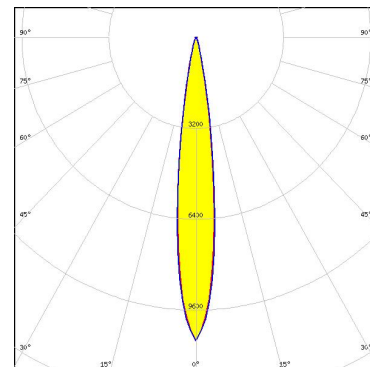

Light distribution files




LED OSCONIQ P 3737 Flat
 FWHM / FWTM 14.0° / 29.0°
 Efficiency 96 %
 Peak intensity 10.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

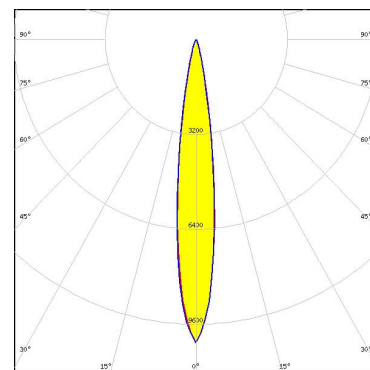

Light distribution files



LED OSLON Black
 FWHM / FWTM 14.0° / 26.0°
 Efficiency 94 %
 Peak intensity 12 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

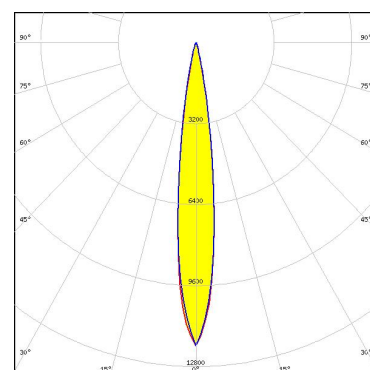


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Black Flat (LUW HWQP)
FWHM / FWTM 13.0° / 22.0°
Efficiency 94 %
Peak intensity 15.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

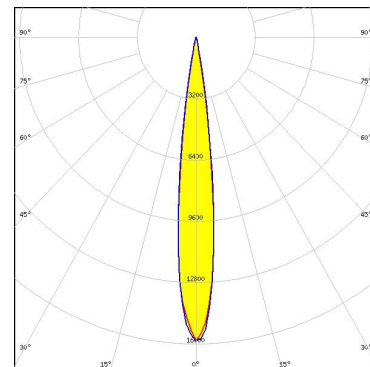

Light distribution files

OSRAM
Opto Semiconductors



LED OSLON SSL 150
FWHM / FWTM 14.0° / 26.0°
Efficiency 96 %
Peak intensity 13.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

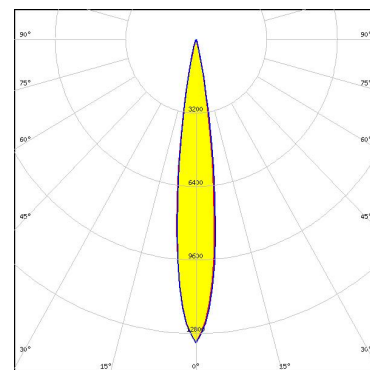

Light distribution files

OSRAM
Opto Semiconductors

LED SFH 4716AS
FWHM / FWTM 14.0° / 24.0°
Efficiency 96 %
LEDs/each optic 1
Light colour/type IR
Required components:

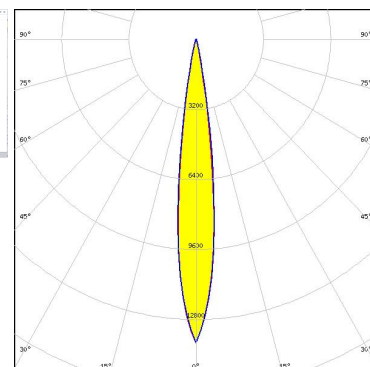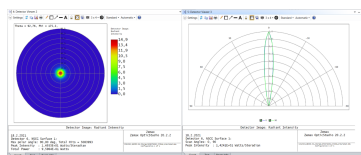


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG

| | |
|----------------------|---------------|
| LED | LH351D |
| FWHM / FWTM | 18.0° / 34.0° |
| Efficiency | 94 % |
| Peak intensity | 6.6 cd/lm |
| LEDs/each optic | 1 |
| Light colour/type | White |
| Required components: | |

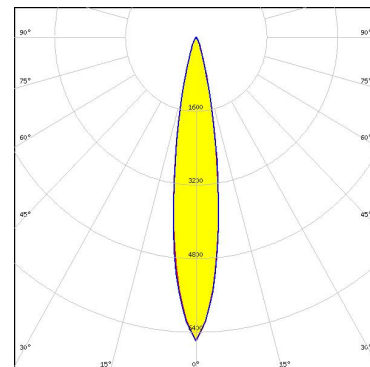

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)