

## HEIDI-W

~30° wide beam optimized for LUXEON Rebel ES

## SPECIFICATION:

Dimensions	Ø 21.6
Height	11.7 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ


## MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
HEIDI-W	Single lens	PMMA	clear		
HEIDI-TAPE	Tape	Acrylic foam	black		

## ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA12538_HEIDI-W	Single lens	3264	204	204	11.1
» Box size: 480 x 280 x 300 mm					




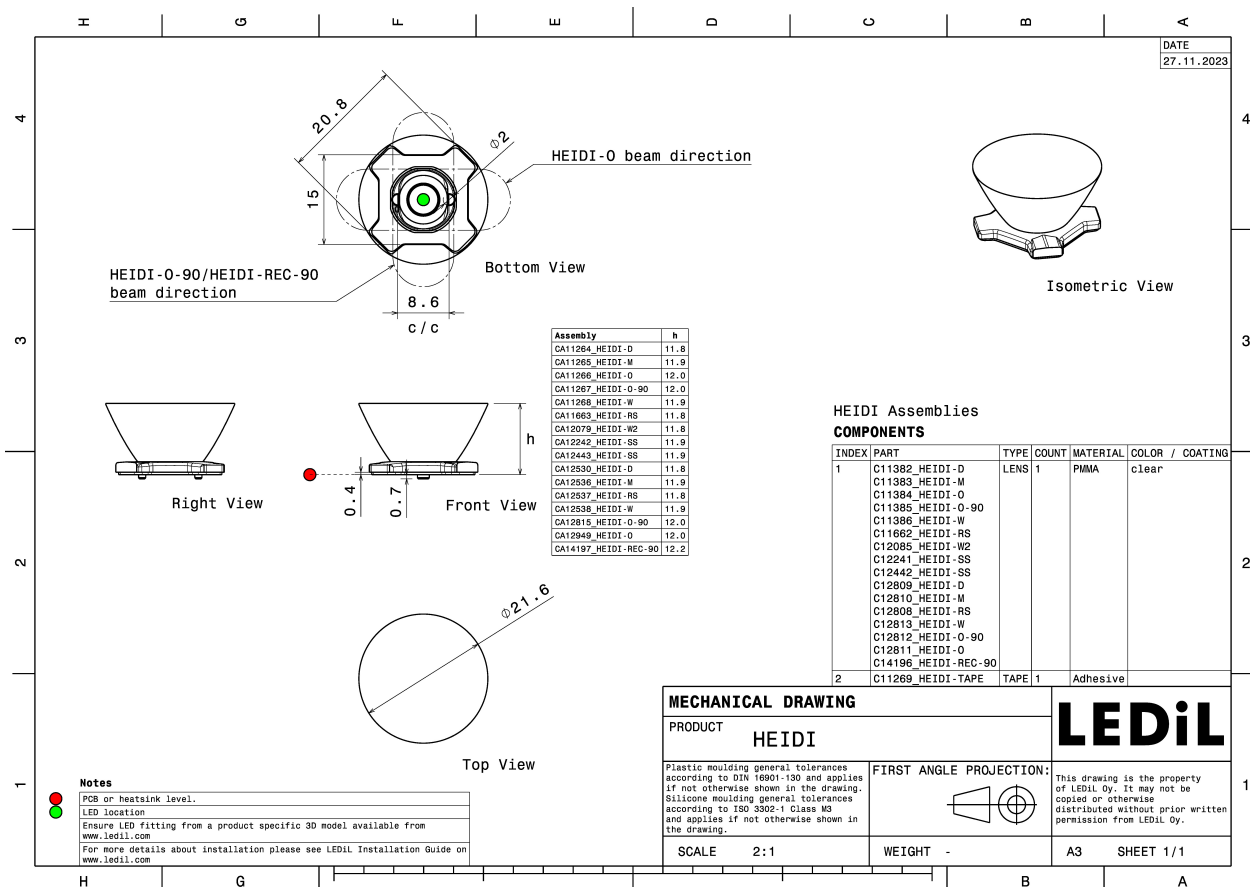


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

### OPTICAL RESULTS (MEASURED):





LED XHP35 HD  
FWHM / FWTM 32.0° / 62.0°  
Efficiency 84 %  
Peak intensity 2.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

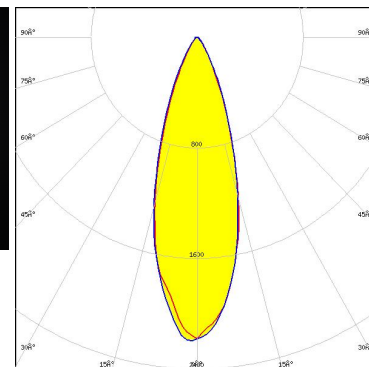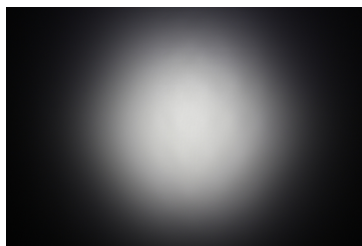

Light distribution files





LED XHP35 HI  
FWHM / FWTM 31.0° / 54.0°  
Efficiency 94 %  
Peak intensity 2.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

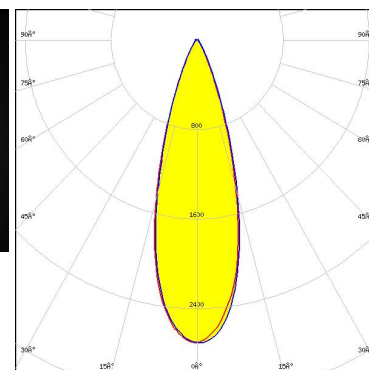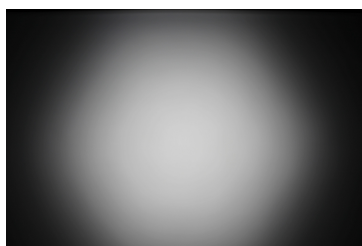

Light distribution files



LED XP-G3  
FWHM / FWTM 32.0° / 56.0°  
Efficiency 94 %  
Peak intensity 2.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

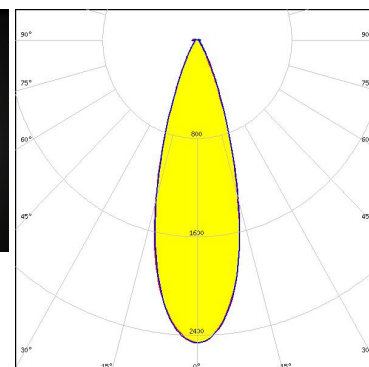
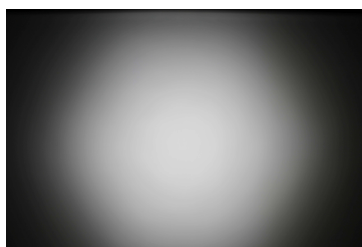


Light distribution files

### OPTICAL RESULTS (MEASURED):





LED XP-L HD  
FWHM / FWTM 33.0° / 57.0°  
Efficiency 87 %  
Peak intensity 2.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

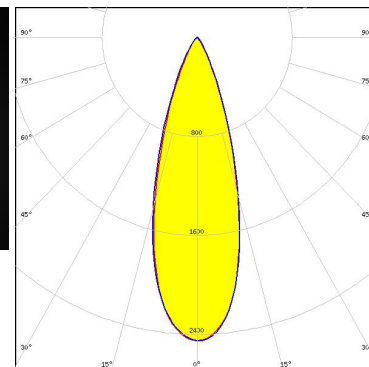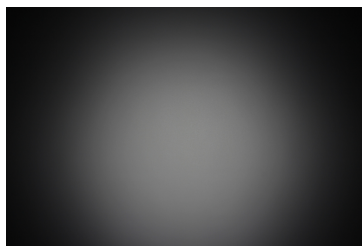

Light distribution files



LED LUXEON Rebel  
FWHM / FWTM 32.0° / 51.0°  
Efficiency 87 %  
Peak intensity 2.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

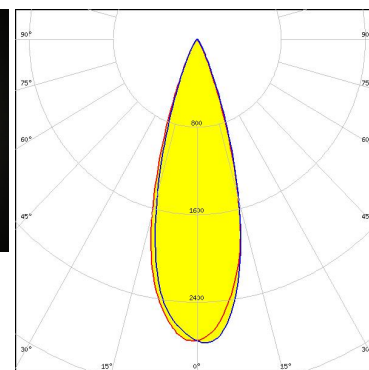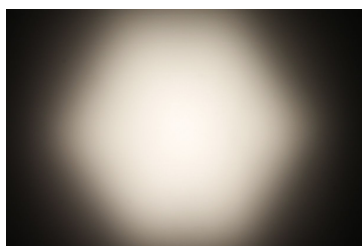

Light distribution files



LED LUXEON Rebel ES  
FWHM / FWTM 32.0° / 54.0°  
Efficiency 87 %  
Peak intensity 2.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:




Light distribution files



### OPTICAL RESULTS (MEASURED):





LED SST-10-B130  
FWHM / FWTM 33.0° / 51.0°  
Efficiency 93 %  
Peak intensity 2.8 cd/lm  
LEDs/each optic 1  
Light colour/type Blue  
Required components:

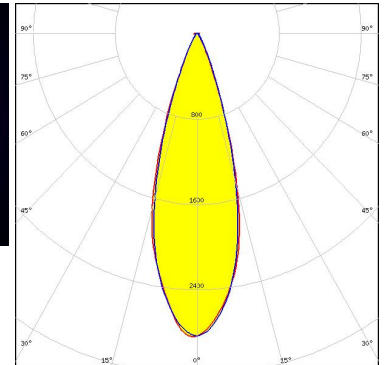

Light distribution files





LED NVSW219D  
FWHM / FWTM 32.0° / 54.0°  
Efficiency 94 %  
Peak intensity 2.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

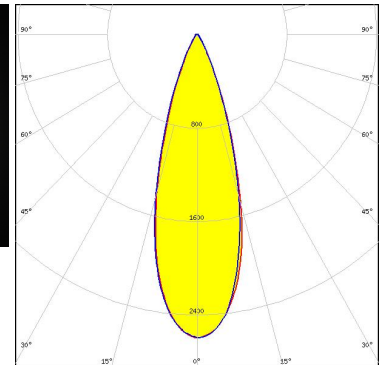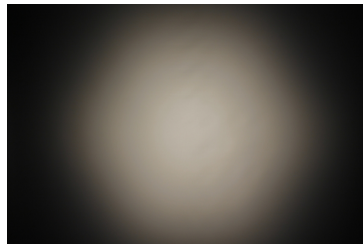

Light distribution files



LED NVSW319B  
FWHM / FWTM 32.0° / 56.0°  
Efficiency 94 %  
Peak intensity 2.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

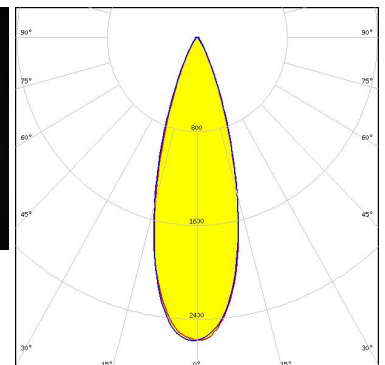
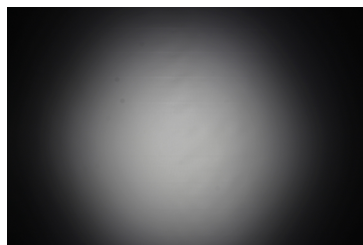


Light distribution files

### OPTICAL RESULTS (MEASURED):





LED NVSW3x9A  
FWHM / FWTM 31.0° / 55.0°  
Efficiency 90 %  
Peak intensity 2.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

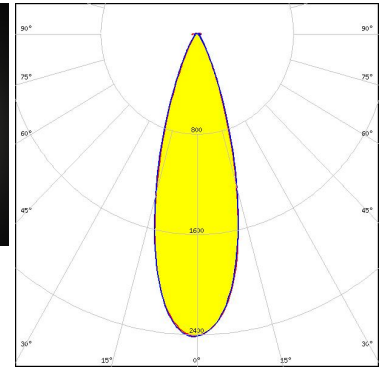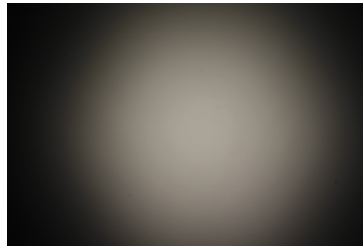

Light distribution files





LED NVSW519A  
FWHM / FWTM 32.0° / 59.0°  
Efficiency 91 %  
Peak intensity 2.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

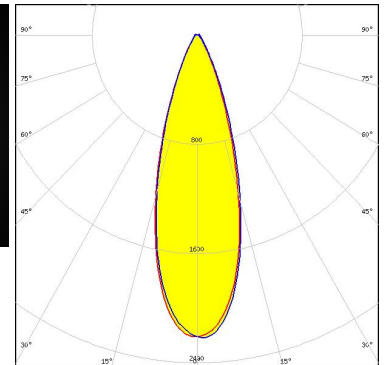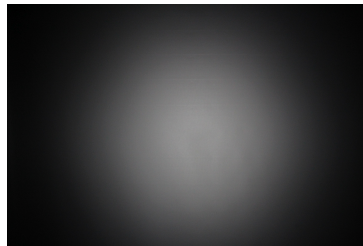

Light distribution files



LED NWSx229A  
FWHM / FWTM 31.0° / 57.0°  
Efficiency 83 %  
Peak intensity 2.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

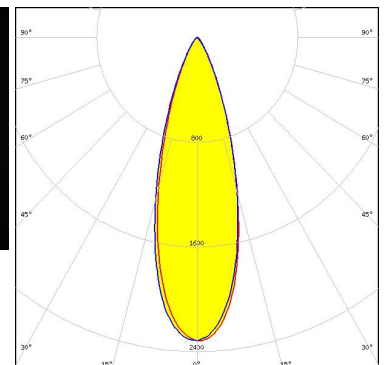
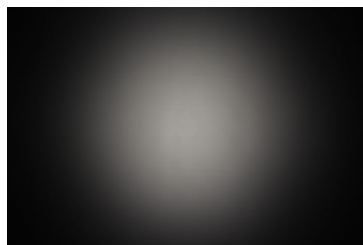


Light distribution files

#### OPTICAL RESULTS (MEASURED):

**OSRAM**  
Opto Semiconductors



LED OSLON SSL 150  
FWHM / FWTM 32.0° / 49.0°  
Efficiency 86 %  
Peak intensity 2.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

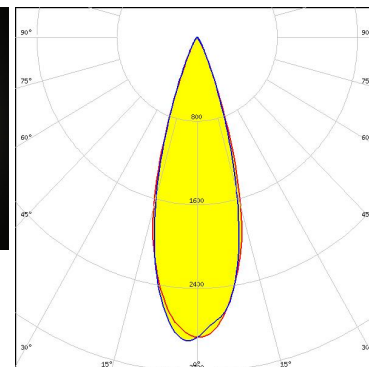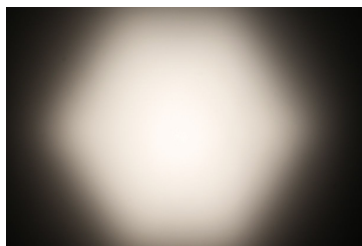

Light distribution files

**SEOL**  
SEOUL SEMICONDUCTOR



LED Z5M3  
FWHM / FWTM 32.0° / 56.0°  
Efficiency 94 %  
Peak intensity 2.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

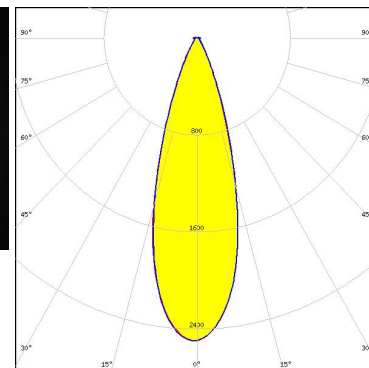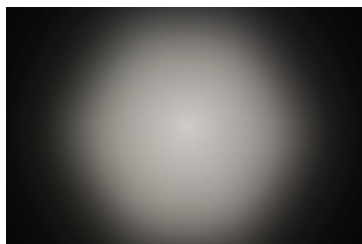

Light distribution files

**SEOL**  
SEOUL SEMICONDUCTOR

LED Z8Y22P  
FWHM / FWTM 31.0° / 55.0°  
Efficiency 92 %  
Peak intensity 2.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

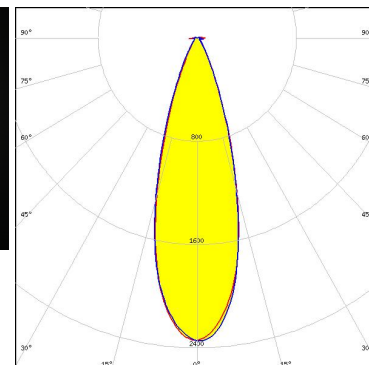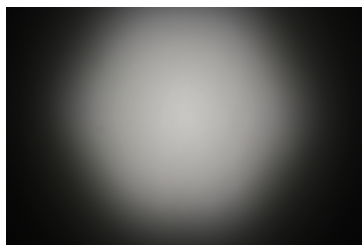


Light distribution files

### OPTICAL RESULTS (SIMULATED):




LED XP-G2 HE  
FWHM / FWTM 32.0° / 55.0°  
Efficiency 93 %  
Peak intensity 2.6 cd/Im  
LEDs/each optic 1  
Light colour/type White  
Required components:

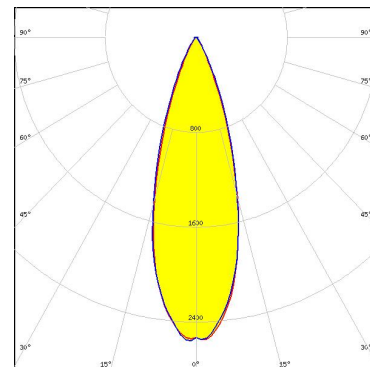

Light distribution files




LED XP-L2  
FWHM / FWTM 32.0° / 59.0°  
Efficiency 91 %  
Peak intensity 2.4 cd/Im  
LEDs/each optic 1  
Light colour/type White  
Required components:

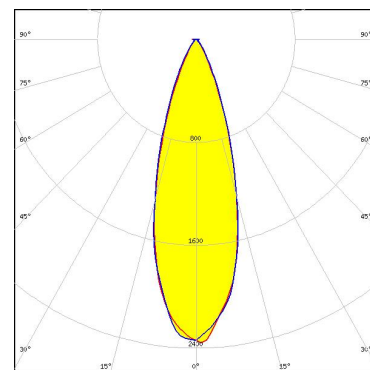

Light distribution files



LED XP-L2  
FWHM / FWTM 32.0° / 59.0°  
Efficiency 91 %  
Peak intensity 2.4 cd/Im  
LEDs/each optic 1  
Light colour/type White  
Required components:

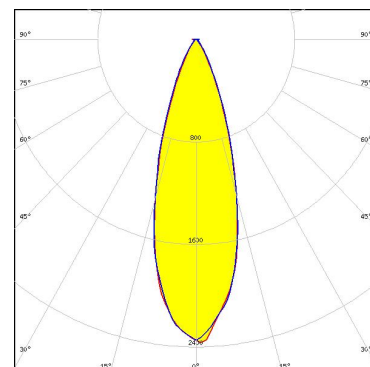

Light distribution files

## OPTICAL RESULTS (SIMULATED):




LED LUXEON A  
FWHM / FWTM 31.0°  
Efficiency %  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files



LED LUXEON HL2Z  
FWHM / FWTM 32.0° / 54.0°  
Efficiency 93 %  
Peak intensity 2.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

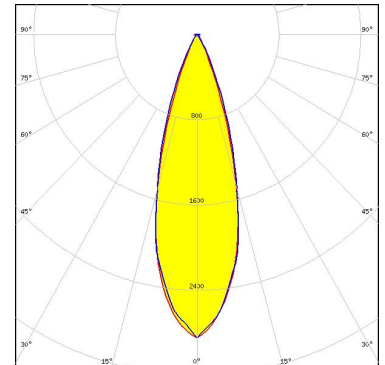

Light distribution files



LED LUXEON IR Domed 150 (L110-0xxx150000000)  
FWHM / FWTM 31.0° / 50.0°  
Efficiency 93 %  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files

### OPTICAL RESULTS (SIMULATED):



LED	LUXEON IR Domed 90 (L110-0xxx090000000)
FWHM / FWTM	31.0° / 52.0°
Efficiency	94 %
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files




LED	LUXEON R
FWHM / FWTM	32.0°
Efficiency	%
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files



LED	LUXEON SunPlus 20 Line (120 deg)
FWHM / FWTM	31.0° / 52.0°
Efficiency	95 %
Peak intensity	3.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

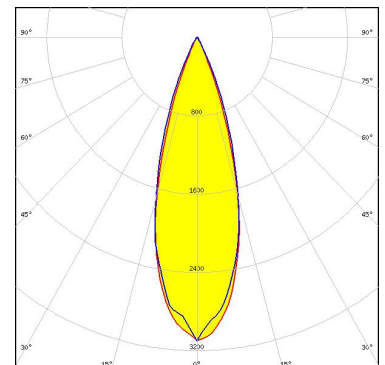


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON SunPlus 20 Line (150 deg)  
 FWHM / FWTM 31.0° / 51.0°  
 Efficiency 92 %  
 Peak intensity 2.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

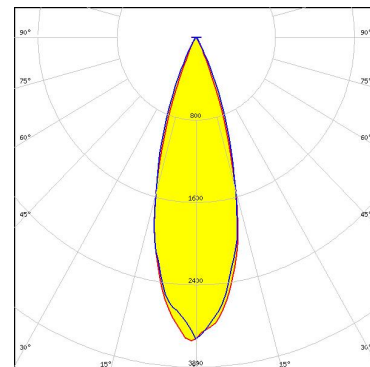

Light distribution files




LED LUXEON SunPlus 20 Line (150 deg)  
 FWHM / FWTM 31.0° / 52.0°  
 Efficiency 91 %  
 Peak intensity 2.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

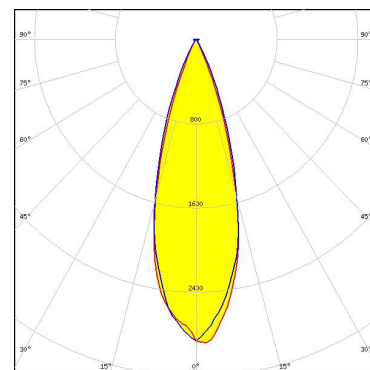

Light distribution files



LED LUXEON SunPlus 35 Line  
 FWHM / FWTM 31.0° / 51.0°  
 Efficiency 94 %  
 Peak intensity 3.1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

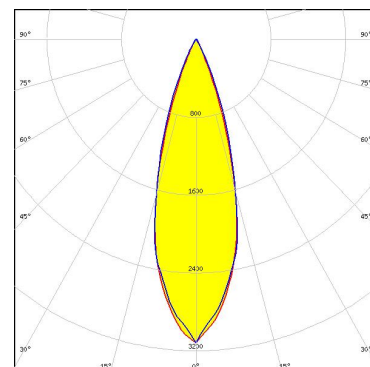



Light distribution files



### OPTICAL RESULTS (SIMULATED):




LED SST-10-B130  
FWHM / FWTM 30.0° / 53.0°  
Efficiency 95 %  
LEDs/each optic 1  
Light colour/type IR  
Required components:

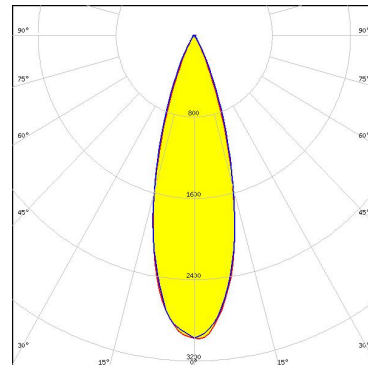

Light distribution files




LED NV4WB35AM  
FWHM / FWTM 32.0° / 57.0°  
Efficiency 92 %  
Peak intensity 2.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

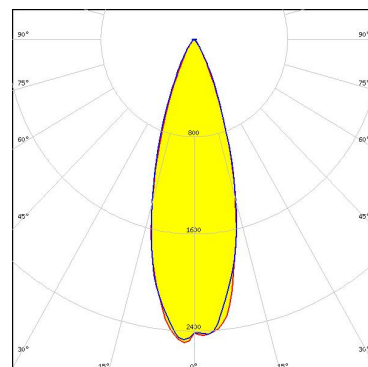

Light distribution files



LED NVSxE21A  
FWHM / FWTM 31.0° / 53.0°  
Efficiency 93 %  
Peak intensity 2.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

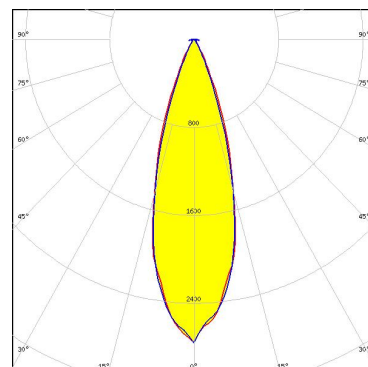


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ P 3737 Flat  
FWHM / FWTM 32.0° / 55.0°  
Efficiency 95 %  
Peak intensity 2.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

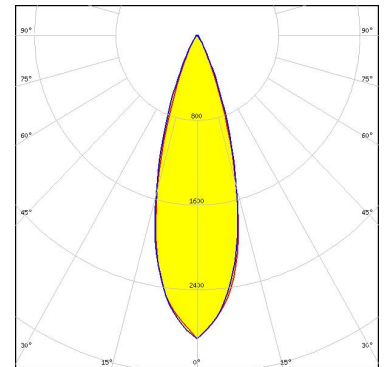

Light distribution files

**OSRAM**  
Opto Semiconductors



LED OSLO Pure 1414  
FWHM / FWTM 31.0 + 32.0° / 46.0 + 52.0°  
Efficiency 96 %  
Peak intensity 3.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

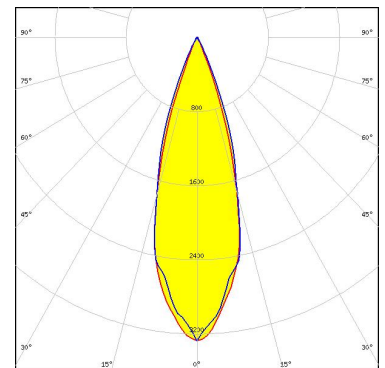

Light distribution files

**OSRAM**  
Opto Semiconductors

LED SFH 4715AS  
FWHM / FWTM 30.0° / 52.0°  
Efficiency 95 %  
LEDs/each optic 1  
Light colour/type IR  
Required components:

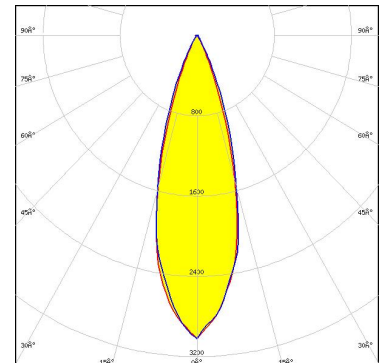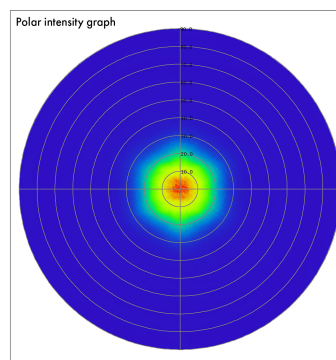

Light distribution files

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 7  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)