

HB-2X2-RS-PC

~10° spot beam. Variant made from PC.

SPECIFICATION:

Dimensions	50.0 x 50.0
Height	10 mm
Fastening	pin, screw
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
HB-2X2-RS-PC	Multi-lens	PC	clear		



ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C14729_HB-2X2-RS-PC » Box size: 480 x 280 x 300 mm	800	160	160	10.3

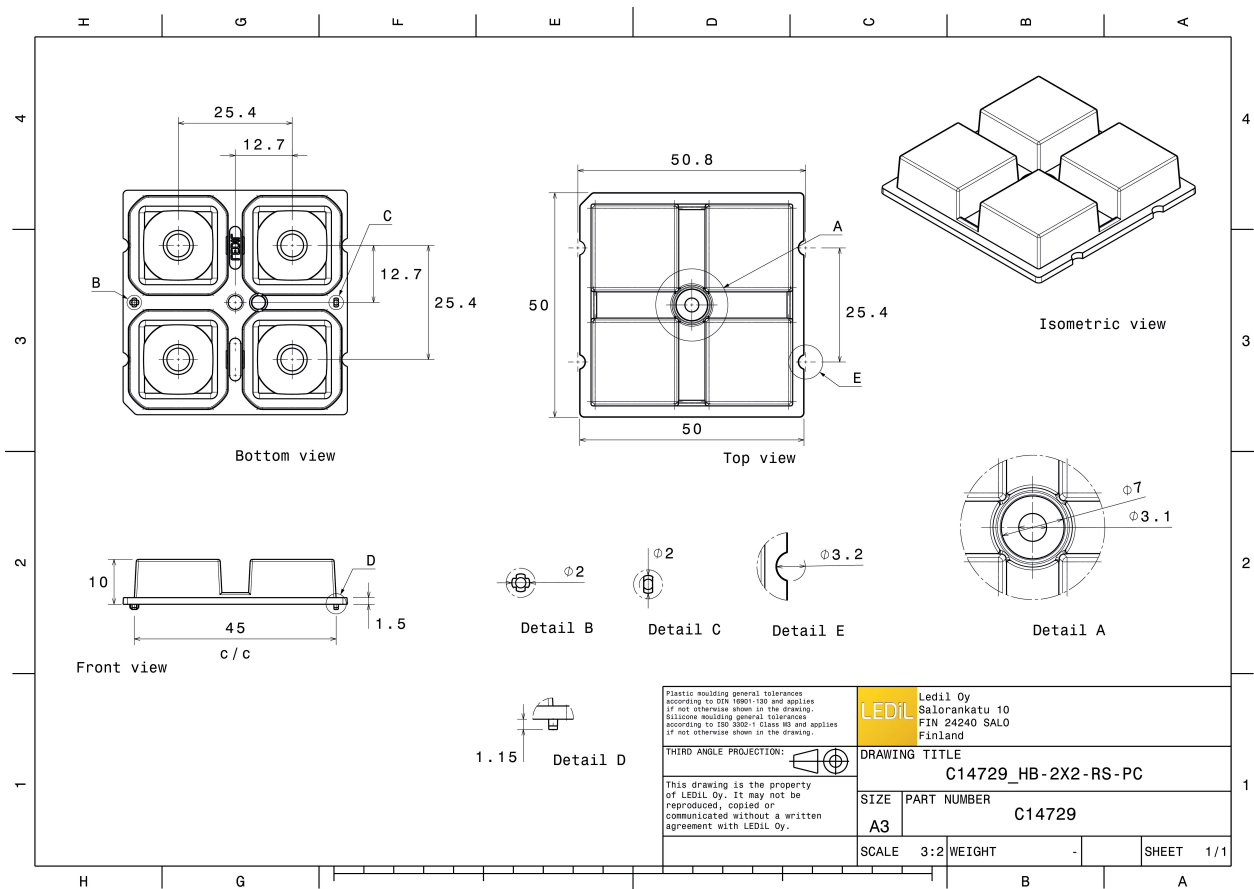


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED XP-G2
FWHM / FWTM 14.0° / 24.0°
Efficiency 91 %
Peak intensity 11 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

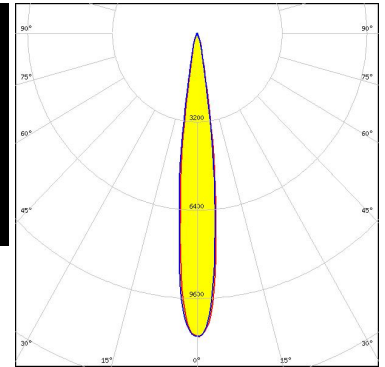

Light distribution files





LED PL-BRICK HP 3800 2x8 SSG
FWHM / FWTM 16.0° / 28.0°
Efficiency 90 %
Peak intensity 8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

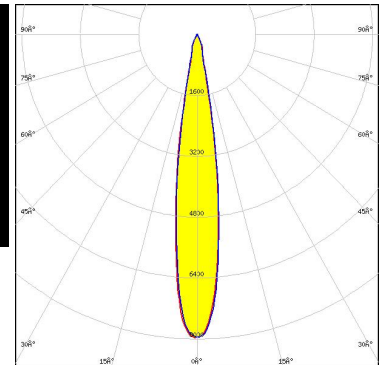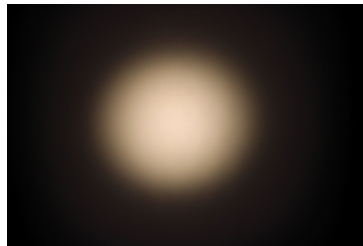

Light distribution files



LED RecLED 122x50mm 1900lm 730 2x4 Opt G1
FWHM / FWTM 13.0° / 25.0°
Efficiency 91 %
Peak intensity 10.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

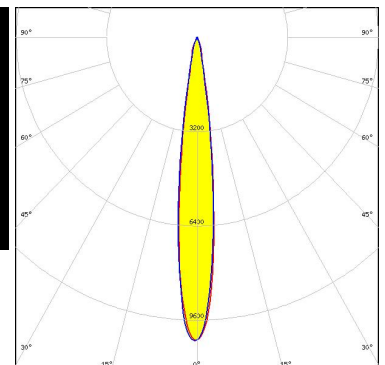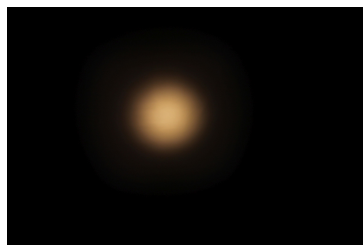


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G3
 FWHM / FWTM 16.0° / 34.0°
 Efficiency 88 %
 Peak intensity 6.6 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

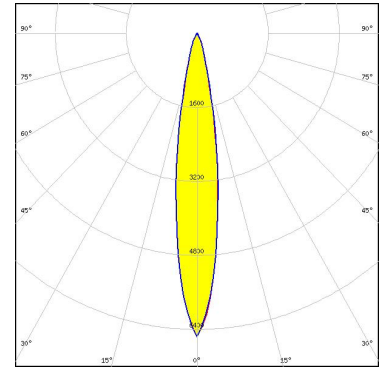

Light distribution files




LED XP-L2
 FWHM / FWTM 20.0° / 40.0°
 Efficiency 86 %
 Peak intensity 4.4 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

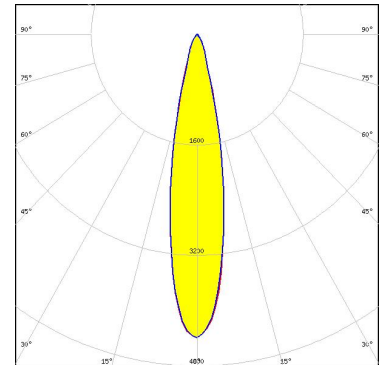

Light distribution files



LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)
 FWHM / FWTM 18.0° / 36.0°
 Efficiency 81 %
 Peak intensity 5.5 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

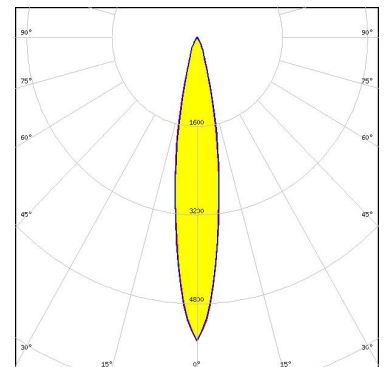


Protective plate, glass

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED	LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)
FWHM / FWTM	16.0° / 35.0°
Efficiency	89 %
Peak intensity	6.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

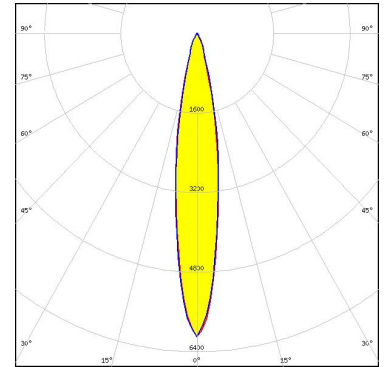

Light distribution files




LED	NVSW219F
FWHM / FWTM	14.0° / 30.0°
Efficiency	88 %
Peak intensity	7.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

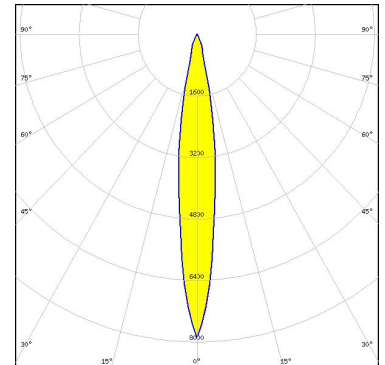

Light distribution files



LED	OSCONIQ C 2424
FWHM / FWTM	12.0° / 22.0°
Efficiency	89 %
Peak intensity	14.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

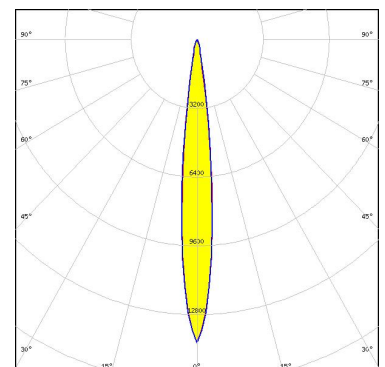


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 13.0° / 26.0°
Efficiency 91 %
Peak intensity 10.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

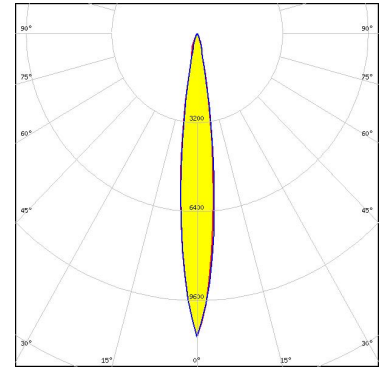

Light distribution files

SAMSUNG


LED LH351C
FWHM / FWTM 15.0° / 32.0°
Efficiency 88 %
Peak intensity 7.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

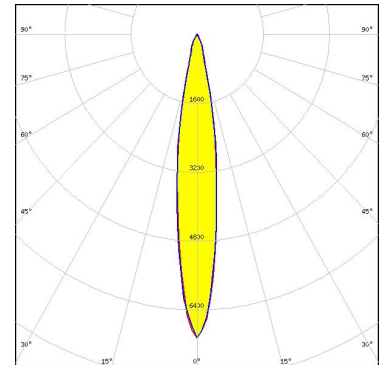

Light distribution files



SAMSUNG

LED LH351D
FWHM / FWTM 20.0° / 40.0°
Efficiency 88 %
Peak intensity 4.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

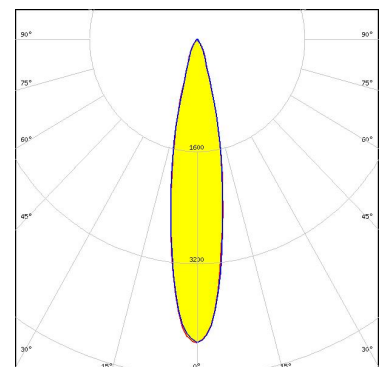

Light distribution files


OPTICAL RESULTS (SIMULATED):

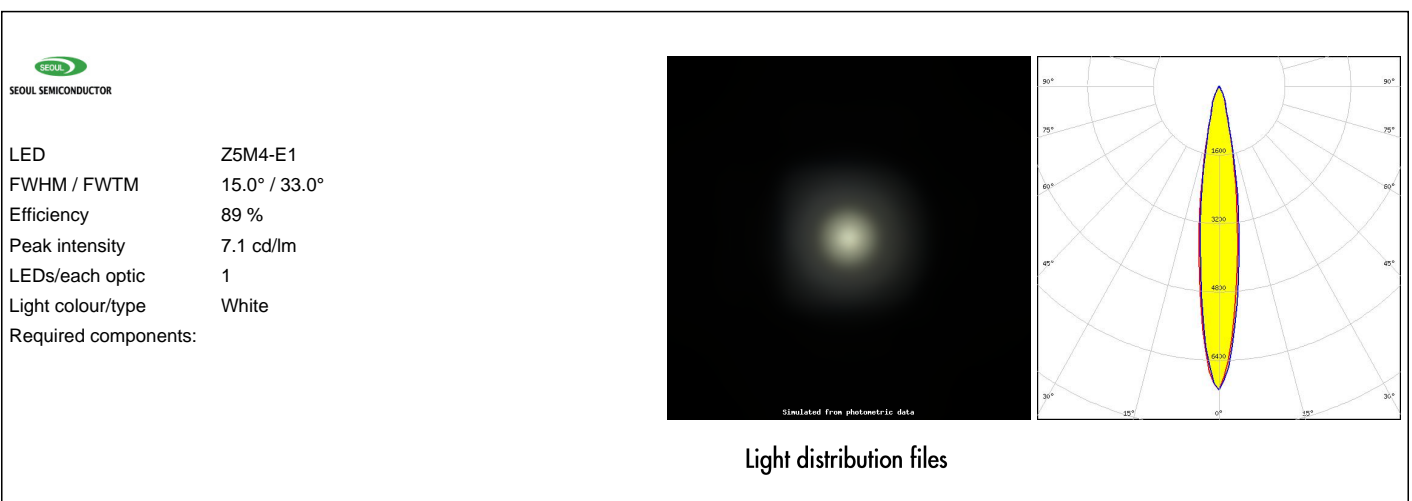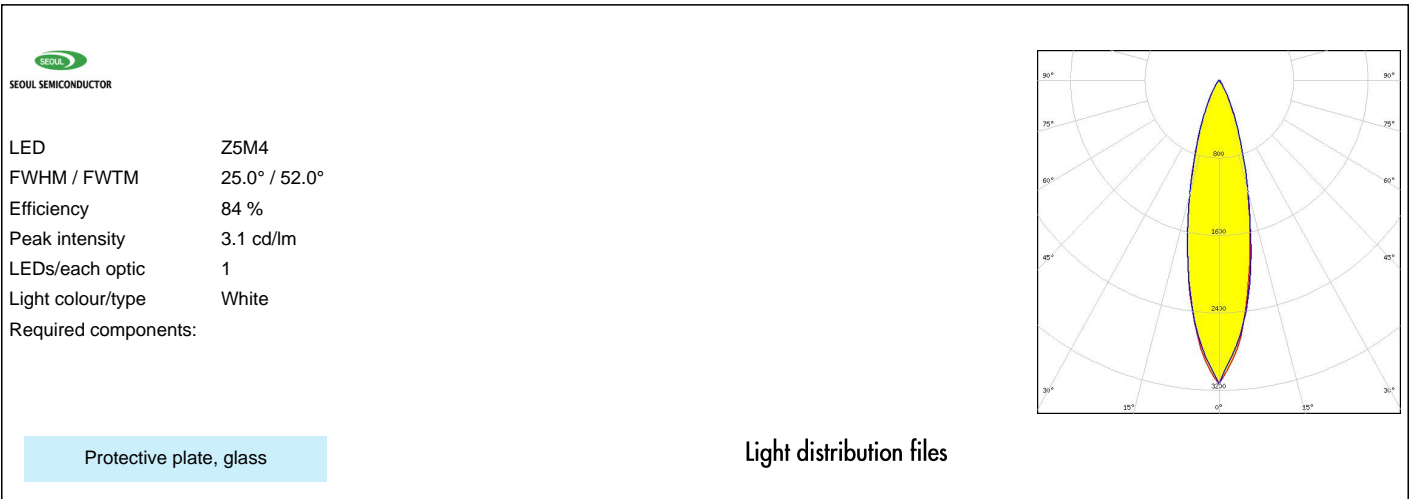

OPTICAL RESULTS (SIMULATED):




LED Z5M4-E2
 FWHM / FWTM 16.0° / 36.0 + 37.0°
 Efficiency 89 %
 Peak intensity 6.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

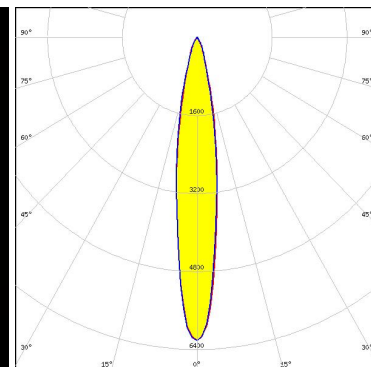

Light distribution files

TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD
 FWHM / FWTM 13.0° / 26.0°
 Efficiency 90 %
 Peak intensity 10.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

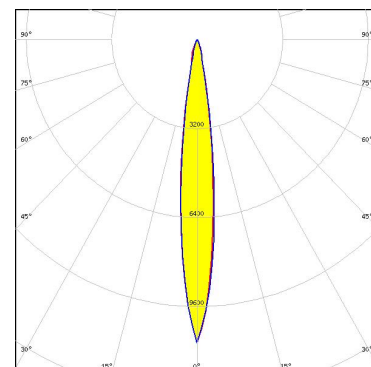

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)