



Recommended to use scissors when dividing to smaller units.

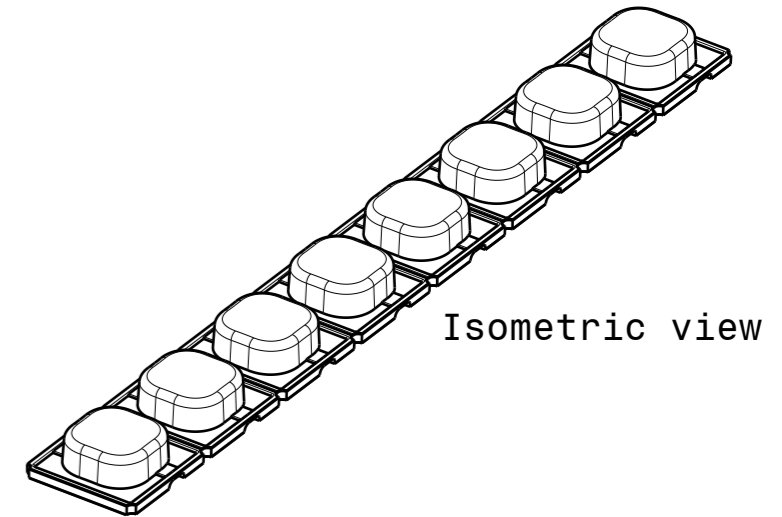

When thermal adhesive tape is used, recommended tape thickness up to 0.3mm. When assembling led ensure correct position in relation to lens position pin hole.

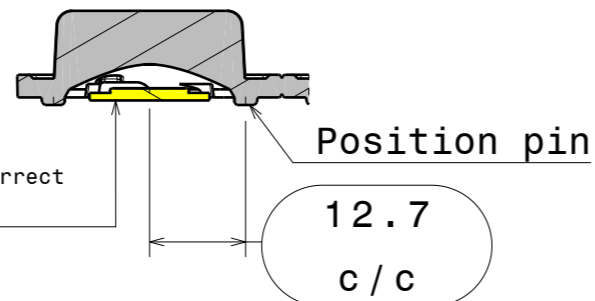

Section view B-B  
Scale: 1:1

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	F14325	JENNY-8X1-CY	Optical grade silicon	

Tolerances if not otherwise shown  
According to DIN ISO 2768-1  
Linear measures: class V  
Please note that due to the elasticity of products made of silicone actual measured values may vary, and therefore typical tolerance values may not be applied.

**LEDiL** LediL Oy  
Salorankatu 10  
FIN 24240 SALO  
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE  
**F14325\_JENNY-8X1-CY**

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SIZE PART NUMBER  
**A3 F14325**

SCALE 1:1 WEIGHT SHEET 1/1