




Top view

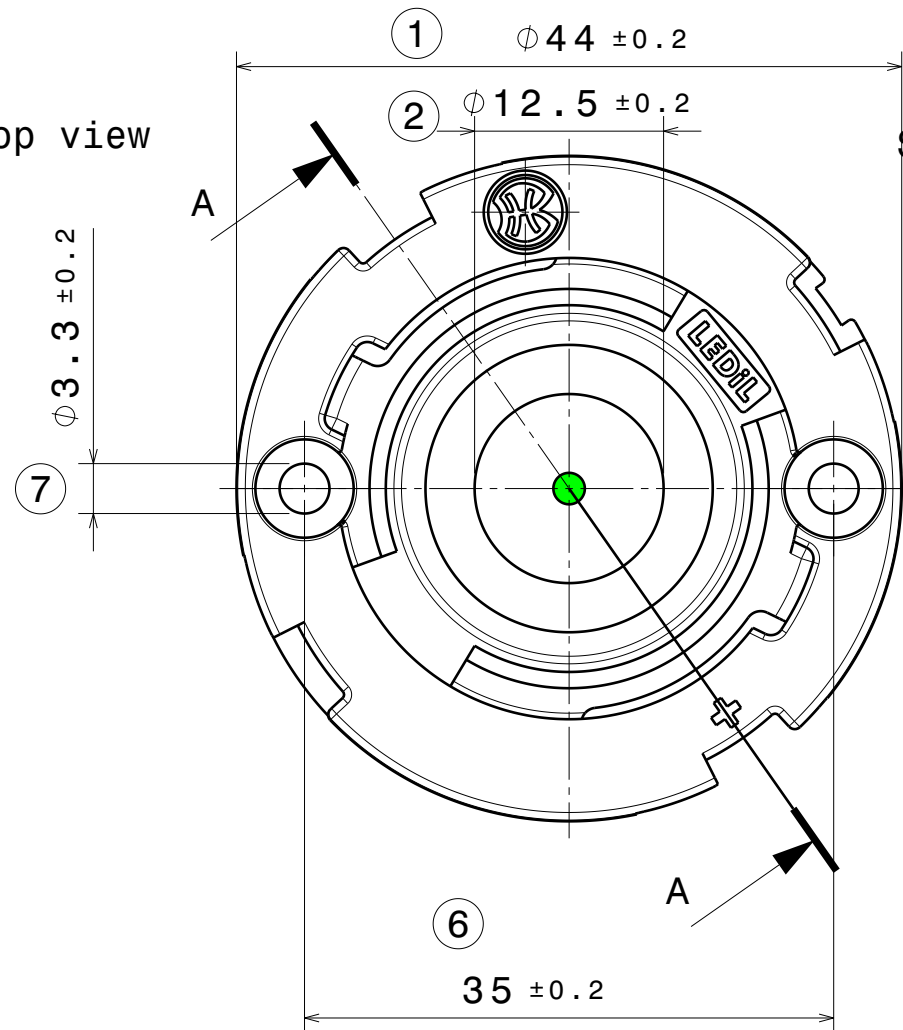


Section view A-A

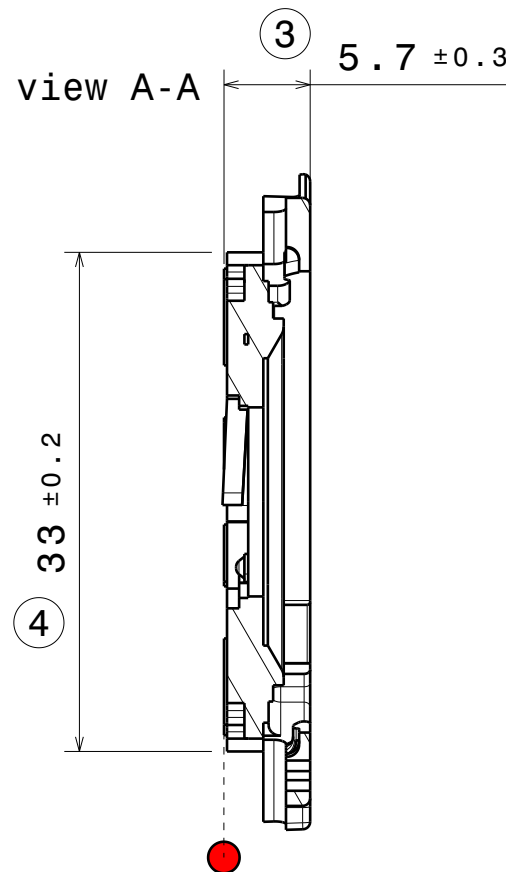

Bottom view

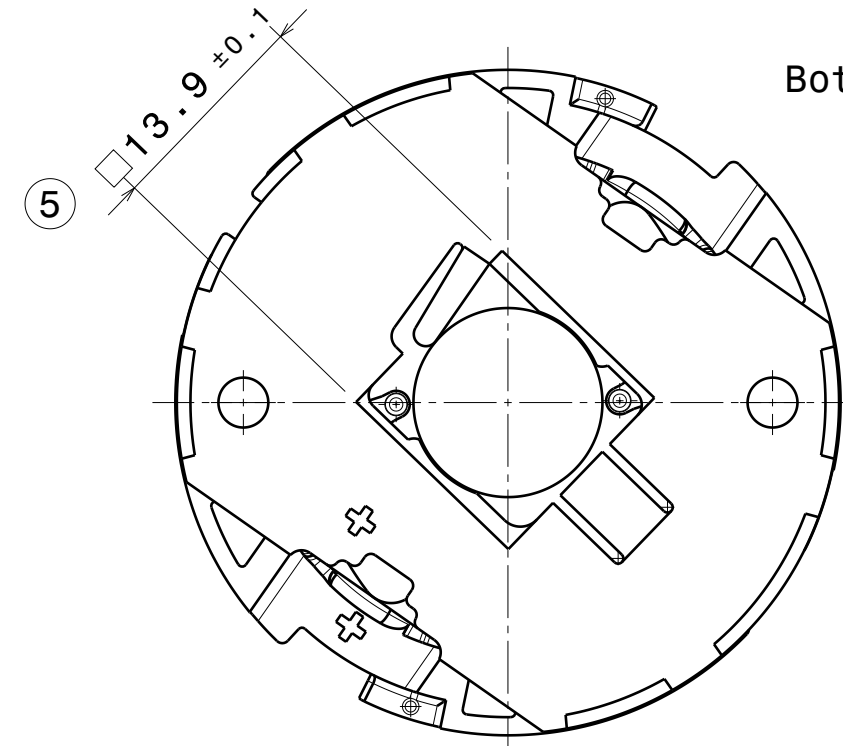


L20740_KONNTAKT-1 (2x)
Connection element to be ordered separately

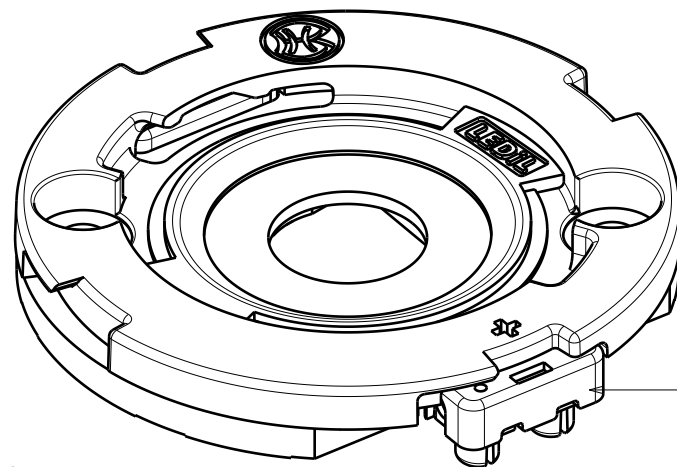


Isometric view

Mounting hole pattern

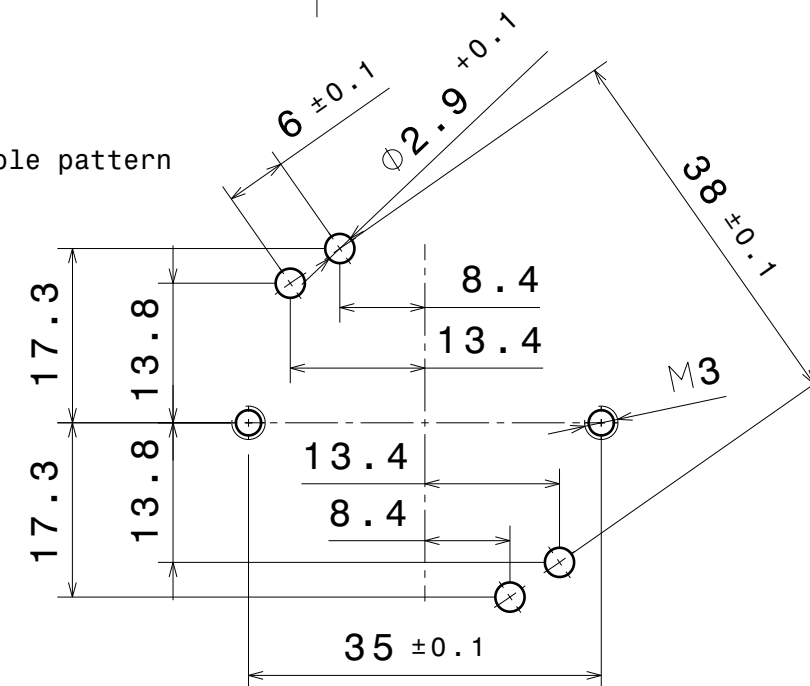

PART	TYPE	MATERIAL	COLOR	COB SIZE (mm)	LES (up to)
L20675_HEKLA-KONNTAKT-C	Solderless connector	PBT	White	13,5 x 13,5	12mm

MECHANICAL DRAWING		LEDiL
PRODUCT HEKLA KONNTAKT		
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 2:1	WEIGHT 6,15 g	A3 SHEET 1/1

Notes

●	PCB or heatsink level.
●	LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com	
For more details about installation please see LEDiL Installation Guide on www.ledil.com	

