



D

C


B

A

REV	DATE
001	04.03.2026

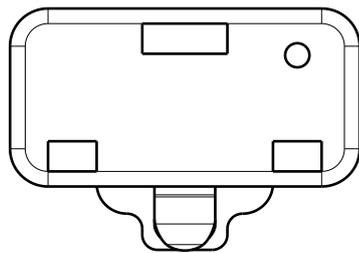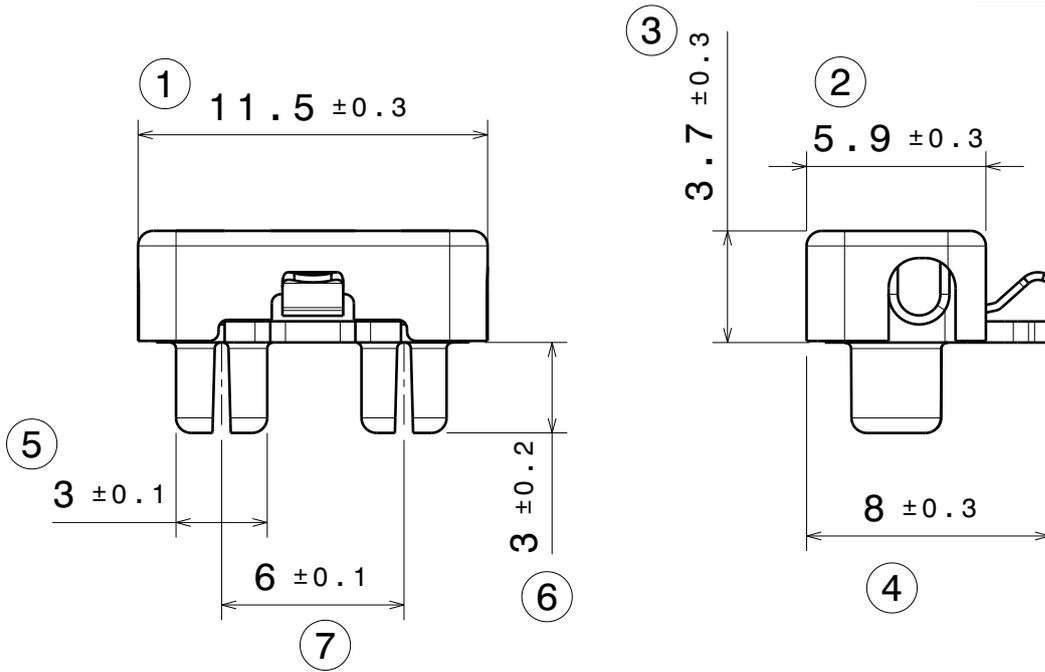

push-in terminal for  
stranded tinned wires  
0,35mm<sup>2</sup>/0,5mm<sup>2</sup>/0,75mm<sup>2</sup>  
(AWG22/AWG20/AWG18)  
solid wires 0,5mm<sup>2</sup> (AWG20)

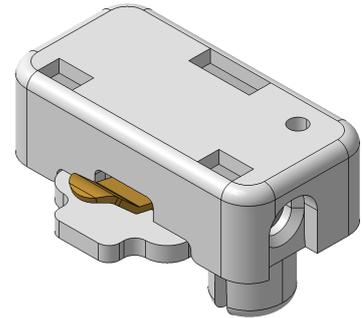

use only from one side

PART	MATERIAL	COLOR / COATING
L20740_KONNTAKT-1	PBT	White

## MECHANICAL DRAWING


PRODUCT

KONNTAKT

# LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 4:1

WEIGHT 0,34 g

A4 SHEET 1/1

D

A