


L20740\_KONNTAKT-1 (2x)  
Connection element to be ordered separately

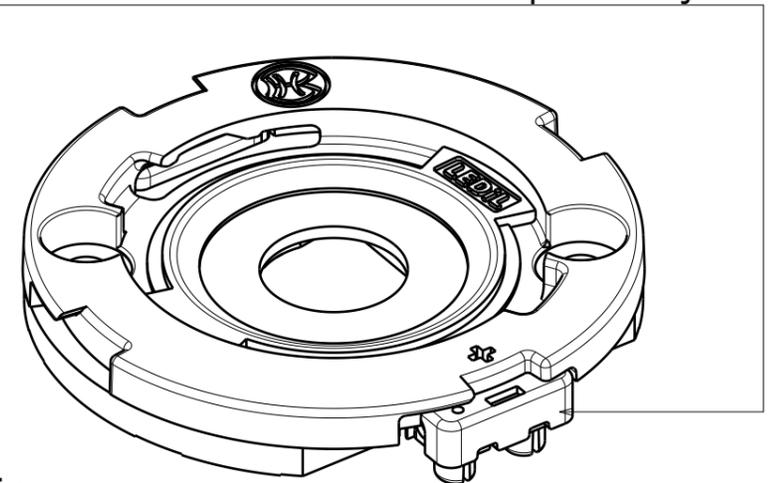

Isometric view

PART	TYPE	MATERIAL	COLOR	COB SIZE (mm)	LES (up to)
L20758_HEKLA-KONNTAKT-C2	Solderless connector	PBT	White	13,5 x 13,5	12mm


**MECHANICAL DRAWING**

PRODUCT **HEKLA KONNTAKT**



Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE	2:1	WEIGHT	6,15 g	A3	SHEET 1/1
-------	-----	--------	--------	----	-----------




**Notes**

	PCB or heatsink level.
	LED location
	Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
	For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>

GENERAL INFORMATION	
RATED VOLTAGE/CURRENT	VDE 80VDC/3A UL 60VDC/100W
ELECTRICAL REQUIREMENTS	IEC 60838-1
WIRES FOR PUSH-IN TERMINALS	STRANDED TINNED WIRES (0,35mm <sup>2</sup> - 0,75mm <sup>2</sup> ) AWG18-22 SOLID WIRES (0,5mm <sup>2</sup> ) AWG20
WIRE STRIP LENGTH	7 +1 mm
FASTENING	SCREWS 2XM3, Screw hole distance 35mm
MAX. SCREW FIXING TORQUE	0,5Nm
MAX. TIM THICKNESS	0,25mm, recommended to use without
RATED TEMPERATURE	120°C

REV	DATE
001	24.03.2026

GENERAL ASSEMBLY INSTRUCTION

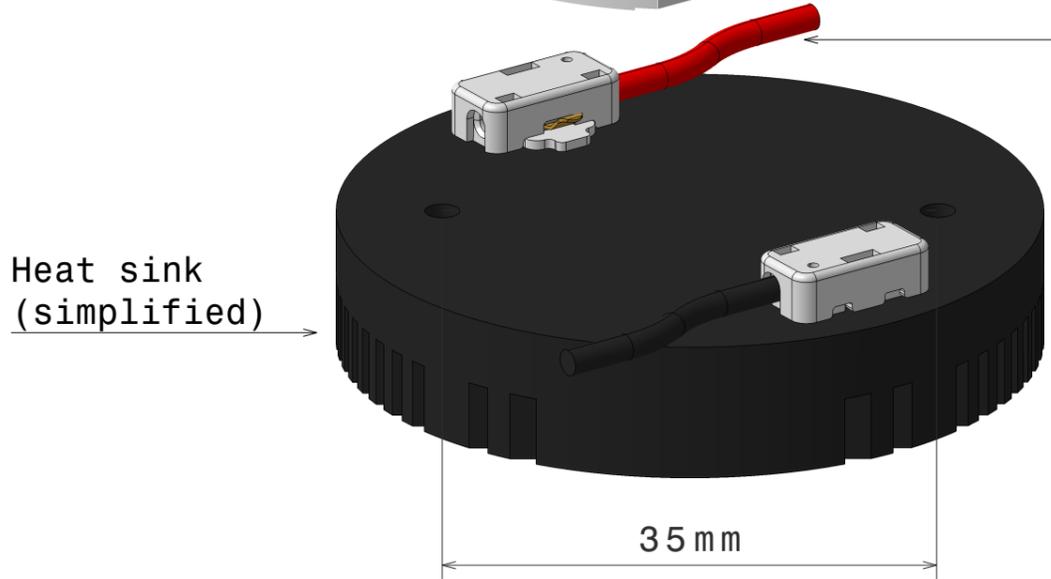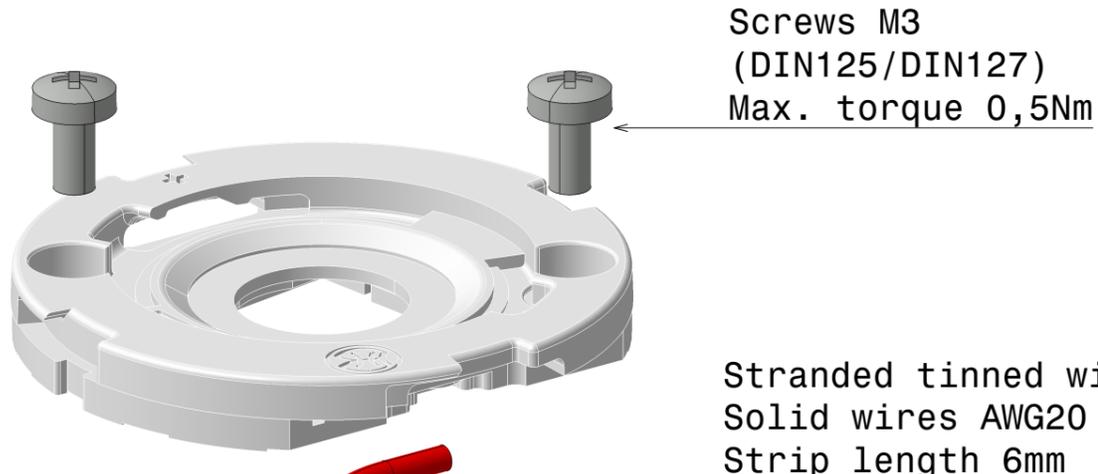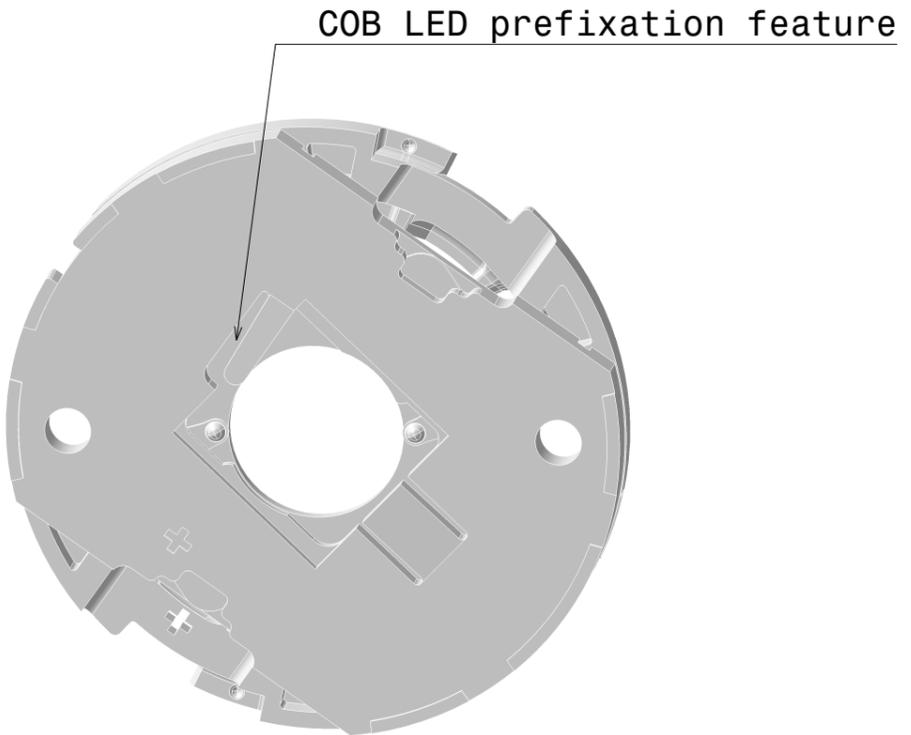

After wire installation, we recommend using a strain relief mechanism during the luminaire assembly to avoid any stress on the wires which may result in a loose connection.  
Contact springs must not be subject to any excess force from the wires after the final assembly.

PART	TYPE	MATERIAL	COLOR	COB SIZE (mm)	LES (up to)
L20758_HEKLA-KONNTAKT-C2	Solderless connector	PBT	White	13,5 x 13,5	12mm

<b>MECHANICAL DRAWING</b>	
PRODUCT	<b>HEKLA KONNTAKT</b>
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 
SCALE 2:1	WEIGHT 6,15 g

**LEDiL**

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

A3 SHEET 1/1

**Notes**

	PCB or heatsink level.
	LED location
	Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
	For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>