

DATE
30.10.2023

Oval beam direction

Ø 2.6

Bottom view

8.6

7.5

1.9

Front view


9.9

9.9

Top view

11.2

- Notes**
- PCB or heatsink level.
 - LED location
 - Ensure LED fitting from a product specific 3D model available from www.ledil.com
 - For more details about installation please see LEDiL Installation Guide on www.ledil.com

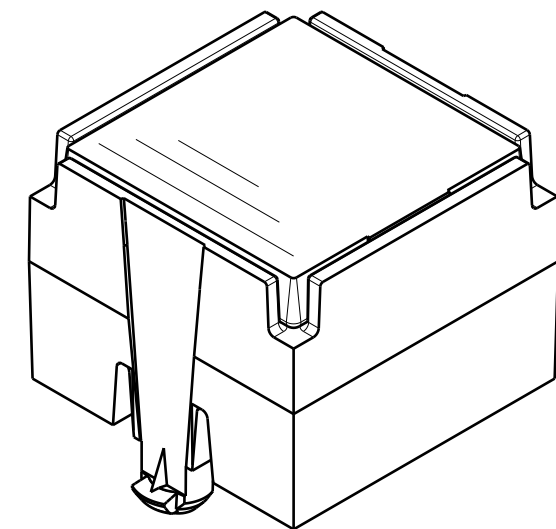

Isometric view

CP18225_LARISA-0-90-CLIP8
COMPONENTS

INDEX	PART	TYPE	MATERIAL	COLOR / COATING
1	C12907_LARISA-HOLDER-CLIP8	HOLDER	PC	black
2	C12911_LARISA-0	LENS	PMMA	clear


MECHANICAL DRAWING

PRODUCT **LARISA**

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

SCALE 5:1

FIRST ANGLE PROJECTION:

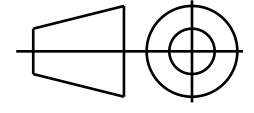

WEIGHT -

LEDiL®

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

A3 SHEET 1 / 1