

LXP2-RS

~9.6° spot beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.

SPECIFICATION:

Dimensions	Ø 21.6
Height	14.7 mm
Fastening	tape
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
LXP2-RS	Single lens	PMMA	clear		
LXP2-LH1-TAPE-BLK	Holder	PC	black		
HEIDI-TAPE	Tape	Acrylic foam tape	black		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA11481_LXP2-RS » Box size: 480 x 280 x 300 mm	1680	336	112	9.5

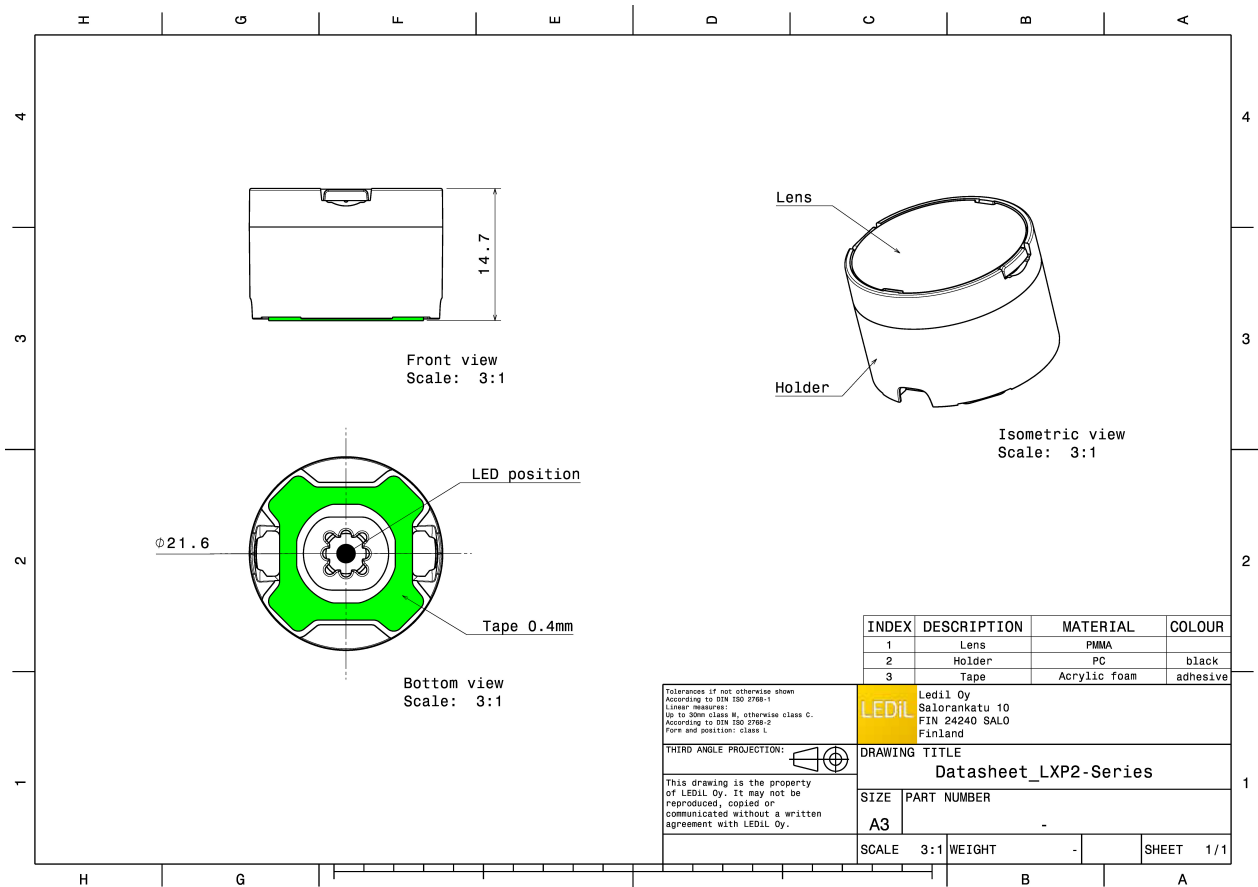


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED XP-E
FWHM / FWTM 7.0°
Efficiency 94 %
LEDs/each optic 1
Light colour/type White
Required components:

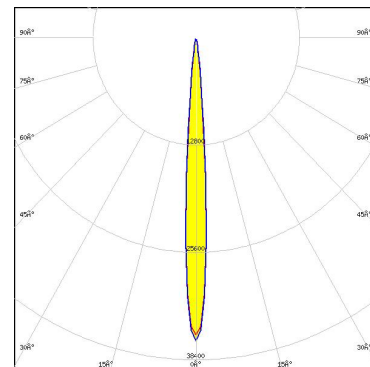

Light distribution files




LED XP-E2
FWHM / FWTM 8.0° / 14.0°
Efficiency 90 %
Peak intensity 44 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

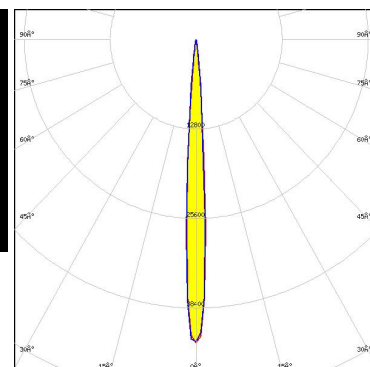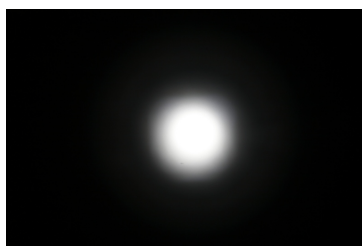

Light distribution files



LED XP-G
FWHM / FWTM 10.0°
Efficiency 94 %
LEDs/each optic 1
Light colour/type White
Required components:

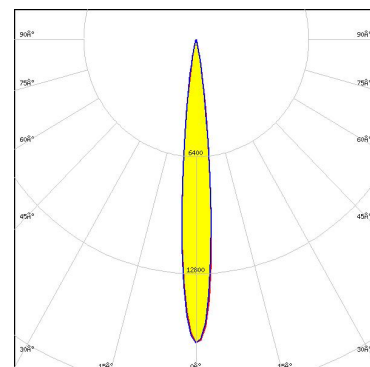


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XP-G2
FWHM / FWTM 10.0° / 19.0°
Efficiency 94 %
Peak intensity 21 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

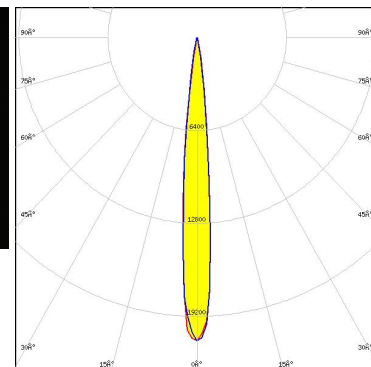

Light distribution files




LED XP-L HI
FWHM / FWTM 10.0° / 20.0°
Efficiency 89 %
Peak intensity 20 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

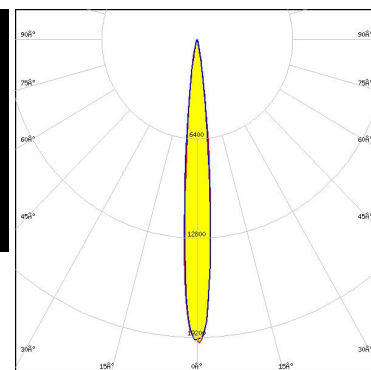

Light distribution files



LED NCSxx19A
FWHM / FWTM 8.0° / 18.0°
Efficiency 86 %
Peak intensity 26.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


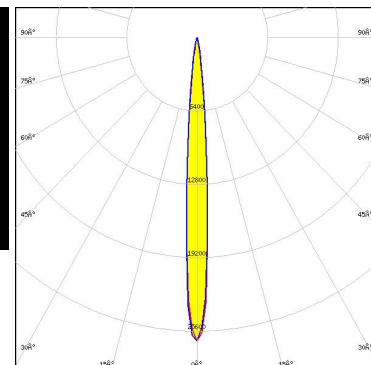


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NVSW219D
 FWHM / FWTM 12.0° / 23.0°
 Efficiency 92 %
 Peak intensity 14.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

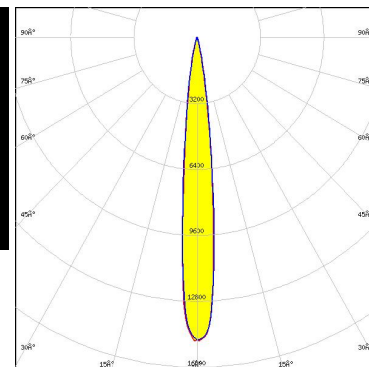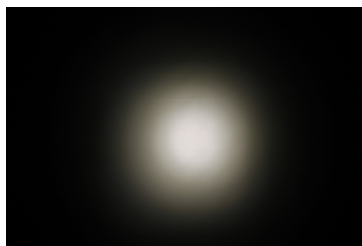

Light distribution files




LED NVSW3x9A
 FWHM / FWTM 12.0° / 28.0°
 Efficiency 83 %
 Peak intensity 10.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

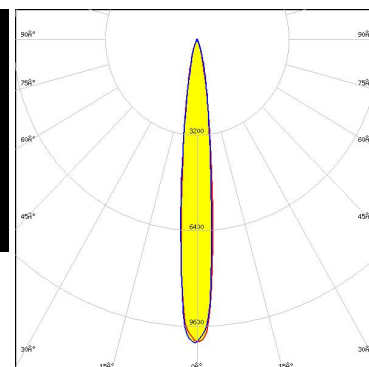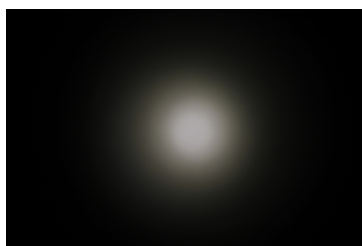

Light distribution files



LED NVSxx19B/NVSxx19C
 FWHM / FWTM 11.0° / 25.0°
 Efficiency 89 %
 Peak intensity 13.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

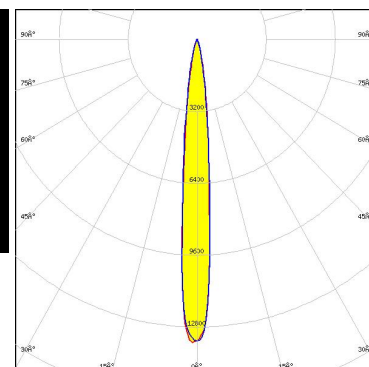


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP35.2 HD
FWHM / FWTM 18.0° / 36.0°
Efficiency 74 %
Peak intensity 5.6 cd/Im
LEDs/each optic 1
Light colour/type White
Required components:

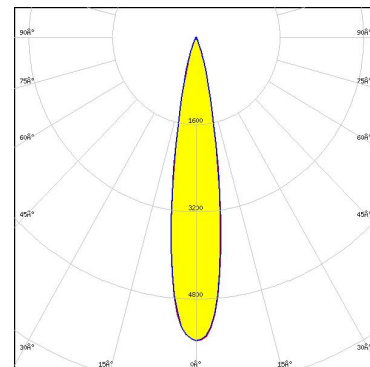

Light distribution files




LED XHP35.2 HI
FWHM / FWTM 12.0° / 28.0°
Efficiency 81 %
Peak intensity 10.5 cd/Im
LEDs/each optic 1
Light colour/type White
Required components:

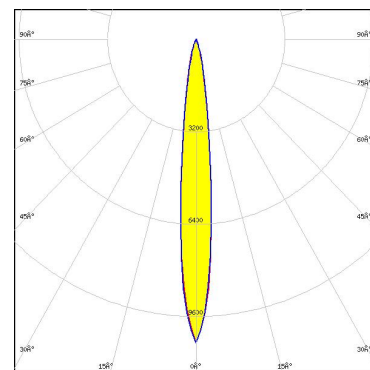

Light distribution files



LED XP-E
FWHM / FWTM 8.0° / 16.0°
Efficiency 91 %
Peak intensity 37.7 cd/Im
LEDs/each optic 1
Light colour/type White
Required components:

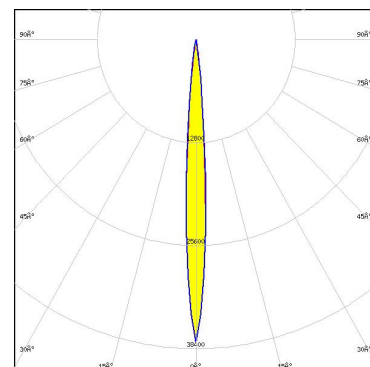


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G4
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 93 %
 Peak intensity 20.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

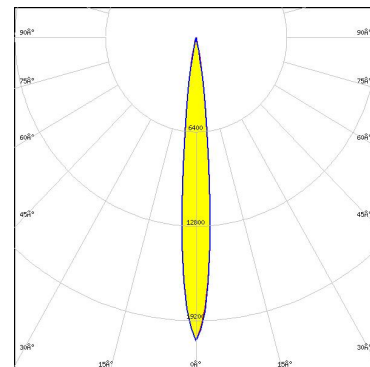

Light distribution files




LED XP-L2
 FWHM / FWTM 16.0° / 30.0°
 Efficiency 83 %
 Peak intensity 8.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

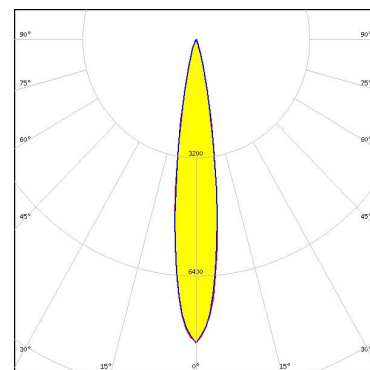

Light distribution files



LED XP-P
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 92 %
 Peak intensity 50.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

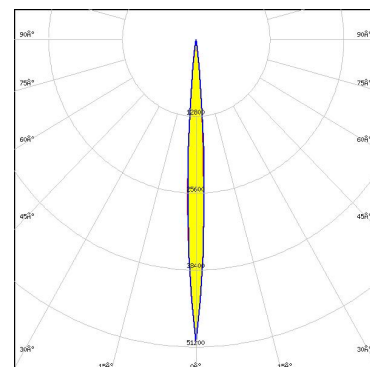


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON CZ
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 92 %
 Peak intensity 50 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:

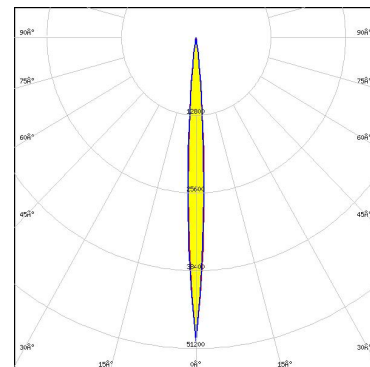

Light distribution files




LED LUXEON CZ
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 92 %
 Peak intensity 52.6 cd/m
 LEDs/each optic 1
 Light colour/type Red
 Required components:

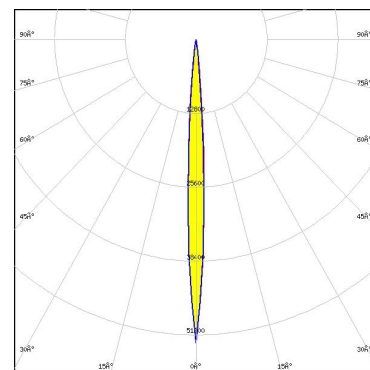

Light distribution files



LED LUXEON HL2X
 FWHM / FWTM 14.0° / 26.0°
 Efficiency 88 %
 Peak intensity 12.6 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:

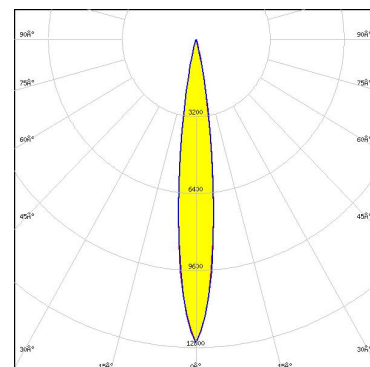


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON HL4Z
 FWHM / FWTM 10.0° / 23.0°
 Efficiency 93 %
 Peak intensity 17.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

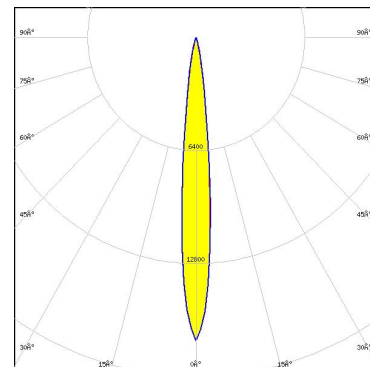

Light distribution files




LED LUXEON V2
 FWHM / FWTM 12.0° / 22.0°
 Efficiency 92 %
 Peak intensity 16.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

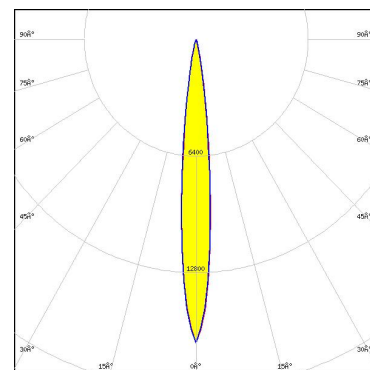

Light distribution files



LED SFT-12R-W-A
 FWHM / FWTM 6.0° / 12.0°
 Efficiency 92 %
 Peak intensity 65.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

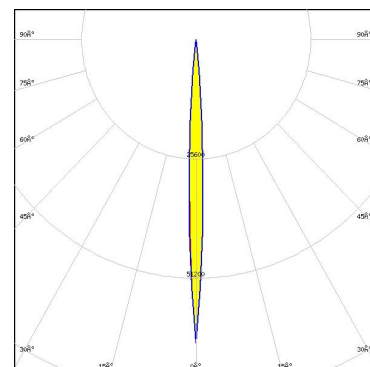


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED SST-20 Gen2
FWHM / FWTM 10.0° / 18.0°
Efficiency 91 %
Peak intensity 24.8 cd/Im
LEDs/each optic 1
Light colour/type White
Required components:

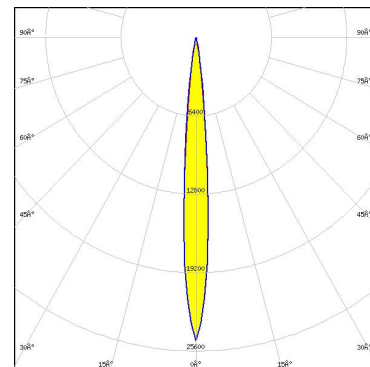

Light distribution files




LED NF2x757G
FWHM / FWTM 10.0° / 24.0°
Efficiency 93 %
Peak intensity 16.5 cd/Im
LEDs/each optic 1
Light colour/type White
Required components:

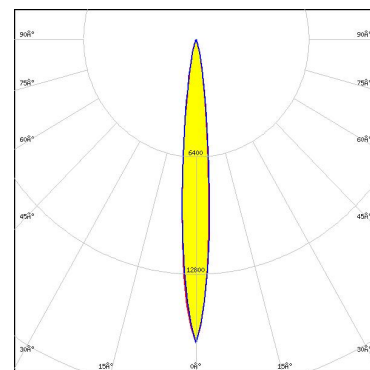

Light distribution files



LED NVSW219F
FWHM / FWTM 12.0° / 22.0°
Efficiency 87 %
Peak intensity 16.1 cd/Im
LEDs/each optic 1
Light colour/type White
Required components:

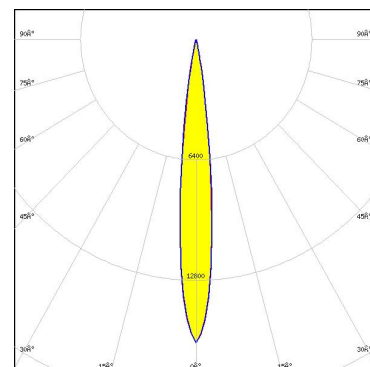


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 10.0° / 22.0°
Efficiency 93 %
Peak intensity 20.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

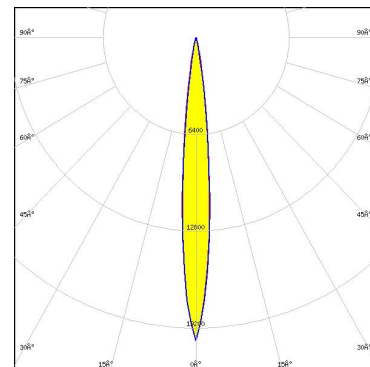

Light distribution files

OSRAM
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 10.0° / 20.0°
Efficiency 92 %
Peak intensity 22.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

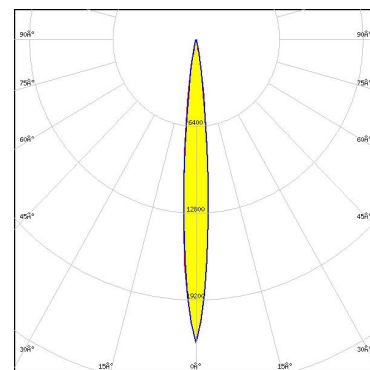

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON SSL 150
FWHM / FWTM 8.0° / 16.0°
Efficiency 93 %
Peak intensity 37.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

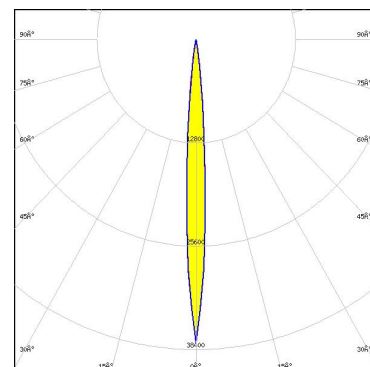


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LH351C
FWHM / FWTM 12.0° / 22.0°
Efficiency 85 %
Peak intensity 14.4 cd/m
LEDs/each optic 1
Light colour/type White
Required components:

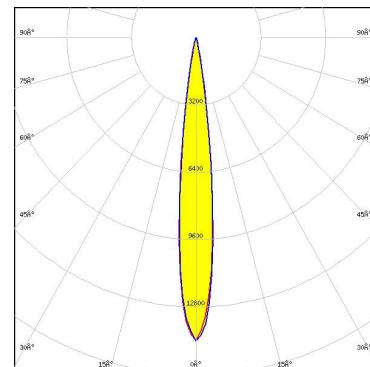

Light distribution files

SAMSUNG

LED LM301B
FWHM / FWTM 9.0° / 21.0°
Efficiency 94 %
Peak intensity 21.7 cd/m
LEDs/each optic 1
Light colour/type White
Required components:

Light distribution files




LED Z5
FWHM / FWTM 10.0°
Efficiency %
LEDs/each optic 1
Light colour/type White
Required components:

OPTICAL RESULTS (SIMULATED):



LED Z8Y22P
FWHM / FWTM 12.0° / 26.0°
Efficiency 92 %
Peak intensity 13.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

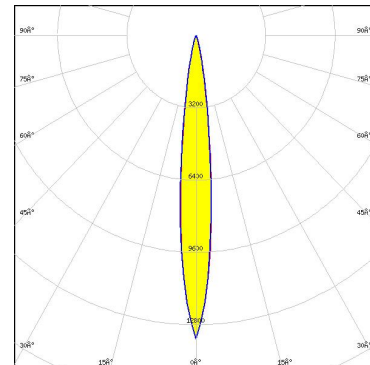

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)