

G2-LXP2-O-90-P

~10° x 40° oval beam optimized for CREE XP-E.
14.7 mm high assembly with installation tape.
Variant with beam direction rotated 90°. Variant
with thin holder with pins.

SPECIFICATION:

Dimensions	Ø 21.8
Height	14.7 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
LXP2-O-90	Single lens	PMMA	clear		
LXP2-LT-HLD	Holder	PC	black		
HEIDI-TAPE	Tape	Acrylic foam	black		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA14511_G2-LXP2-O-90-P	1680	336	112	0.0
» Box size:				


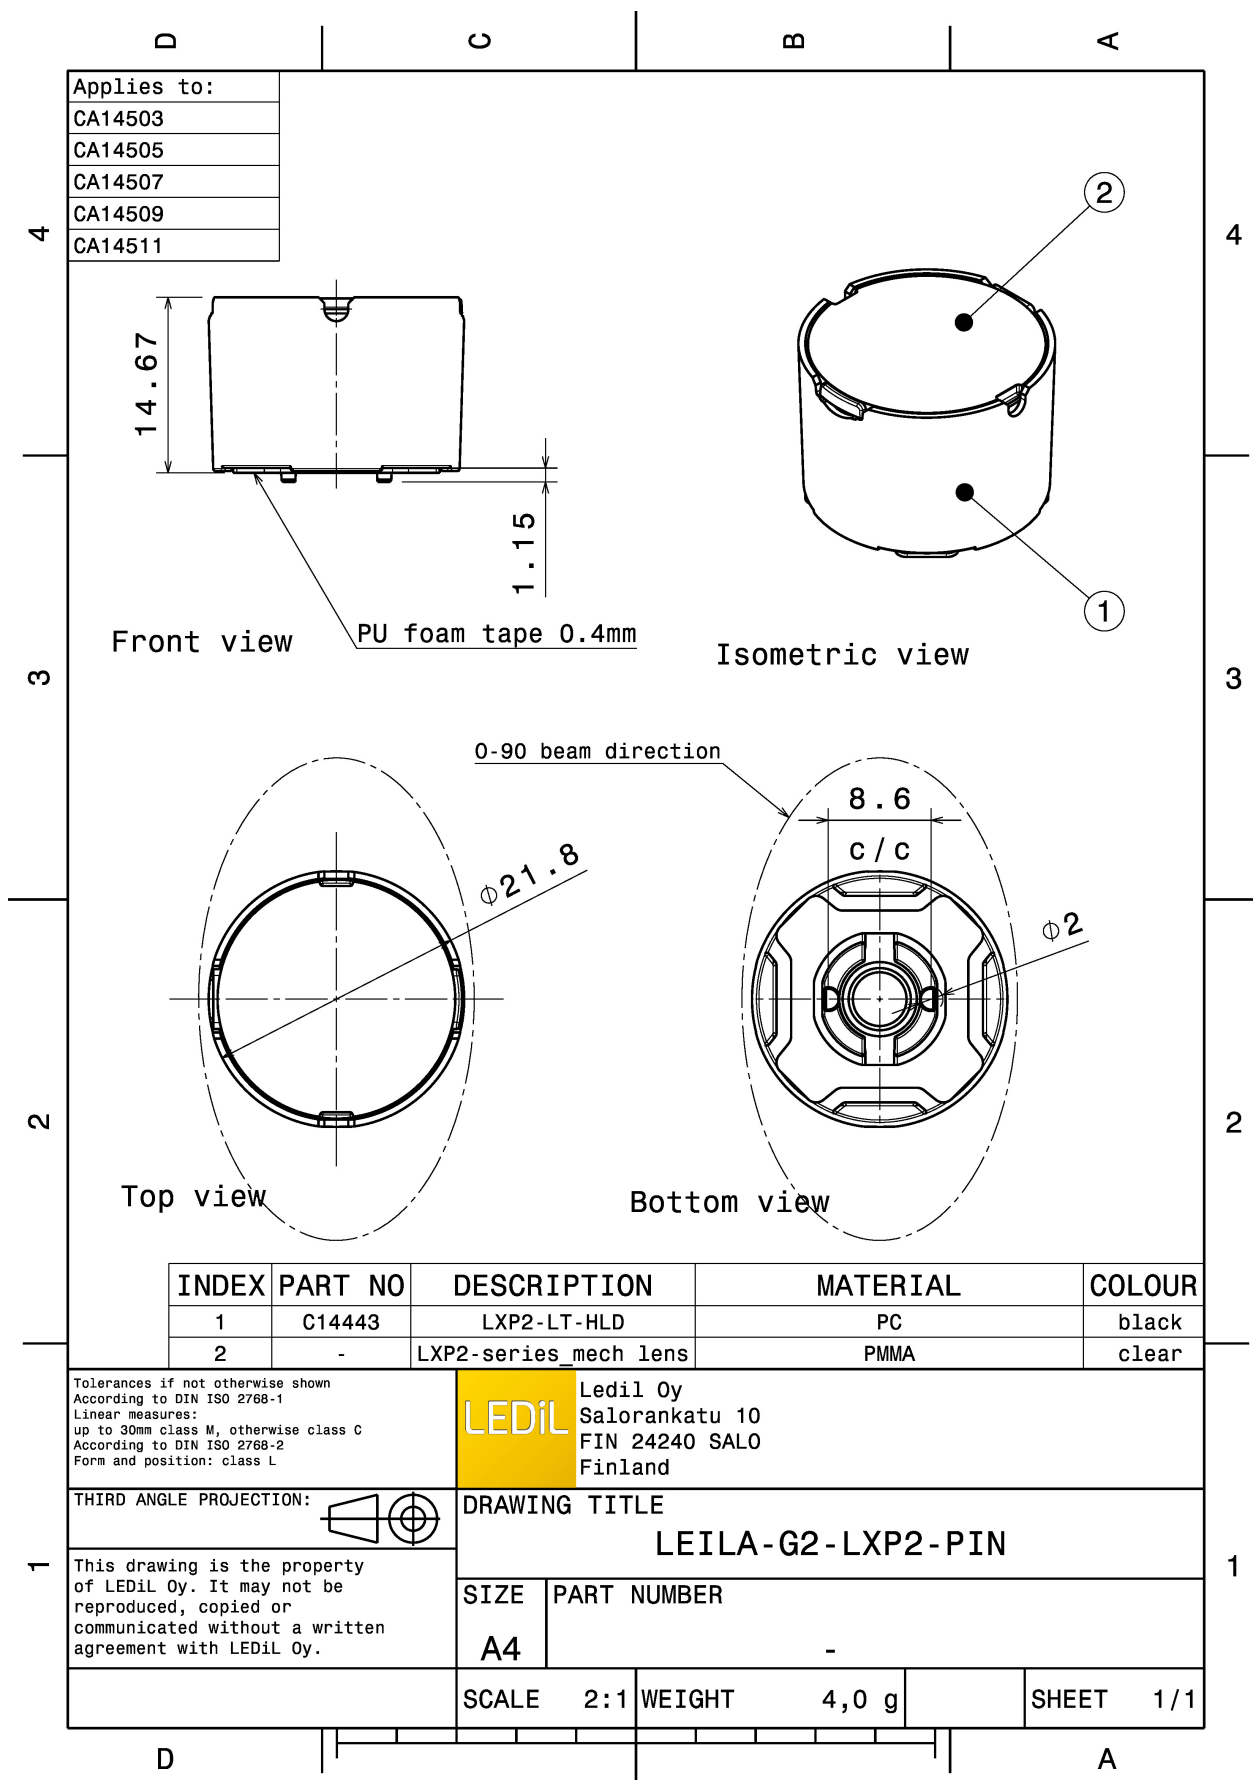


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED XD16
 FWHM / FWTM 11.0 + 43.0° / 34.0 + 61.0°
 Efficiency 78 %
 Peak intensity 3.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

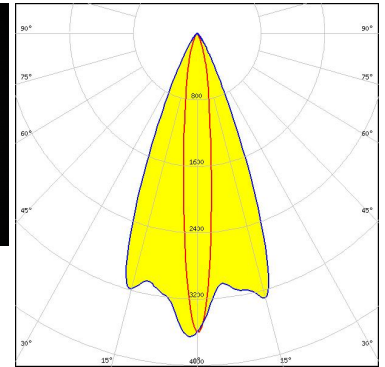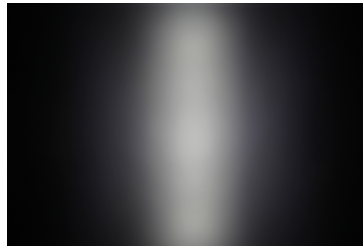

Light distribution files





LED XP-E
 FWHM / FWTM 9.0 + 41.0° / 20.0 + 60.0°
 Efficiency 89 %
 Peak intensity 6.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

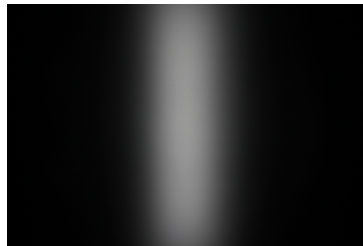

Light distribution files



LED XP-G3
 FWHM / FWTM 13.0 + 43.0° / 34.0 + 64.0°
 Efficiency 84 %
 Peak intensity 3.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

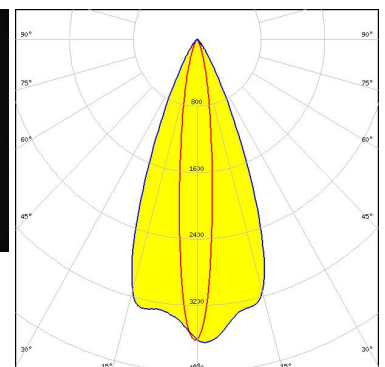
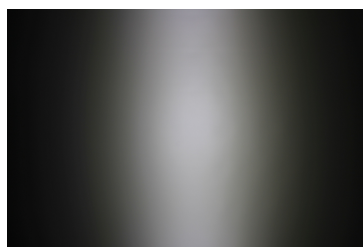


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XQ-E HD
 FWHM / FWTM 9.0 + 43.0° / 21.0 + 57.0°
 Efficiency 85 %
 Peak intensity 5.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

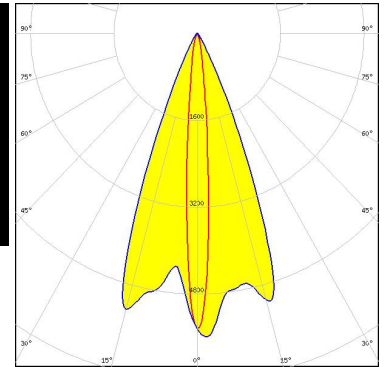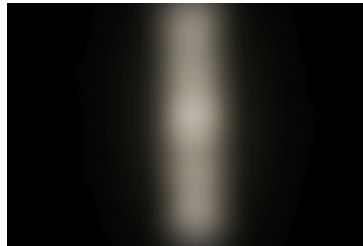

Light distribution files





LED XQ-E HI
 FWHM / FWTM 9.0 + 43.0° / 24.0 + 57.0°
 Efficiency 82 %
 Peak intensity 5.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

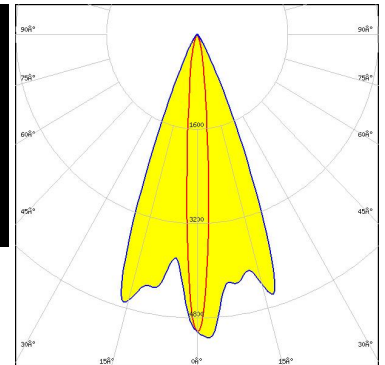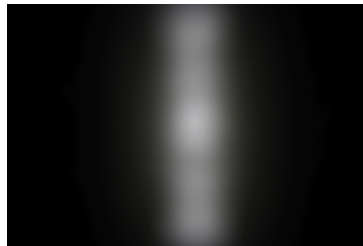

Light distribution files



LED LUXEON CZ
 FWHM / FWTM 10.0 + 43.0° / 28.0 + 58.0°
 Efficiency 86 %
 Peak intensity 4.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

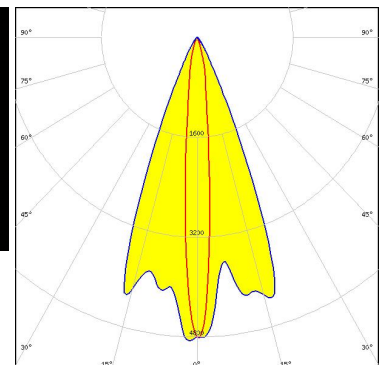
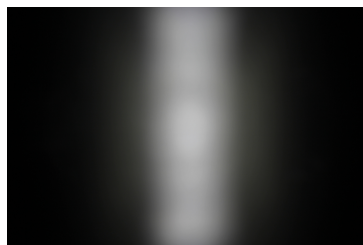


Light distribution files

OPTICAL RESULTS (MEASURED):





LED LUXEON V
FWHM / FWTM 16.0 + 43.0° / 39.0 + 68.0°
Efficiency 85 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

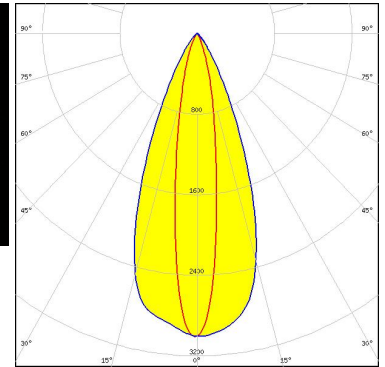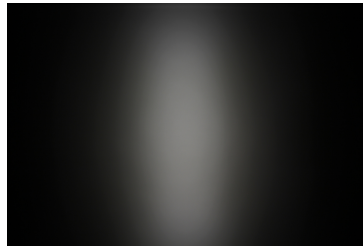

Light distribution files





LED LUXEON Z ES
FWHM / FWTM 13.0 + 44.0° / 31.0 + 61.0°
Efficiency 82 %
Peak intensity 3.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

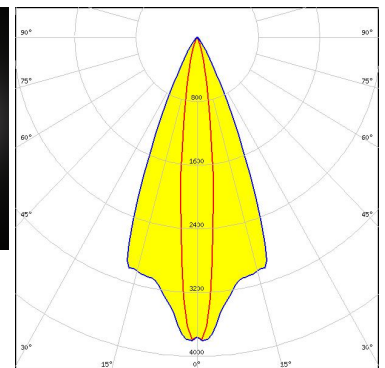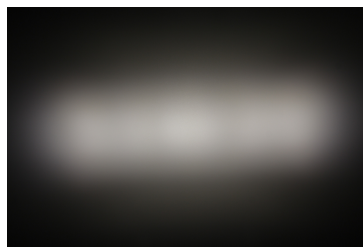

Light distribution files



LED NCSxx19A
FWHM / FWTM 11.0 + 43.0° / 30.0 + 61.0°
Efficiency 84 %
Peak intensity 4.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

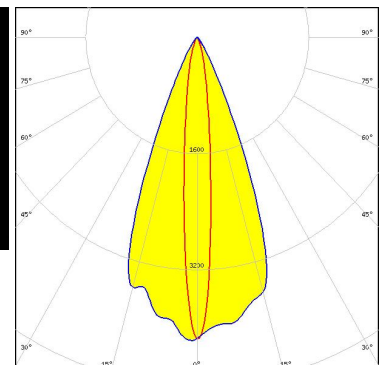
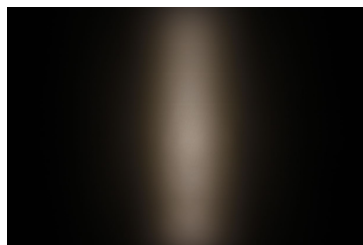


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NVSW219F
 FWHM / FWTM 13.0 + 43.0° / 26.0 + 63.0°
 Efficiency 89 %
 Peak intensity 4.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

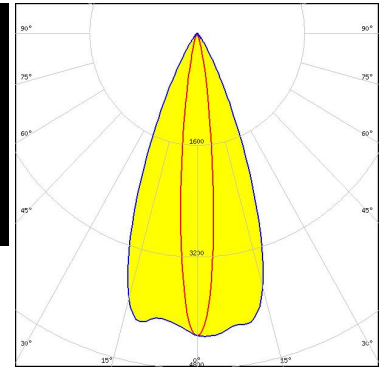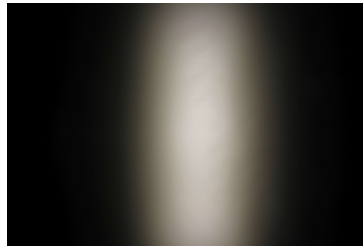

Light distribution files





LED NVSW319B
 FWHM / FWTM 15.0 + 43.0° / 31.0 + 66.0°
 Efficiency 88 %
 Peak intensity 3.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

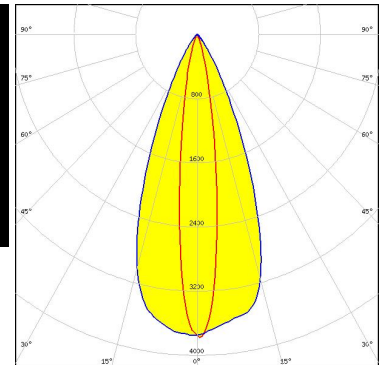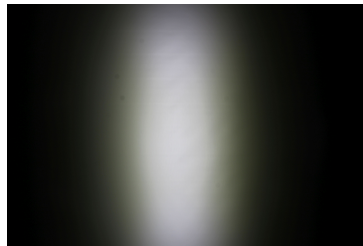

Light distribution files



LED NVSW519A
 FWHM / FWTM 16.0 + 43.0° / 33.0 + 67.0°
 Efficiency 87 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

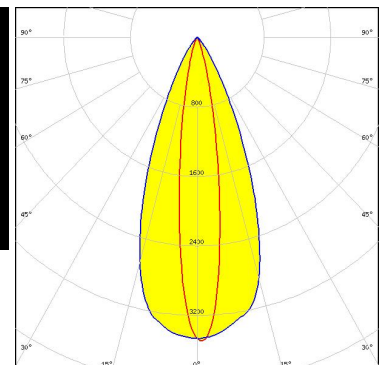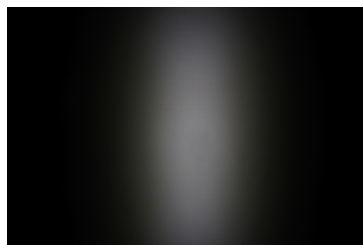


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NWSx229A
 FWHM / FWTM 17.0 + 42.0° / 41.0 + 69.0°
 Efficiency 83 %
 Peak intensity 2.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

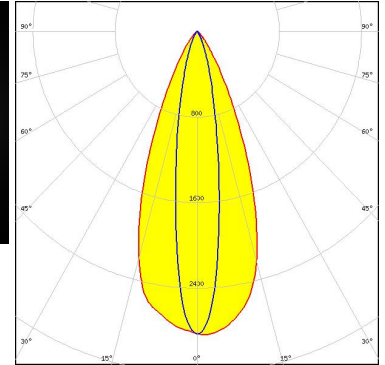

Light distribution files





LED LH181A
 FWHM / FWTM 12.0 + 43.0° / 40.0 + 63.0°
 Efficiency 78 %
 Peak intensity 3.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

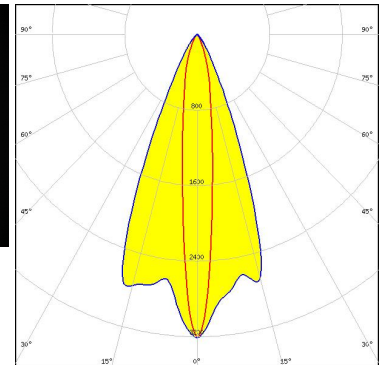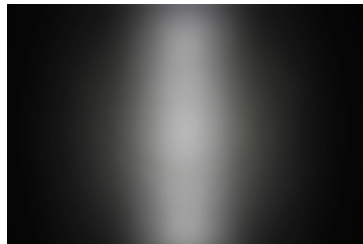

Light distribution files



LED LH181B
 FWHM / FWTM 13.0 + 43.0° / 41.0 + 64.0°
 Efficiency 81 %
 Peak intensity 3.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

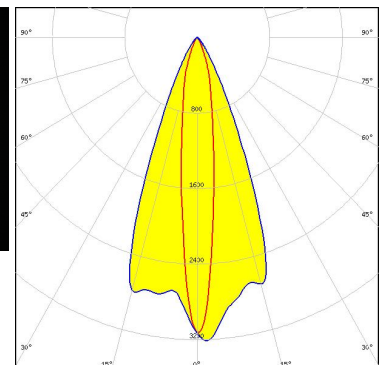
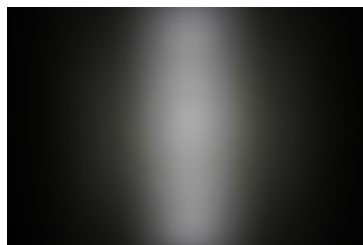


Light distribution files

OPTICAL RESULTS (MEASURED):





LED Z5M3
 FWHM / FWTM 14.0 + 43.0° / 34.0 + 65.0°
 Efficiency 85 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

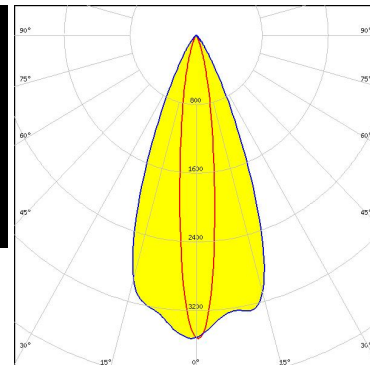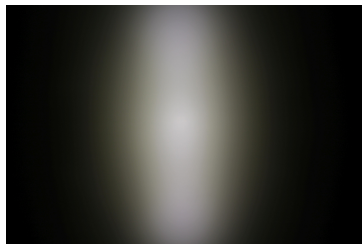

Light distribution files



LED Z8Y22P
 FWHM / FWTM 13.0 + 43.0° / 38.0 + 65.0°
 Efficiency 79 %
 Peak intensity 3.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

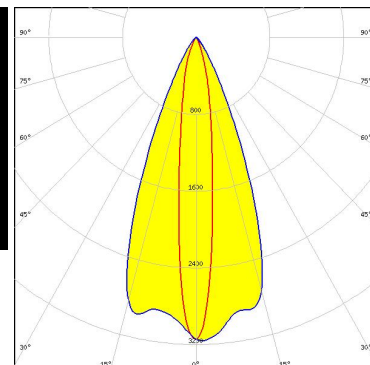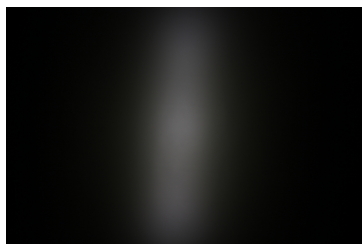


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G2
 FWHM / FWTM 11.0 + 41.0° / 23.0 + 61.0°
 Efficiency 91 %
 Peak intensity 5.3 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

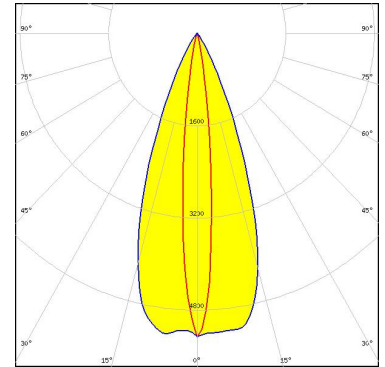

Light distribution files




LED XP-G2 HE
 FWHM / FWTM 14.0 + 40.0° / 28.0 + 64.0°
 Efficiency 89 %
 Peak intensity 4.3 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

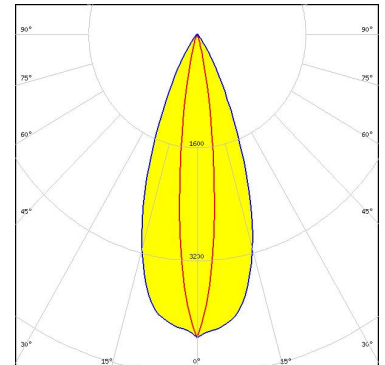

Light distribution files



LED XP-G3
 FWHM / FWTM 14.0 + 41.0° / 29.0 + 64.0°
 Efficiency 89 %
 Peak intensity 4.1 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

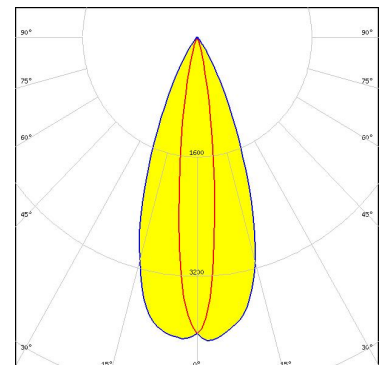


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XQ-E HI
 FWHM / FWTM 8.0 + 42.0° / 18.0 + 56.0°
 Efficiency 90 %
 Peak intensity 6.9 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

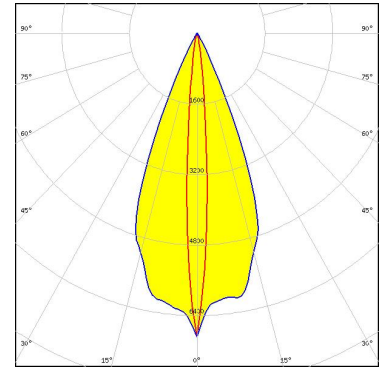

Light distribution files




LED XT-E
 FWHM / FWTM 12.0 + 41.0° / 26.0 + 62.0°
 Efficiency 88 %
 Peak intensity 4.7 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

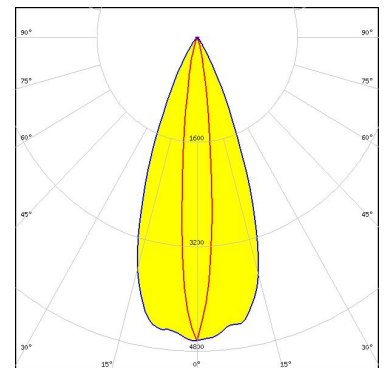

Light distribution files



LED LUXEON C
 FWHM / FWTM 10.0 + 37.0° / 20.0 + 59.0°
 Efficiency 95 %
 Peak intensity 6 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

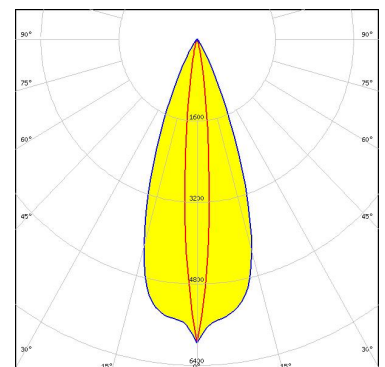


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON CZ
 FWHM / FWTM 8.0 + 42.0° / 18.0 + 56.0°
 Efficiency 92 %
 Peak intensity 6.7 cd/lm
 LEDs/each optic 1
 Light colour/type PC Amber
 Required components:

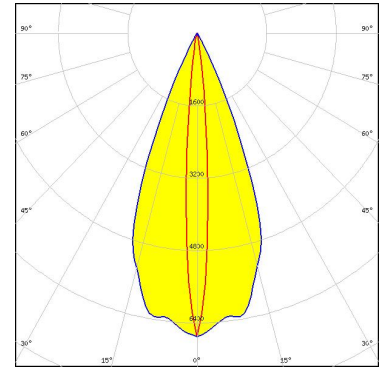

Light distribution files




LED LUXEON CZ
 FWHM / FWTM 8.0 + 42.0° / 16.0 + 56.0°
 Efficiency 92 %
 Peak intensity 7 cd/lm
 LEDs/each optic 1
 Light colour/type Red
 Required components:

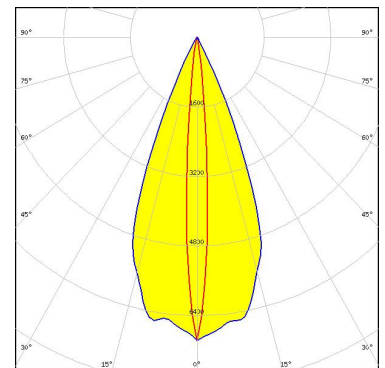

Light distribution files



LED LUXEON T
 FWHM / FWTM 12.0 + 41.0° / 27.0 + 63.0°
 Efficiency 90 %
 Peak intensity 4.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

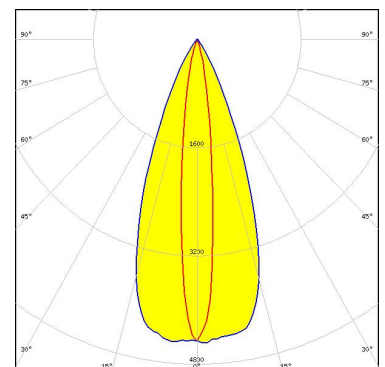


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON TX
 FWHM / FWTM 11.0 + 40.0° / 27.0 + 62.0°
 Efficiency 89 %
 Peak intensity 4.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

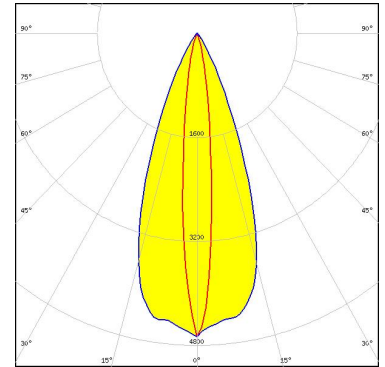

Light distribution files




LED NVSxx19B/NVSxx19C
 FWHM / FWTM 13.0 + 40.0° / 30.0 + 63.0°
 Efficiency 86 %
 Peak intensity 4.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

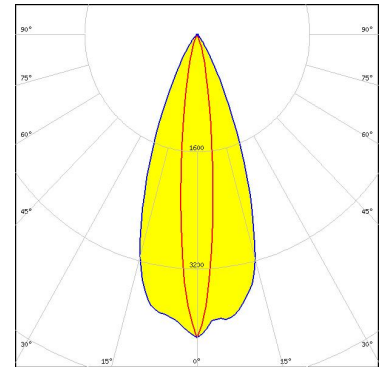

Light distribution files



LED OSCONIQ P 3030
 FWHM / FWTM 10.0 + 42.0° / 24.0 + 58.0°
 Efficiency 92 %
 Peak intensity 5.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

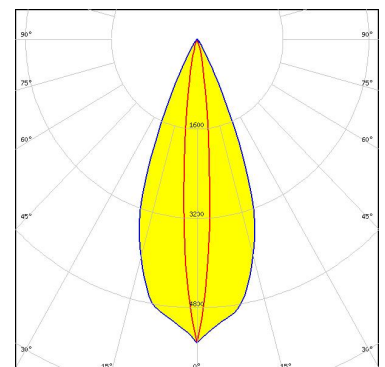


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3737 Flat
FWHM / FWTM 12.0 + 40.0° / 34.0 + 63.0°
Efficiency 90 %
Peak intensity 4.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

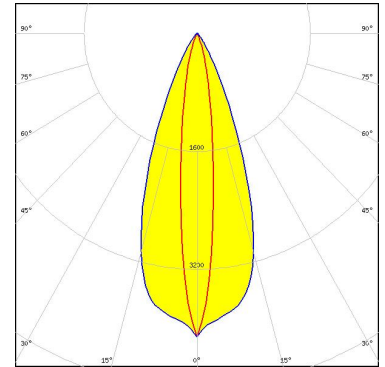

Light distribution files

OSRAM
Opto Semiconductors


LED OSLOM Black Flat (LUW HWQP)
FWHM / FWTM 9.0 + 42.0° / 26.0 + 59.0°
Efficiency 89 %
Peak intensity 5.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

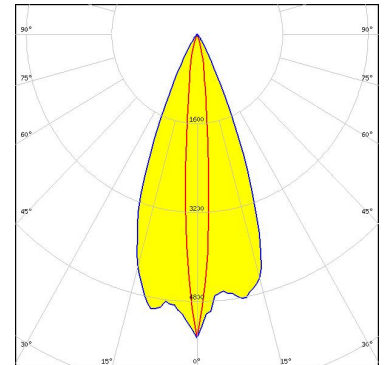

Light distribution files

OSRAM
Opto Semiconductors

LED OSLOM Pure 1414
FWHM / FWTM 12.0 + 38.0° / 25.0 + 62.0°
Efficiency 91 %
Peak intensity 5.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

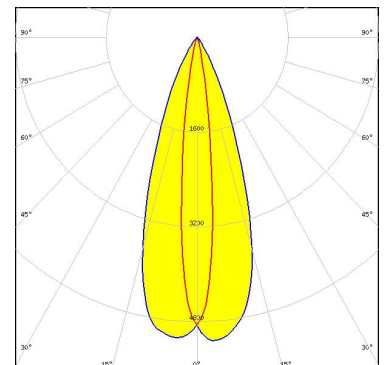


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 11.0 + 41.0° / 26.0 + 62.0°
Efficiency 90 %
Peak intensity 4.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

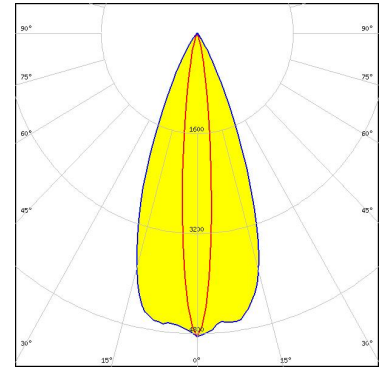

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON SSL 80
FWHM / FWTM 8.0 + 41.0° / 16.0 + 58.0°
Efficiency 90 %
Peak intensity 7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

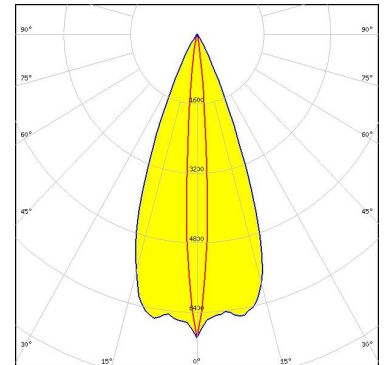

Light distribution files


OSRAM
Opto Semiconductors

LED SFH 4770S
FWHM / FWTM 12.0 + 41.0° / 35.0 + 60.0°
Efficiency 82 %
LEDs/each optic 1
Light colour/type White
Required components:

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED	LH351A
FWHM / FWTM	11.0 + 41.0° / 22.0 + 60.0°
Efficiency	89 %
Peak intensity	5.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

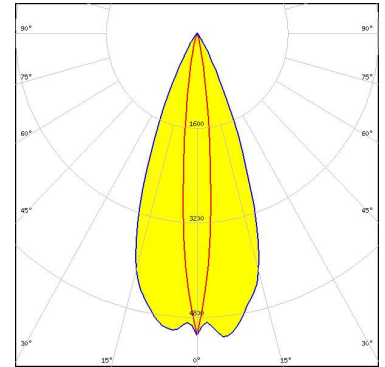

Light distribution files

SAMSUNG


LED	LH351B
FWHM / FWTM	12.0 + 41.0° / 25.0 + 61.0°
Efficiency	89 %
Peak intensity	4.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

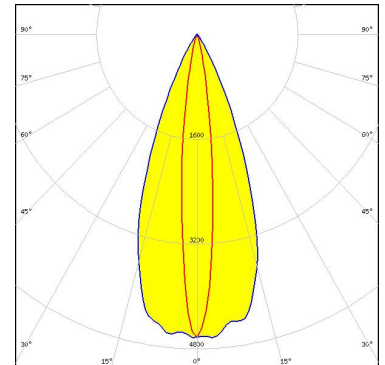

Light distribution files

SAMSUNG

LED	LH351C
FWHM / FWTM	14.0 + 41.0° / 28.0 + 64.0°
Efficiency	89 %
Peak intensity	4.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

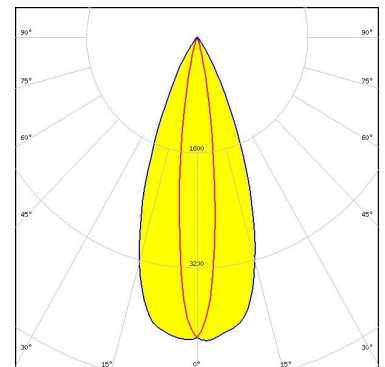


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED Z5M1/Z5M2
 FWHM / FWTM 11.0 + 41.0° / 23.0 + 59.0°
 Efficiency 91 %
 Peak intensity 5.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

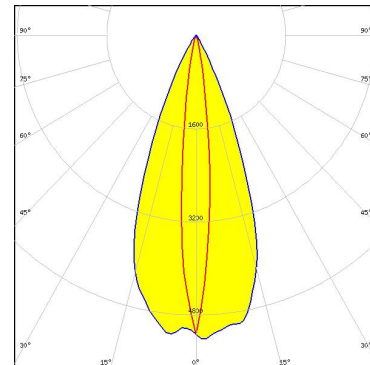

Light distribution files



LED Z5P
 FWHM / FWTM 9.0 + 42.0° / 22.0 + 58.0°
 Efficiency 90 %
 Peak intensity 5.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

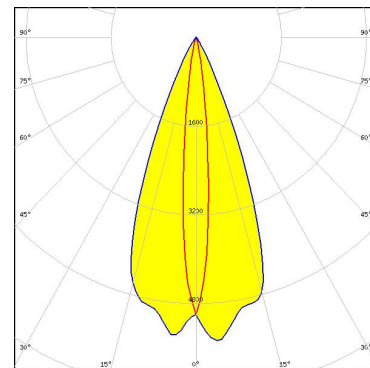

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)