

LEILA-Y-RS

~10° spot beam. 14.8 mm high assembly with holder, installation tape and pins.

SPECIFICATION:

Dimensions	Ã~ 21.6 mm
Height	14.8 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish	Length
LEILA-Y-RS	Single lens	PMMA	clear	gloss	20.0
LEILA-Y-HLD	Holder	PC	black	gloss	21.6
LEILA-Y-TAPE	Tape	Acrylic foam			18.0

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA18089_LEILA-Y-RS » Box size: 476 x 273 x 197 mm	1800	180	180	7.6




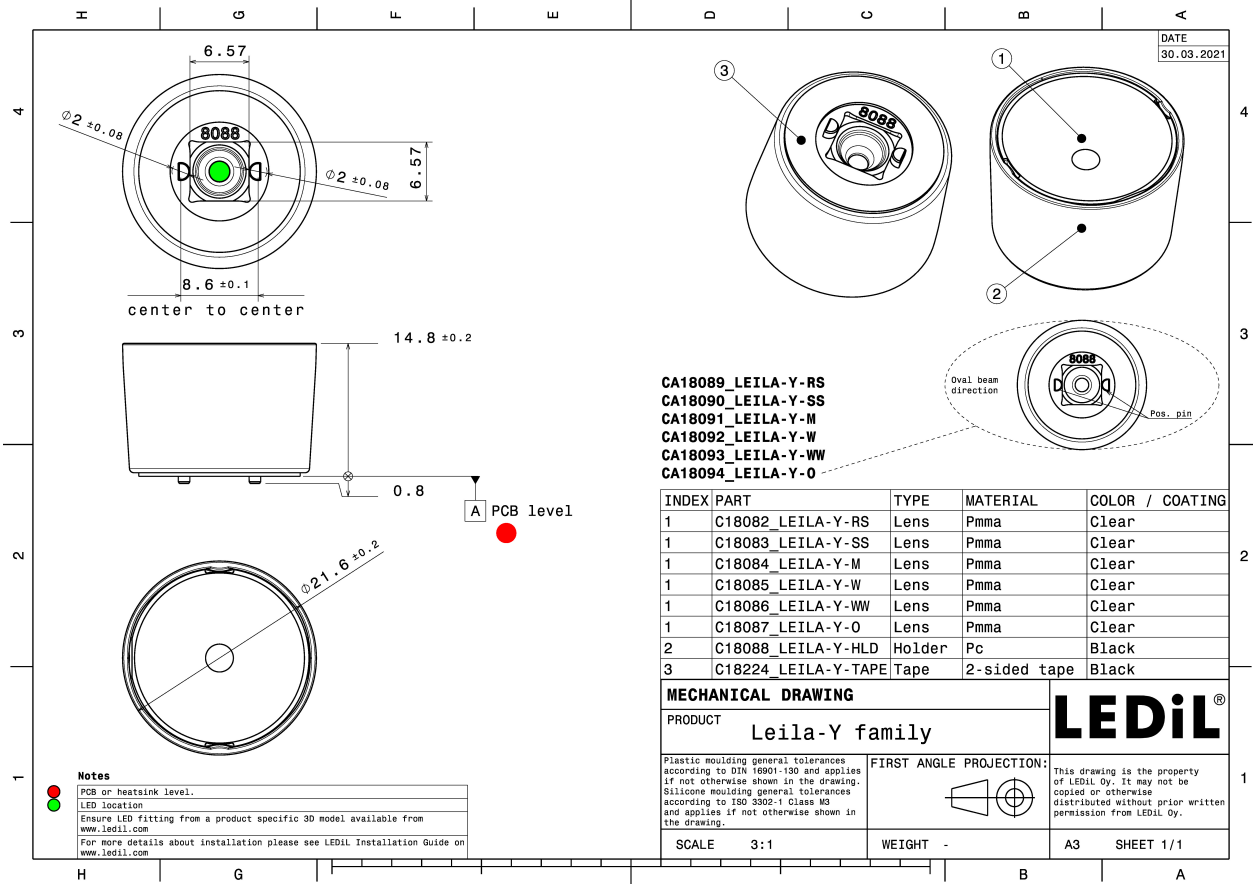


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED XP-G4
FWHM / FWTM 13.0° / 21.0°
Efficiency 87 %
Peak intensity 14.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

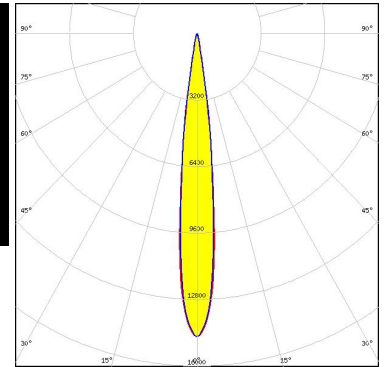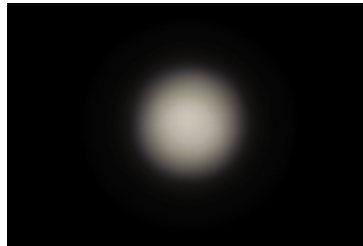

Light distribution files





LED NVSW719AC
FWHM / FWTM 12.0° / 21.0°
Efficiency 87 %
Peak intensity 15.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

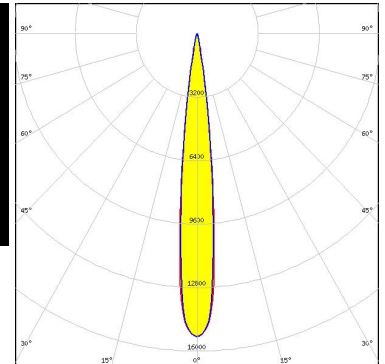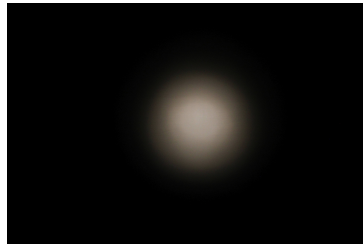

Light distribution files



LED OSLOM Pure 1414
FWHM / FWTM 19.0° / 29.0°
Efficiency 82 %
Peak intensity 7.3 cd/lm
LEDs/each optic 4
Light colour/type RGBW
Required components:

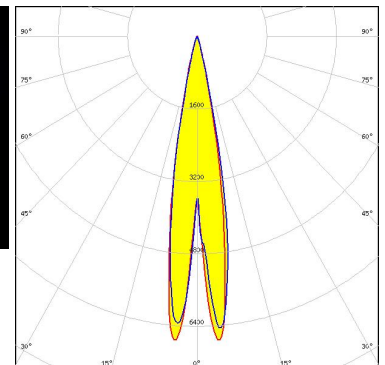
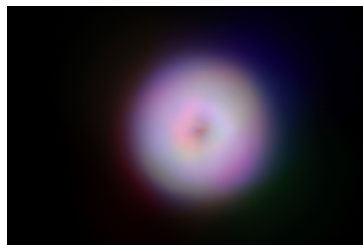


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors

LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	11.0° / 20.0°
Efficiency	87 %
Peak intensity	17.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

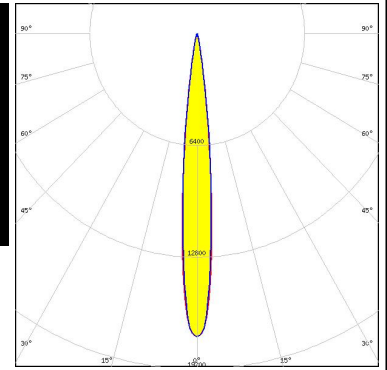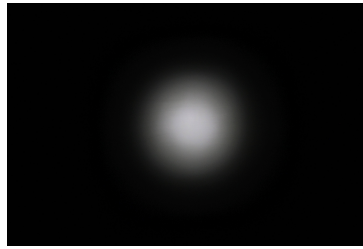


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED J Series 3030C
 FWHM / FWTM 12.0° / 24.0°
 Efficiency 88 %
 Peak intensity 14.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

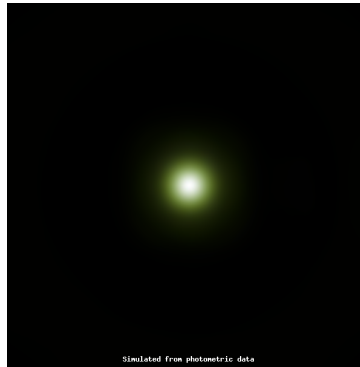


Light distribution files



LED J Series 5050B 6V K Class
 FWHM / FWTM 20.0° / 41.0°
 Efficiency 79 %
 Peak intensity 4.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

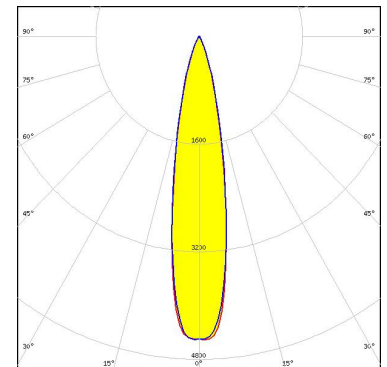

LED XHP35 HD
 FWHM / FWTM 18.0° / 35.0°
 Efficiency 79 %
 Peak intensity 6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

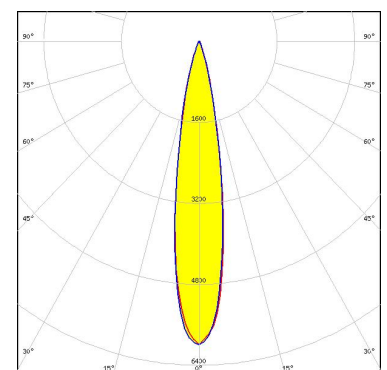


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XHP35 HI
FWHM / FWTM 14.0° / 26.0°
Efficiency 87 %
Peak intensity 11.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

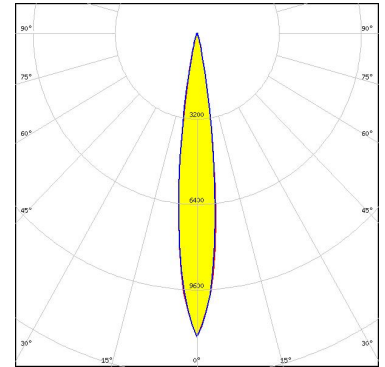


Light distribution files



LED XHP35.2 HI
FWHM / FWTM 18.0° / 32.0°
Efficiency 83 %
Peak intensity 7.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

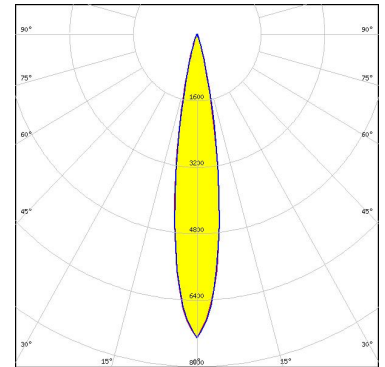

LED XM-L RGBW (XMLDCL HD)
FWHM / FWTM 22.0° / 36.0°
Efficiency 80 %
Peak intensity 4.7 cd/lm
LEDs/each optic 1
Light colour/type RGBW
Required components:

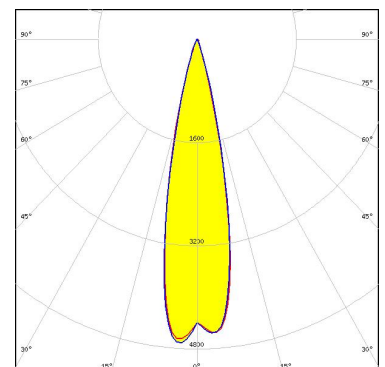


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XM-L2
 FWHM / FWTM 16.0° / 30.0°
 Efficiency 85 %
 Peak intensity 8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

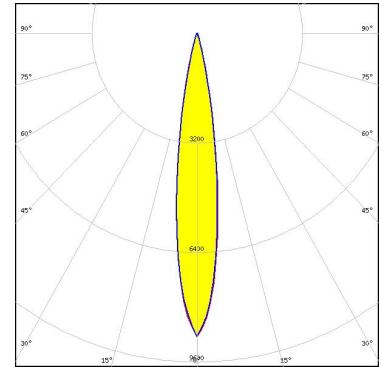

Light distribution files



LED XM-L3
 FWHM / FWTM 15.0° / 29.0°
 Efficiency 80 %
 Peak intensity 8.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

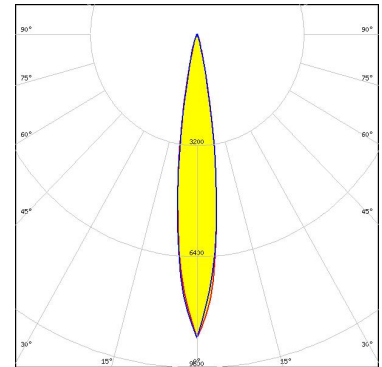

Light distribution files




LED XP-E
 FWHM / FWTM 10.0° / 18.0°
 Efficiency 90 %
 Peak intensity 26.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

OPTICAL RESULTS (SIMULATED):




LED XP-E2
FWHM / FWTM 9.0° / 18.0°
Efficiency 91 %
Peak intensity 30 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

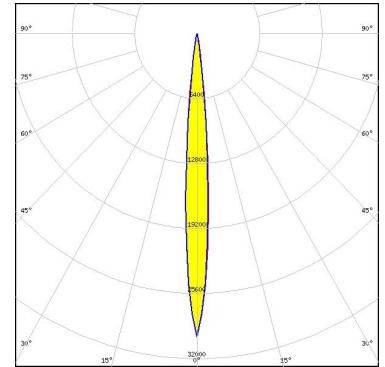

Light distribution files




LED XP-G2
FWHM / FWTM 11.0° / 21.0°
Efficiency 90 %
Peak intensity 19 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

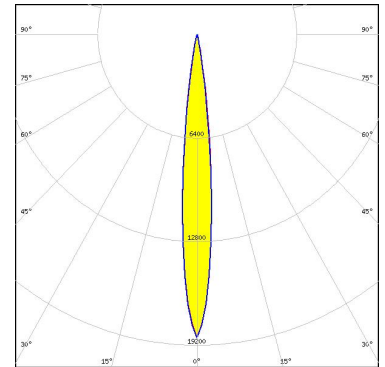

Light distribution files



LED XP-G3
FWHM / FWTM 13.9° / 25.4°
Efficiency 85 %
Peak intensity 11.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

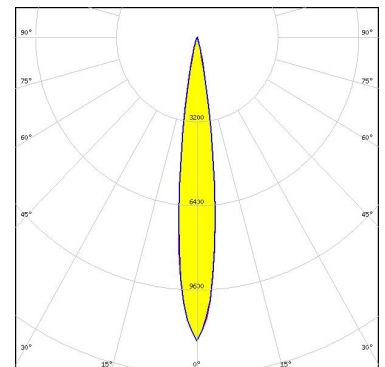


Light distribution files


OPTICAL RESULTS (SIMULATED):



LED XP-G4 HI
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 88 %
 Peak intensity 19.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

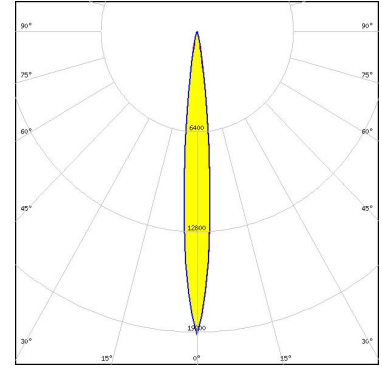


LED XP-L2
 FWHM / FWTM 18.0° / 32.0°
 Efficiency 81 %
 Peak intensity 7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

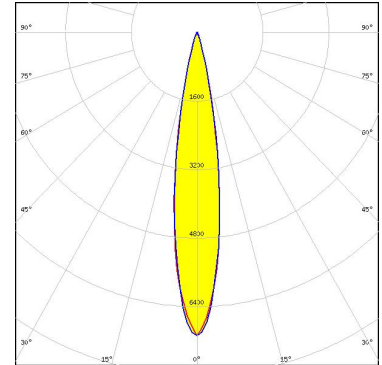

Light distribution files




LED XP-L2
 FWHM / FWTM 18.0° / 32.0°
 Efficiency 80 %
 Peak intensity 6.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

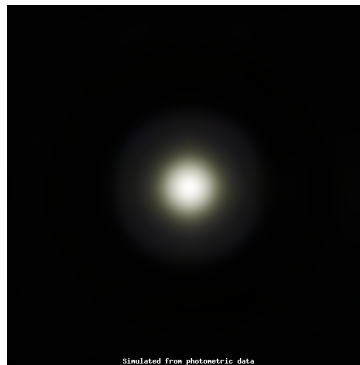


OPTICAL RESULTS (SIMULATED):



LED XQ-E HD
FWHM / FWTM 14.0 + 16.0° / 27.0 + 26.0°
Efficiency 87 %
Peak intensity 10.2 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:




21-2-2024	Detector Image: I1 luminance	Zemax
Simulation: IL VEC Surface: I1	Size: 200,000 x 200,000 x 0.1111 mm, #Pixel: 2000 x 2000 #, Total area: 400000	Zemax OptiCADver10 21.3
Max. Illuminance: 1.01000000000000E+02	Total Power: 1.17188000000000E+01	

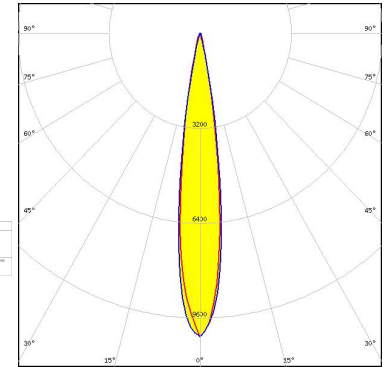


Light distribution files



LED XQ-E HI
FWHM / FWTM 16.0 + 18.0° / 29.0 + 26.0°
Efficiency 88 %
Peak intensity 9.2 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:




21-2-2024	Detector Image: I1 luminance	Zemax
Simulation: IL VEC Surface: I1	Size: 200,000 x 200,000 x 0.1111 mm, #Pixel: 2000 x 2000 #, Total area: 400000	Zemax OptiCADver10 21.3
Max. Illuminance: 0.91000000000000E+02	Total Power: 1.14888000000000E+01	

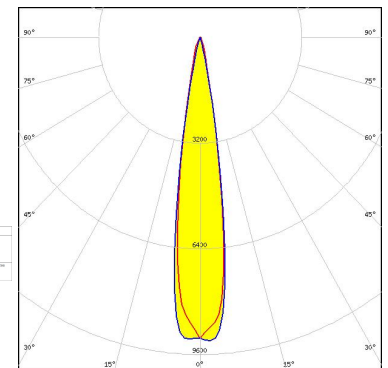

Light distribution files



LED LUXEON 5050 Round LES
FWHM / FWTM 22.0° / 40.0°
Efficiency 81 %
Peak intensity 4.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

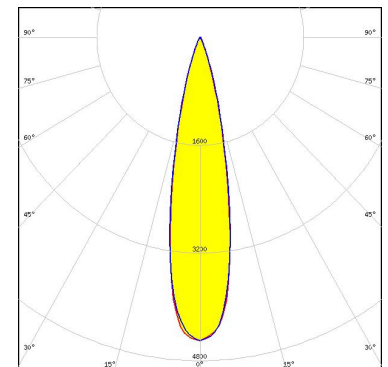


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Square LES
FWHM / FWTM 20.0° / 40.0°
Efficiency 81 %
Peak intensity 4.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

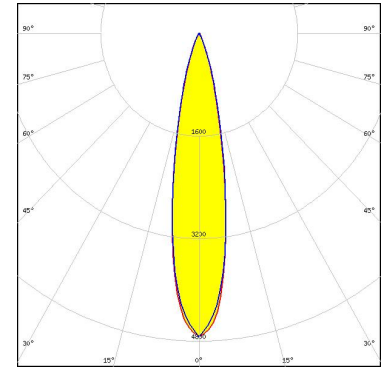

Light distribution files



LED LUXEON CZ
FWHM / FWTM 8.0° / 16.0°
Efficiency 91 %
Peak intensity 35.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



LED LUXEON HL2Z
FWHM / FWTM 11.0° / 24.0°
Efficiency 87 %
Peak intensity 16.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


OPTICAL RESULTS (SIMULATED):

LUMILEDS

LED LUXEON Rubix
FWHM / FWTM 8.0° / 16.0°
Efficiency 92 %
Peak intensity 33.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

LUMILEDS


LED LUXEON TX
FWHM / FWTM 12.0° / 23.0°
Efficiency 88 %
Peak intensity 16 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

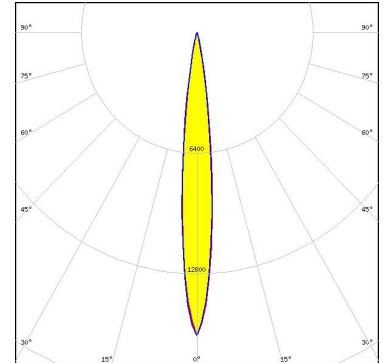

Light distribution files




LUMILEDS

LED LUXEON Z ES
FWHM / FWTM 10.0° / 18.0°
Efficiency 90 %
Peak intensity 26 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

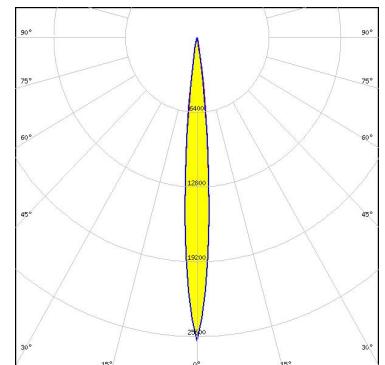

Light distribution files

OPTICAL RESULTS (SIMULATED):

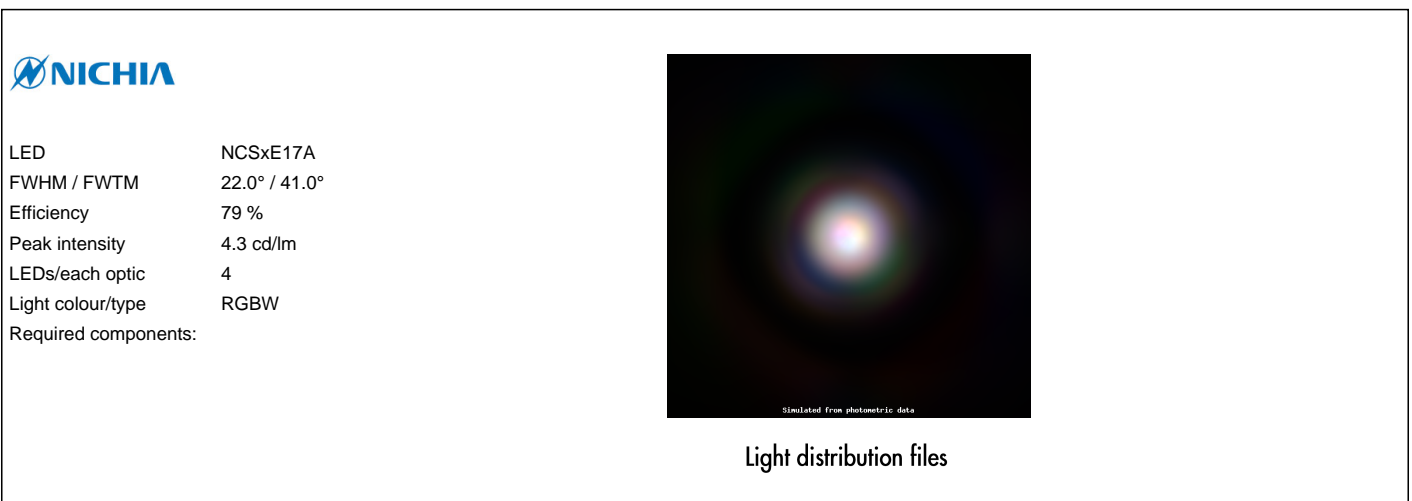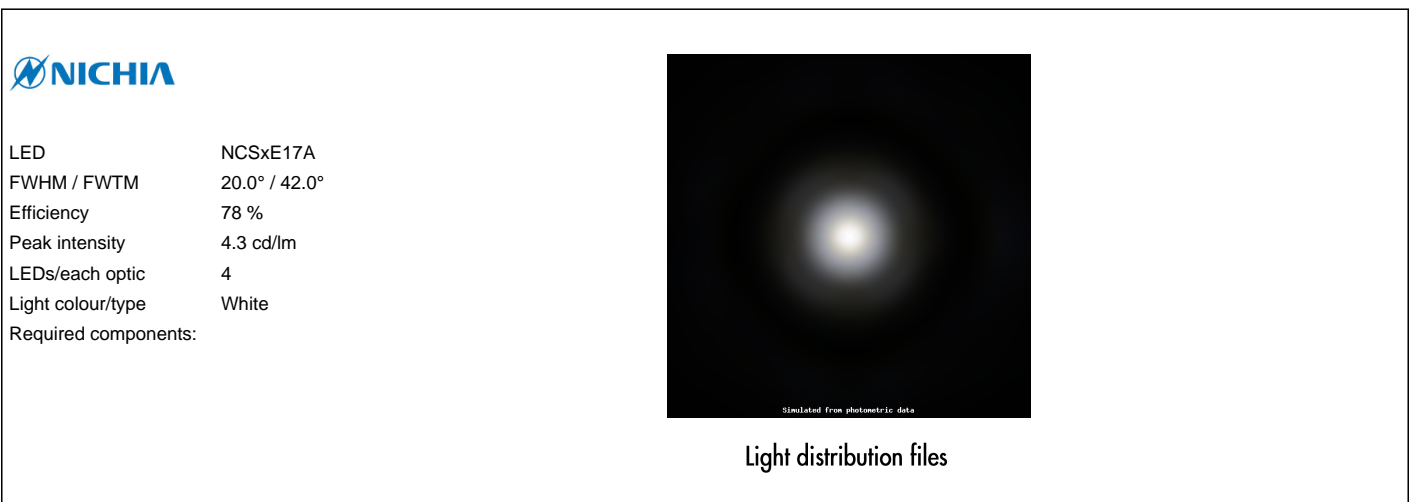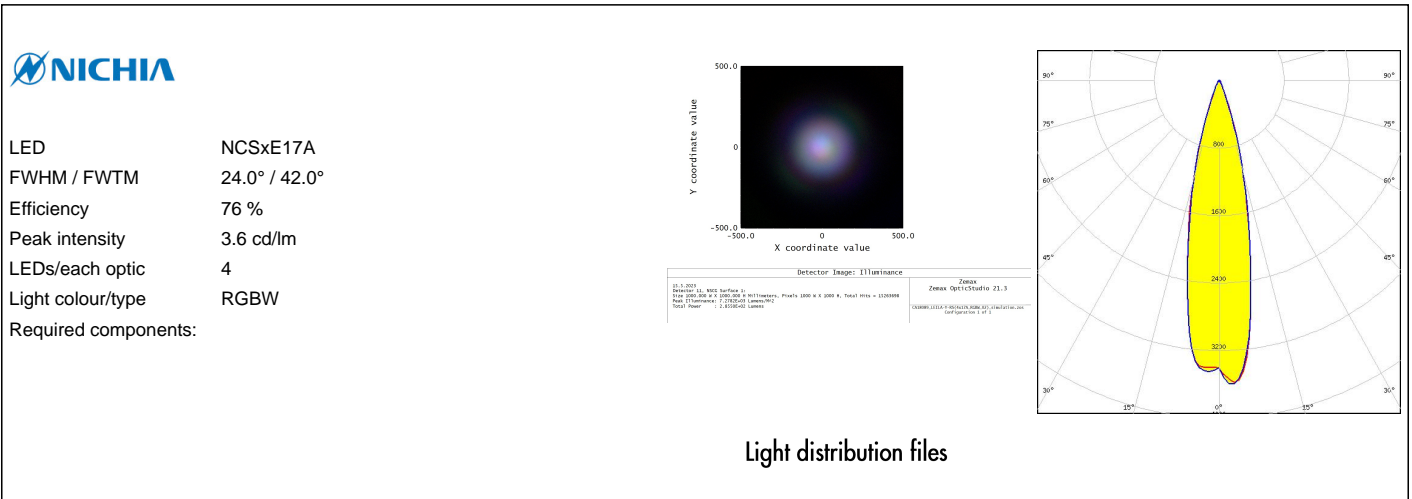


OPTICAL RESULTS (SIMULATED):




LED NF2x757G
FWHM / FWTM 12.0° / 24.0°
Efficiency 88 %
Peak intensity 13.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



LED NFSx757G
FWHM / FWTM 8.0° / 20.0°
Efficiency 88 %
Peak intensity 24 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



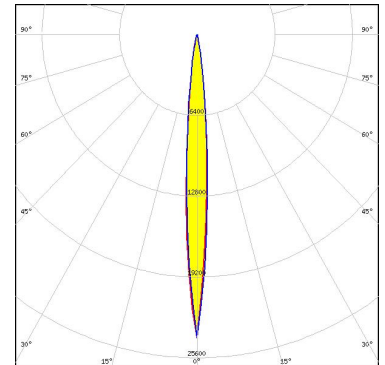


LED NVSW219F
FWHM / FWTM 14.0° / 25.0°
Efficiency 88 %
Peak intensity 12 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

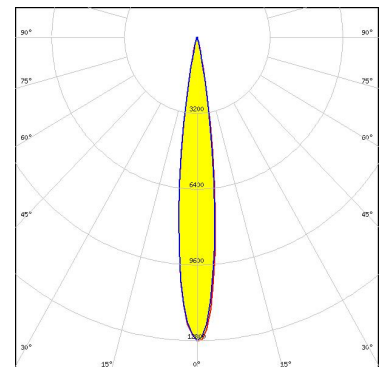

Light distribution files


OPTICAL RESULTS (SIMULATED):

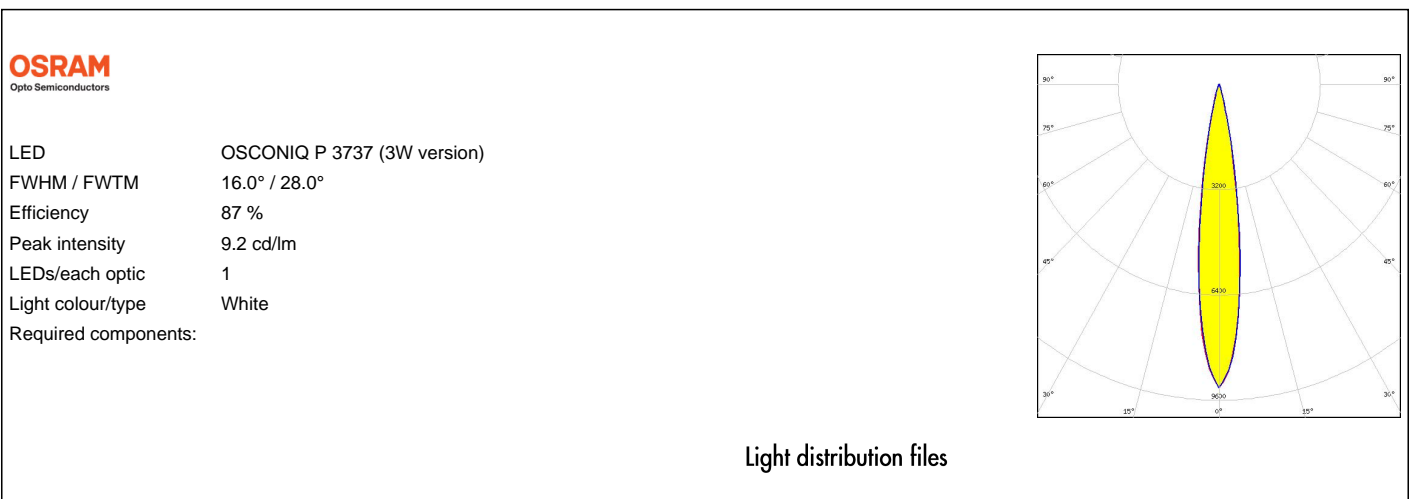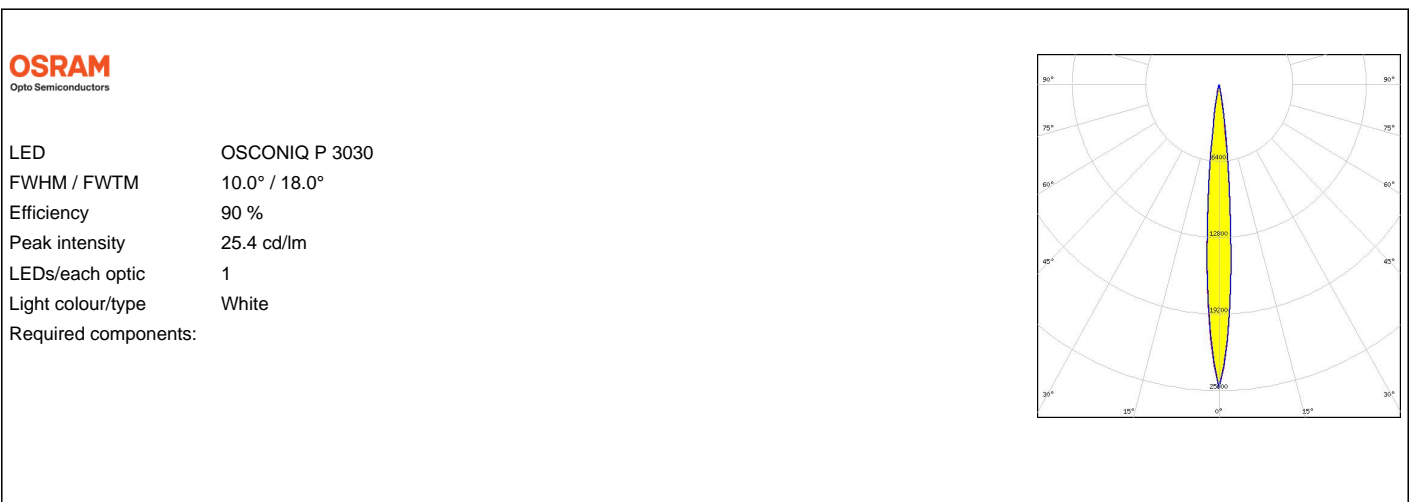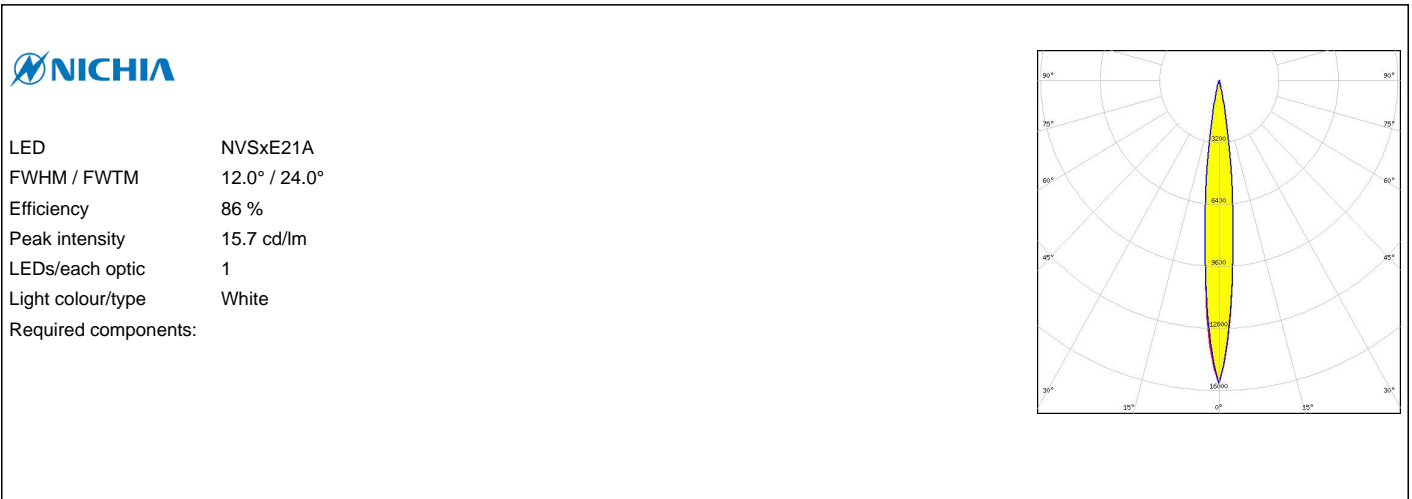

OPTICAL RESULTS (SIMULATED):


OSRAM
Opto Semiconductors

LED OSCONIQ S 5050
 FWHM / FWTM 22.0° / 42.0°
 Efficiency 80 %
 Peak intensity 4.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

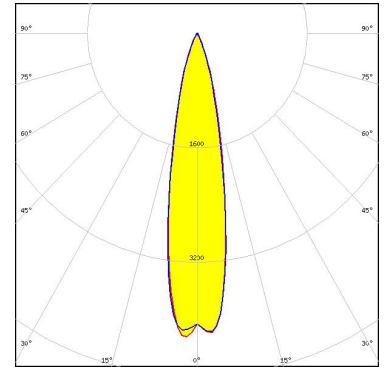


OSRAM
Opto Semiconductors

LED OSLON Black Flat (LUW HWQP)
 FWHM / FWTM 6.0° / 14.0°
 Efficiency 90 %
 Peak intensity 53.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

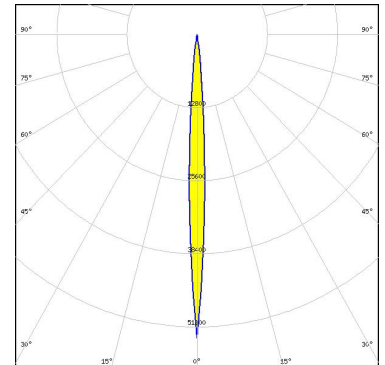

OSRAM
Opto Semiconductors


LED OSLON Pure 1414
 FWHM / FWTM 8.0° / 16.0°
 Efficiency 91 %
 Peak intensity 33.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

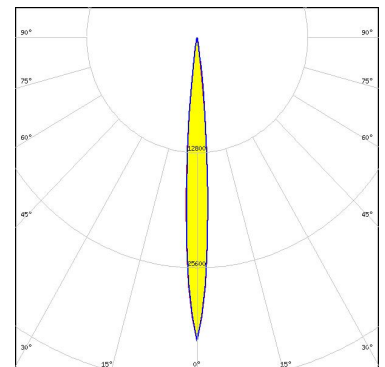

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 10.0° / 18.0°
Efficiency 89 %
Peak intensity 24.9 cd/lm
LEDs/each optic 1
Light colour/type Far Red
Required components:

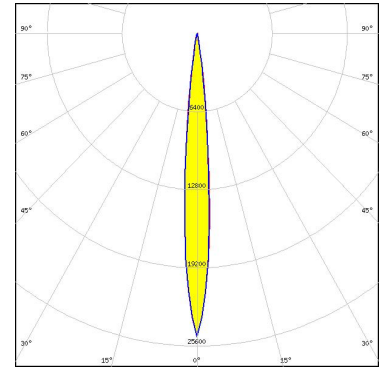

Light distribution files

OSRAM
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 12.0° / 24.0°
Efficiency 88 %
Peak intensity 15 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

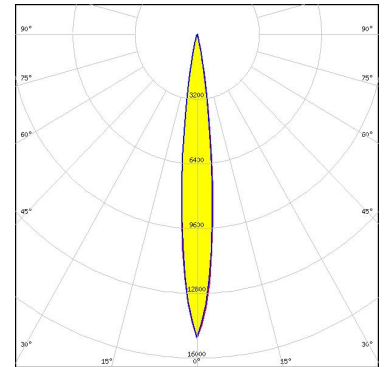

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON Square Flat
FWHM / FWTM 10.0° / 20.0°
Efficiency 90 %
Peak intensity 22.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

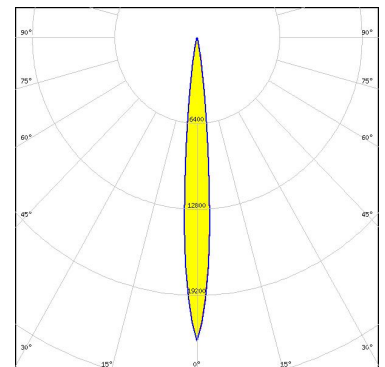

Light distribution files


OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED OSLON SSL 150
 FWHM / FWTM 10.0° / 18.0°
 Efficiency 91 %
 Peak intensity 25.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

OSRAM
Opto Semiconductors


LED OSLON SSL 150
 FWHM / FWTM 9.0° / 18.0°
 Efficiency 91 %
 Peak intensity 27 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

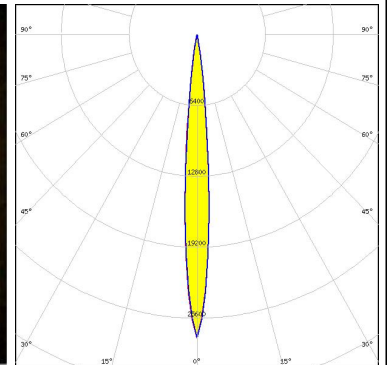

Light distribution files

OSRAM
Opto Semiconductors


LED SYNIOS S2222
 FWHM / FWTM 10.0° / 18.0°
 Efficiency 90 %
 Peak intensity 23.4 cd/lm
 LEDs/each optic 1
 Light colour/type Blue
 Required components:

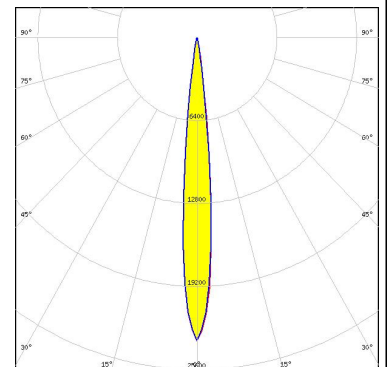

OPTICAL RESULTS (SIMULATED):


OSRAM
Opto Semiconductors

LED SYNIOS S2222
FWHM / FWTM 10.0° / 16.0°
Efficiency 91 %
Peak intensity 26.6 cd/lm
LEDs/each optic 1
Light colour/type Red
Required components:

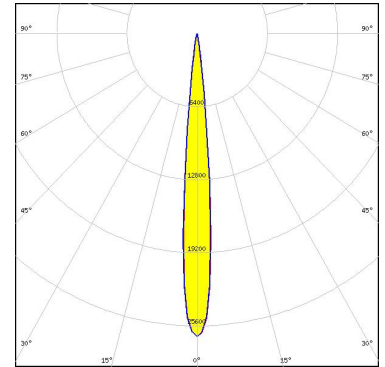


OSRAM
Opto Semiconductors

LED SYNIOS S2222
FWHM / FWTM 10.0° / 16.0°
Efficiency 91 %
Peak intensity 27 cd/lm
LEDs/each optic 1
Light colour/type Yellow
Required components:

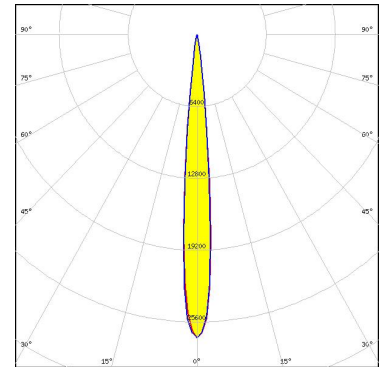

OSRAM
Opto Semiconductors


LED SYNIOS S2222
FWHM / FWTM 10.0° / 18.0°
Efficiency 90 %
Peak intensity 22.9 cd/lm
LEDs/each optic 1
Light colour/type Blue
Required components:

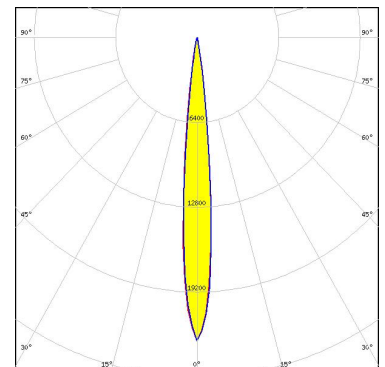

OPTICAL RESULTS (SIMULATED):


OSRAM
Opto Semiconductors

LED SYNIOS S2222
 FWHM / FWTM 10.0° / 18.0°
 Efficiency 90 %
 Peak intensity 22.8 cd/lm
 LEDs/each optic 1
 Light colour/type Green
 Required components:

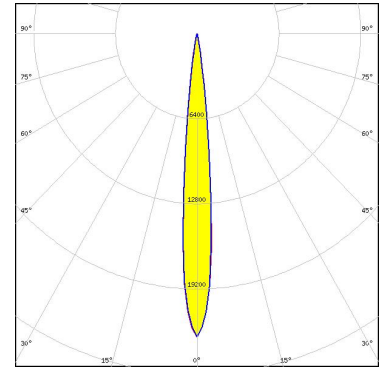

SAMSUNG


LED LH351B
 FWHM / FWTM 13.0° / 24.0°
 Efficiency 86 %
 Peak intensity 13 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

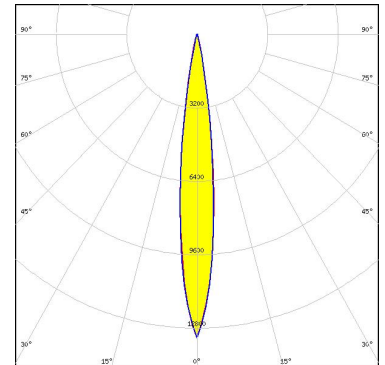

Light distribution files

SEMI
SEOUL SEMICONDUCTOR

LED Z5M4
 FWHM / FWTM 15.0° / 28.0°
 Efficiency 87 %
 Peak intensity 10.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

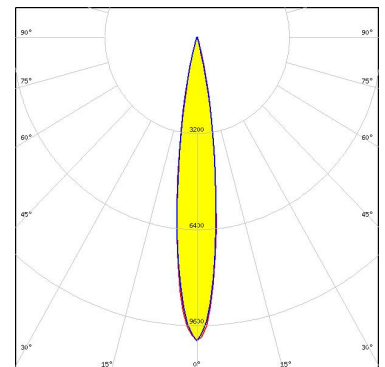

Light distribution files

OPTICAL RESULTS (SIMULATED):



LED	MGN1108MS
FWHM / FWTM	10.0° / 16.0°
Efficiency	91 %
LEDs/each optic	1
Light colour/type	IR
Required components:	



LED	MJN1108MS
FWHM / FWTM	8.0° / 16.0°
Efficiency	92 %
LEDs/each optic	1
Light colour/type	IR
Required components:	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)