



4

4


C12371_LXP2-W

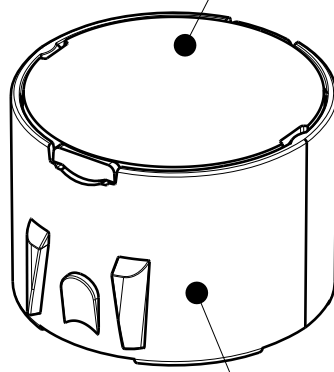


L20032_LEILA-SC2-HLD-BLK

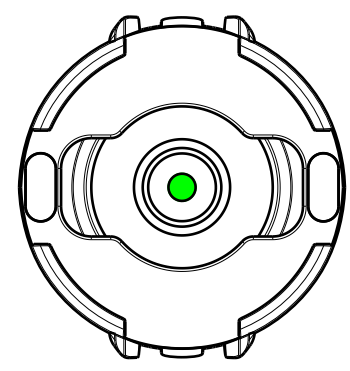

Recommended PAD design


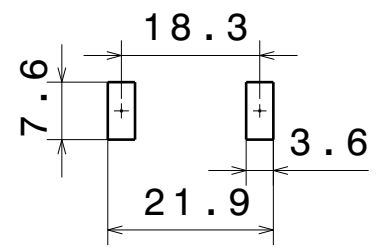


Clip reference distance after soldering

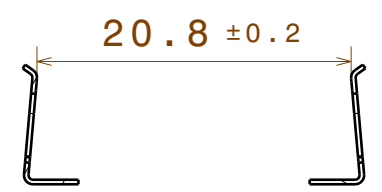


3

3

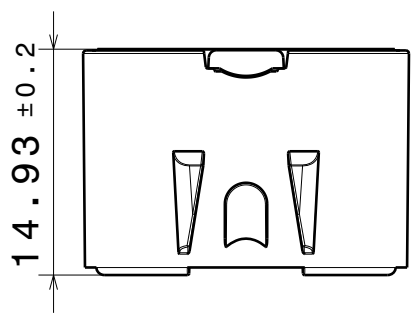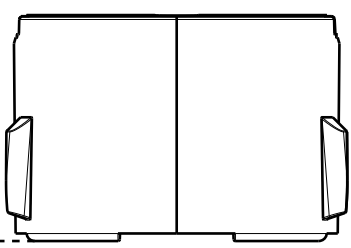


C18696_SOLDER-CLIP-2
Bottom of solder clip underneath holder
Opening of solder clip facing holder

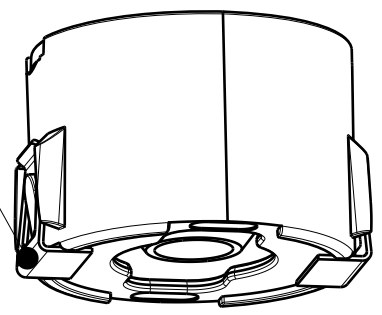

2


2

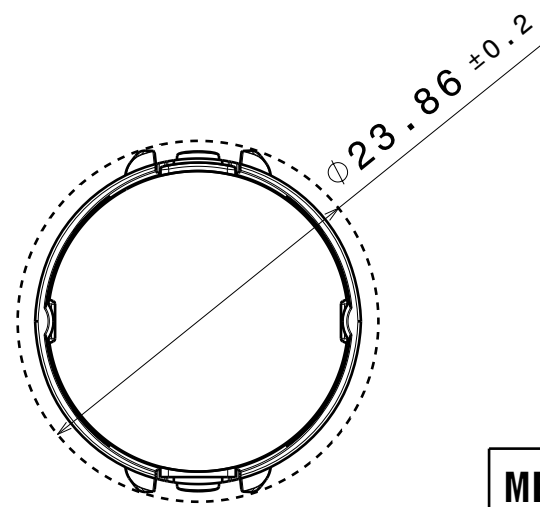

LP20037_LEILA-SC2-W

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C12371_LXP2-W	LENS	1	PMMA	CLEAR
2	L20032_LEILA-SC2-HLD-BLK	HOLDER	1	PC	BLACK

MECHANICAL DRAWING		LEDiL
PRODUCT LEILA-SC2-W		
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 2:1	WEIGHT -	A3 SHEET 1/1

Notes	
	PCB or heatsink level.
	LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com	
For more details about installation please see LEDiL Installation Guide on www.ledil.com	

1