




C11410 LXP2-RS

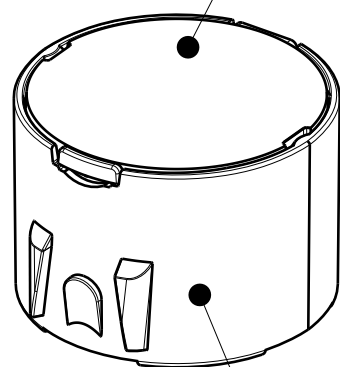



L20033 LEILA-SC2-HLD-WHT

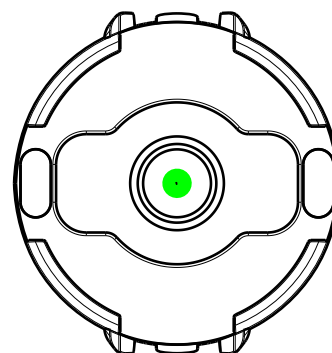


Recommended PAD design

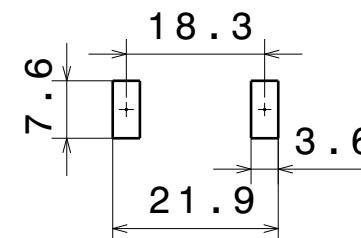

Clip reference distance after soldering

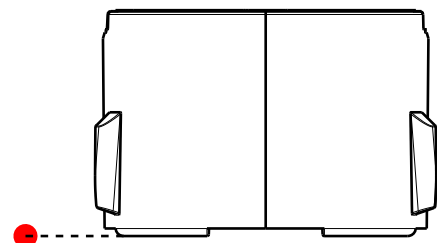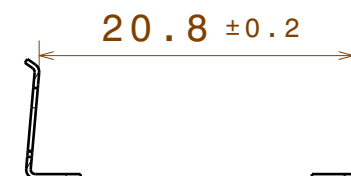


14.93 ± 0.25



C18696 SOLDER-CLIP-2

Bottom of solder clip underneath holder
Opening of solder clip facing holder

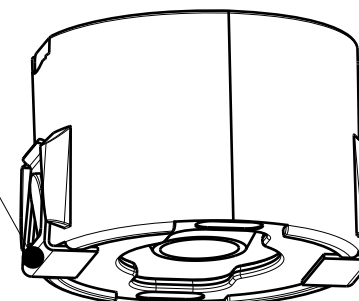

LP20042 LEILA-SC2-RS-WHT

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C11410_LXP2-RS	LENS	1	PMMA	CLEAR
2	L20033 LEILA-SC2-HLD-WHT	HOLDER	1	PC	WHITE


MECHANICAL DRAWING

PRODUCT	
---------	--

LEILA-SC2-RS

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



• This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1

WEIGHT -

A3 SHEET 1 / 1

Notes

- | | |
|---|---|
|  | PCB or heatsink level. |
|  | LED location |
| | Ensure LED fitting from a product specific 3D model available from www.ledil.com |
| | For more details about installation please see LEDiL Installation Guide on www.ledil.com |