
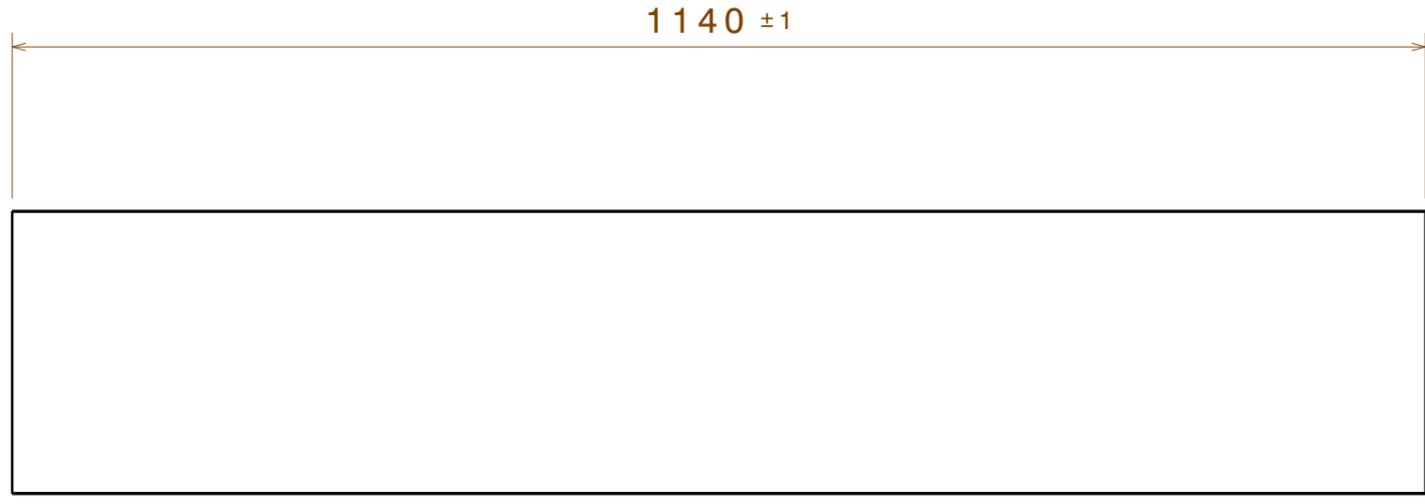


Preferred screw type:  
M4 Button head screw DIN 7380

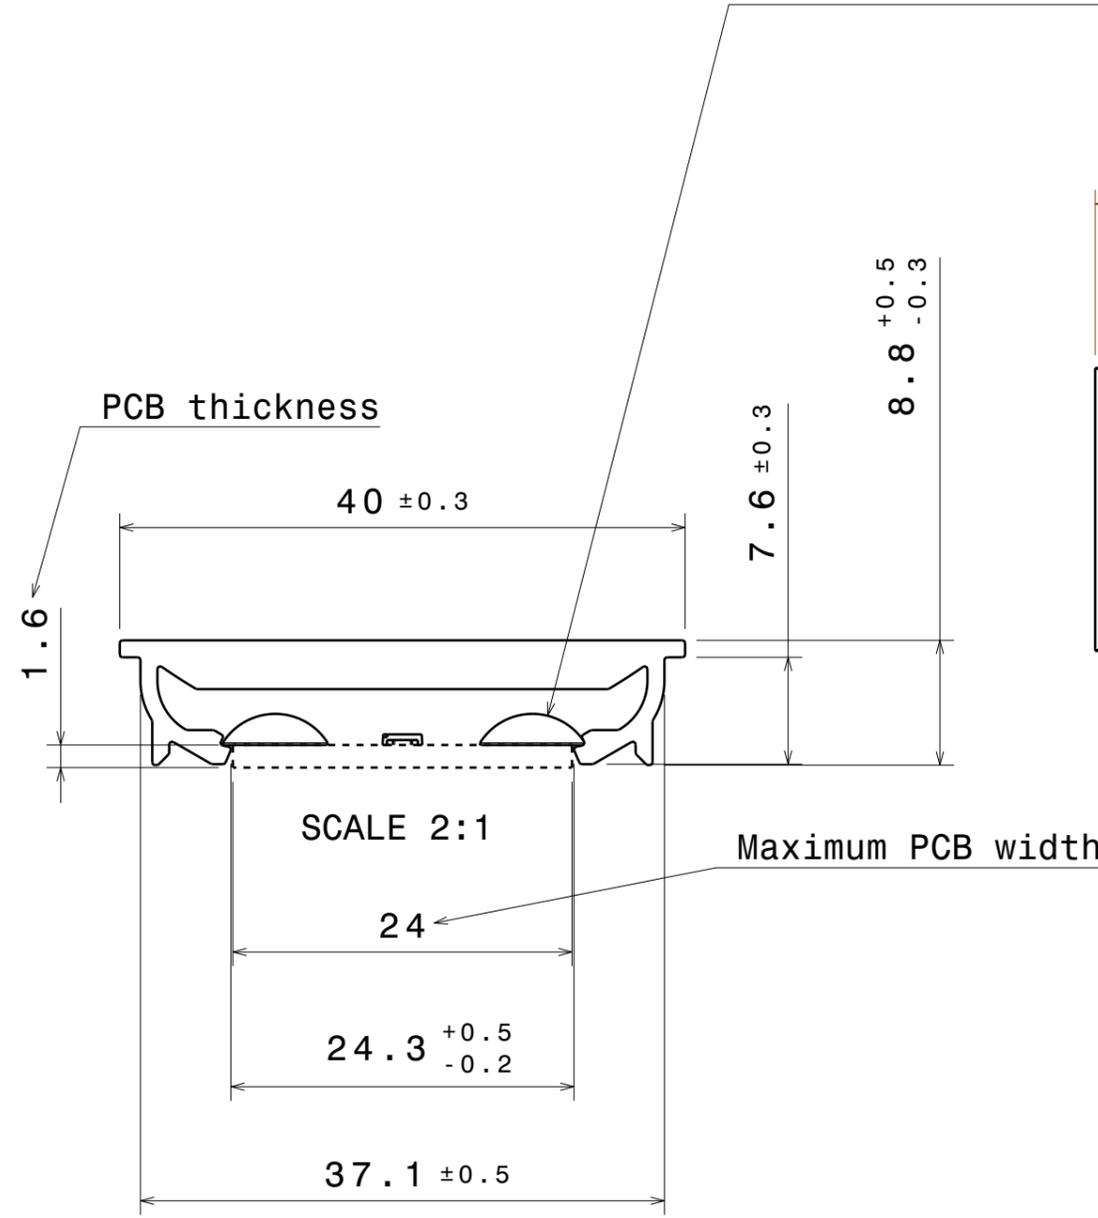

PART	TYPE	MATERIAL	COLOR / COATING
F17599_LINDA-40-WW_mechanical_LINDA-40		PMMA DF21	



<b>MECHANICAL DRAWING</b>		<b>LEDiL</b> <sup>®</sup>
PRODUCT <b>LINDA-40</b>		
FIRST ANGLE PROJECTION: 		This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 1:1	WEIGHT -	

**Notes**


	PCB or heatsink level.
	LED location
	Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
	For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>

# Assembly instructions LINDA-40 family

The lens is held in place by snapping to the PCB fixing screws. Snap the lens in place.

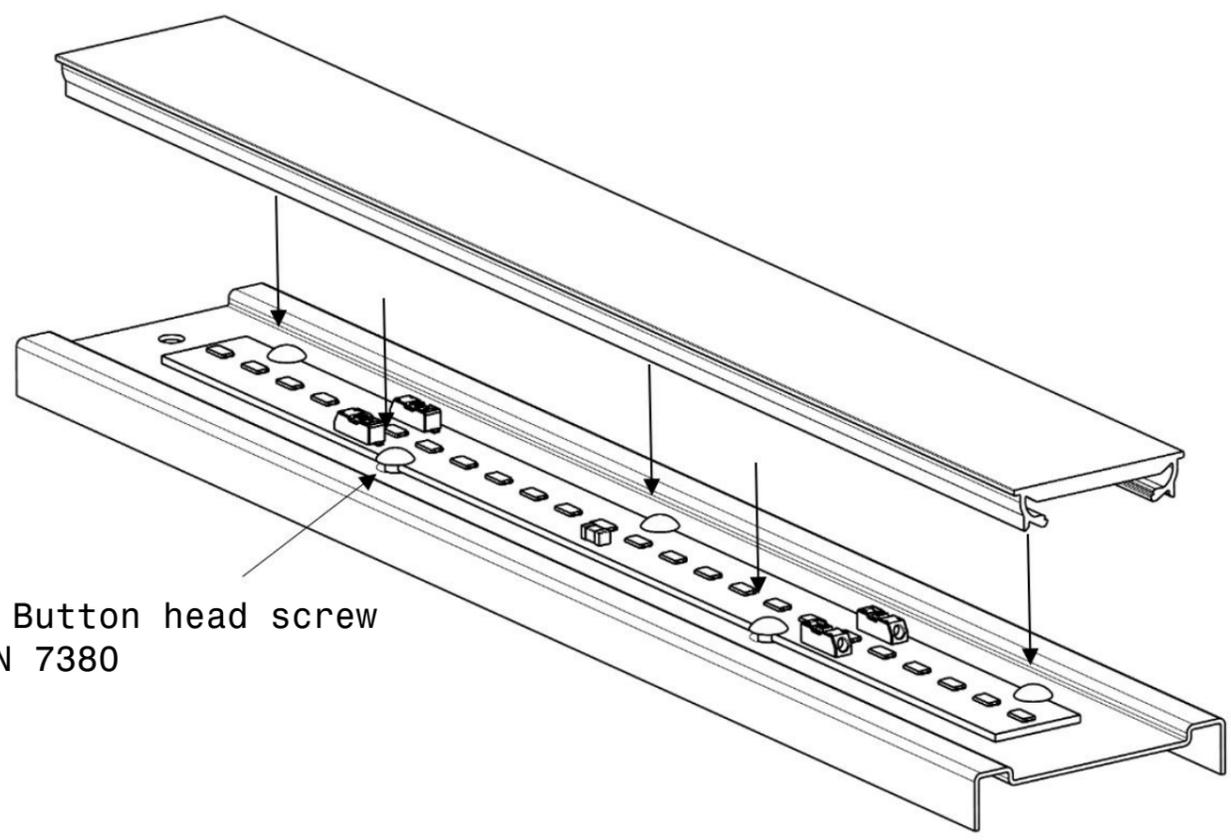

Finished assembly.

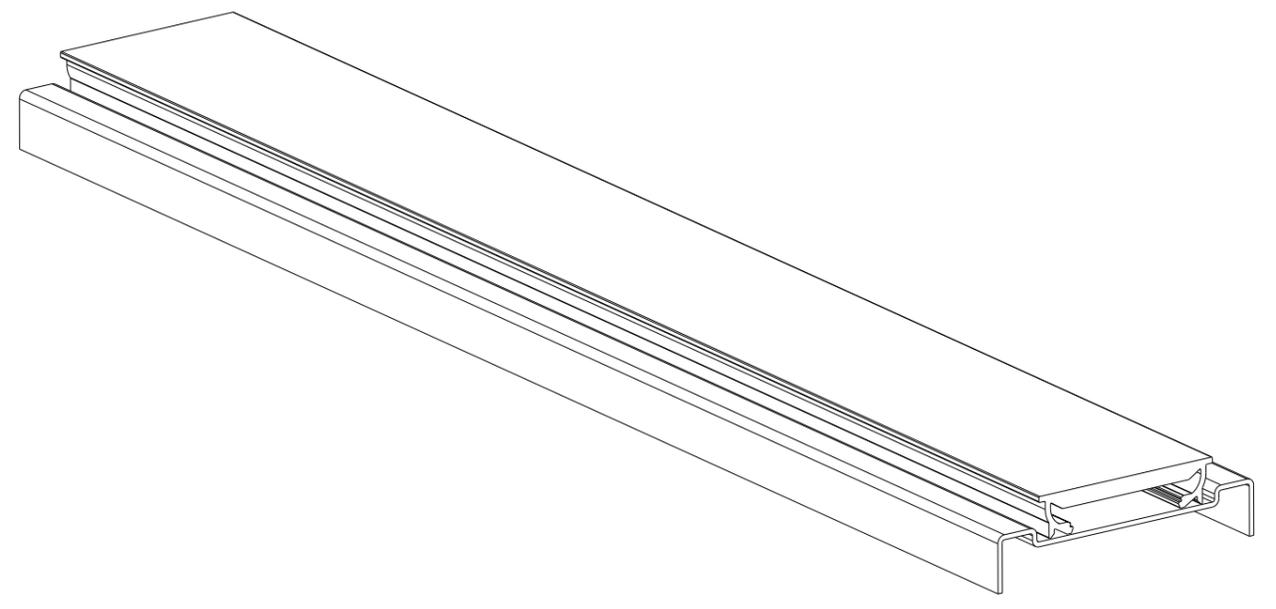

4

4

3

3

2

2

1

1