


LINDA


Seamless linear extrusion lenses with excellent optical control and innovative installation.

LINDA is an industry first linear extrusion lens family with precise light control. The optics are made of diffused PMMA for high optical efficiency with good LED source hiding power and exceptional colour-over-angle performance for an extrusion. They are easy to install by either pressing or sliding the lens into the luminaire housing and are offered in popular beam patterns. LINDA can be customized for luminaires for different lengths and is compatible with single row mid-power PCBs.

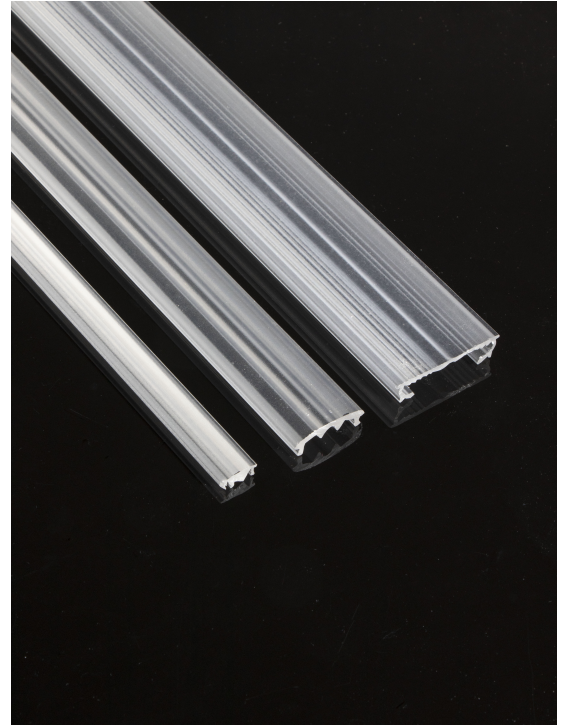

PRODUCTS:

F17201_LINDA-UP2

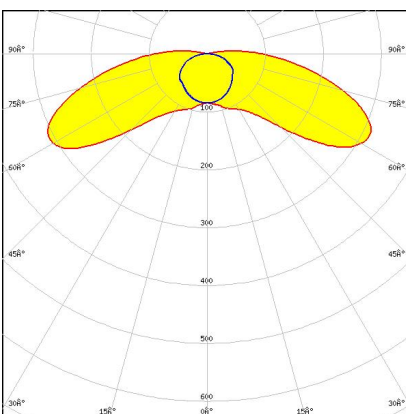


Dimensions: 25.4 mm x 1140.0 mm

Height: 11.40 mm

~165° + 130° extra wide beam for uplighting

F16748_LINDA-O

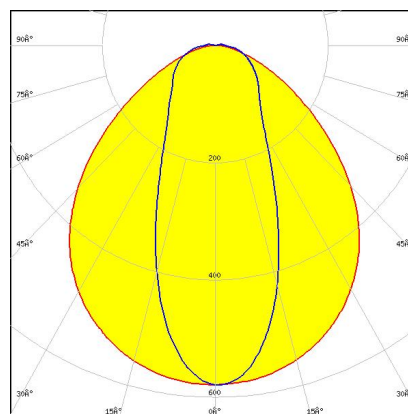


Dimensions: 25.7 mm x 1140.0 mm

Height: 4.98 mm

~40° + 100° oval beam

F17603_LINDA-40-Z2T25

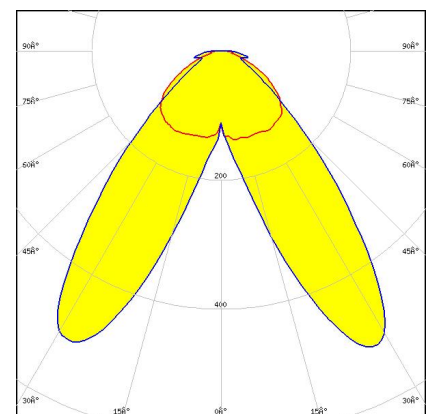


Dimensions: 40.0 mm x 1140.0 mm

Height: 8.80 mm

Double assymetric beam for aisle and shelf lighting

PRODUCTS:

F17130_LINDA-Z2T25-48in

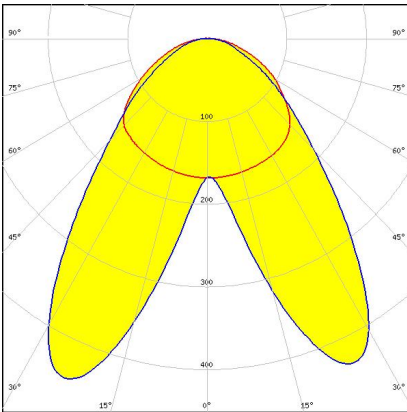


Dimensions: 25.7 mm x 1220.0 mm

Height: 5.30 mm

Double asymmetric beam for aisle and shelf lighting. 48 inches in length.

C18077_LINDA-10-F

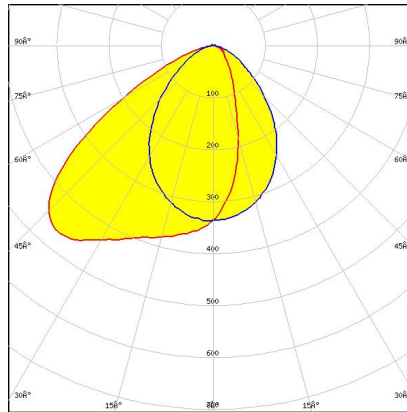


Dimensions: 12.5 mm x 1140.0 mm

Height: 5.59 mm

Asymmetric beam for undercabinet lighting

F17599_LINDA-40-WW

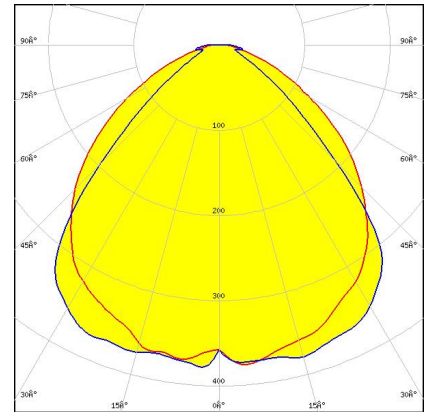


Dimensions: 40.0 mm x 1140.0 mm

Height: 8.80 mm

~90° + 110° wide beam

F16749_LINDA-WW

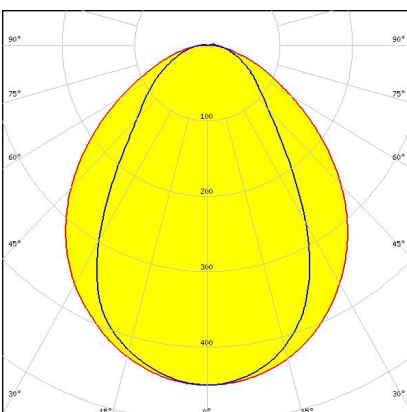


Dimensions: 25.7 mm x 1140.0 mm

Height: 5.30 mm

~70° + 100° beam

C18073_LINDA-10-O

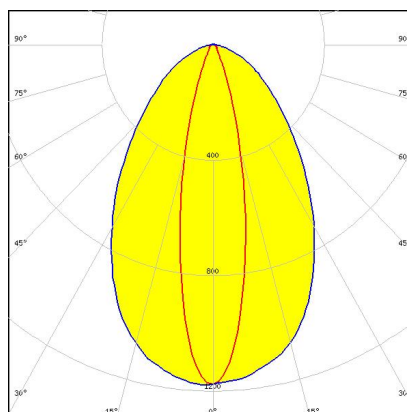


Dimensions: 12.5 mm x 1140.0 mm

Height: 7.17 mm

~35° + 85° oval beam

F17131_LINDA-ZT25-48in

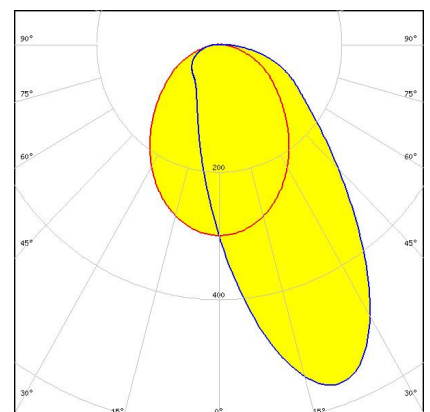


Dimensions: 25.7 mm x 1220.0 mm

Height: 6.50 mm

Asymmetric beam for wall washing. 48 inches in length.


PRODUCTS:

C18078_LINDA-10-UP

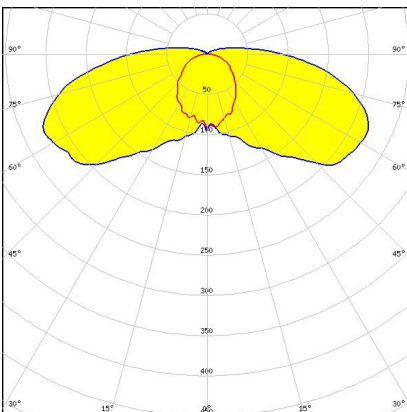


Dimensions: 12.5 mm x 1140.0 mm
Height: 10.26 mm
~145° + 100° extra wide beam for
uplighting

F17600_LINDA-40-W

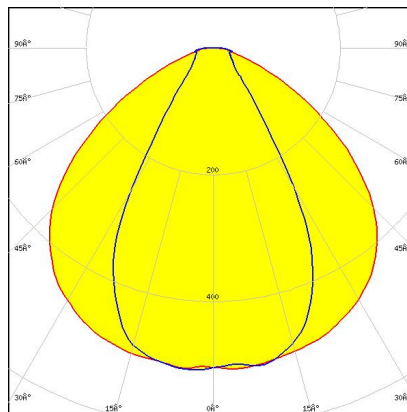


Dimensions: 40.0 mm x 1140.0 mm
Height: 8.80 mm
~60° + 110° wide beam

F16858_LINDA-Z2T25

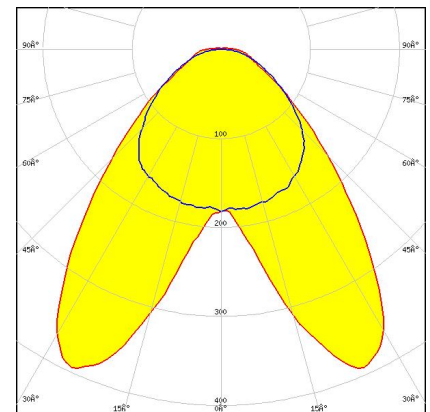


Dimensions: 25.7 mm x 1140.0 mm
Height: 5.30 mm
Double asymmetric beam for aisle
and shelf lighting

C18074_LINDA-10-M

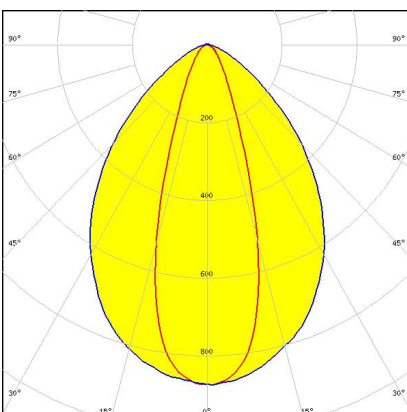


Dimensions: 12.5 mm x 1140.0 mm
Height: 5.10 mm
~40° + 85° wide beam

F17132_LINDA-UP-48in

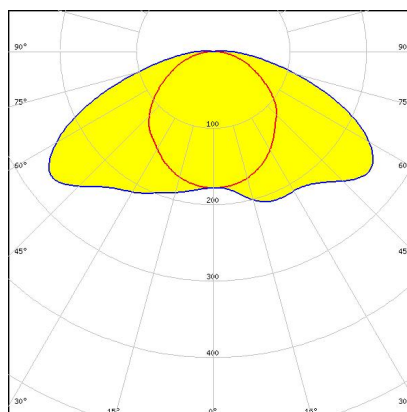

Dimensions: 25.7 mm x 1220.0 mm
Height: 7.80 mm
~145° + 100° extra wide beam for
uplighting. 48 inches in length.


F16636_LINDA-W60

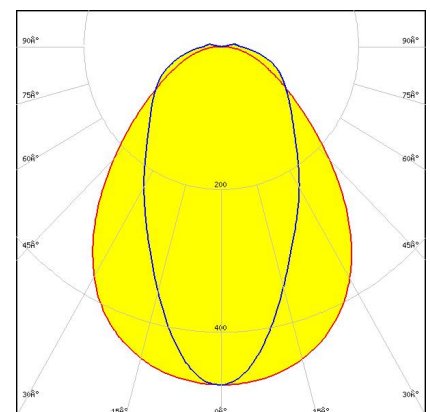

Dimensions: 23.8 mm x 1140.0 mm
Height: 6.34 mm
~60° + 90° beam


PRODUCTS:

F17601_LINDA-40-O

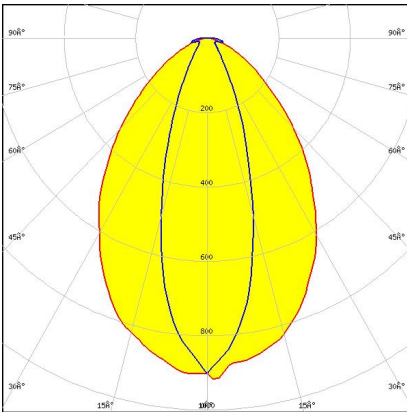


Dimensions: 40.0 mm x 1140.0 mm
Height: 8.80 mm
~86° + 40° oval beam

F16859_LINDA-ZT25

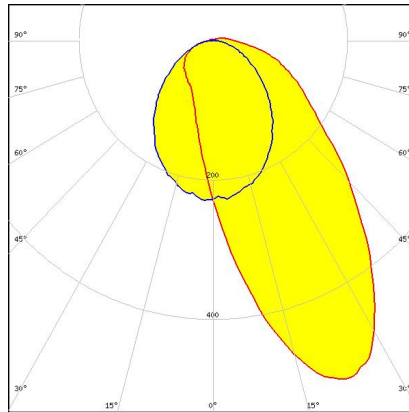


Dimensions: 25.7 mm x 1140.0 mm
Height: 6.50 mm
Asymmetric beam for wall washing

C18075_LINDA-10-W

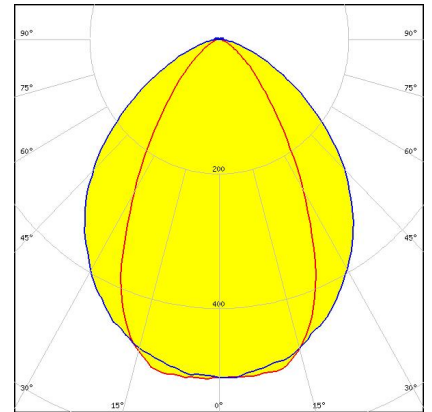


Dimensions: 12.5 mm x 1140.0 mm
Height: 5.11 mm
~55° + 95° wide beam

F17194_LINDA-WW2

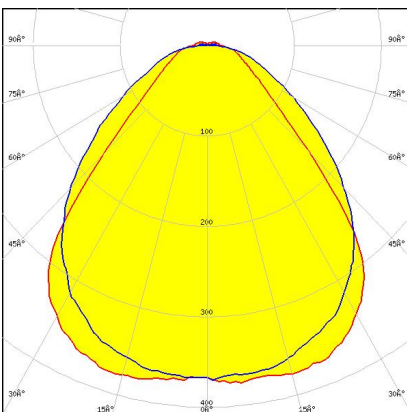


Dimensions: 25.7 mm x 1140.0 mm
Height: 5.30 mm
~90° + 100° wide beam

F16747_LINDA-WWW

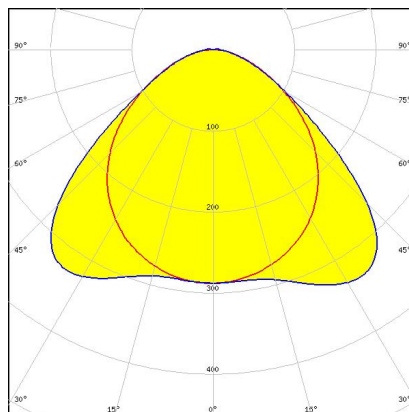

Dimensions: 25.7 mm x 1140.0 mm
Height: 6.34 mm
~110° + 100° wide beam


F17602_LINDA-40-ZT25

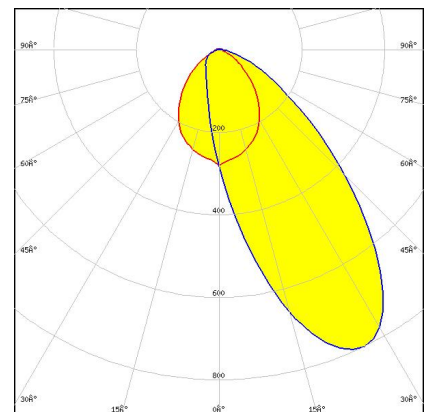

Dimensions: 40.0 mm x 1140.0 mm
Height: 8.80 mm
Asymmetric beam for wall-washing

PRODUCTS:

F16860_LINDA-UP

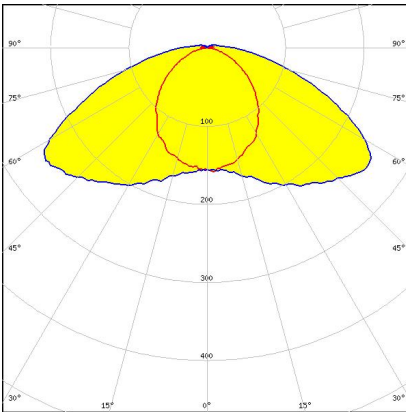


Dimensions: 25.7 mm x 1140.0 mm

Height: 7.80 mm

~145° + 100° extra wide beam for
uplighting

C18076_LINDA-10-ZT25

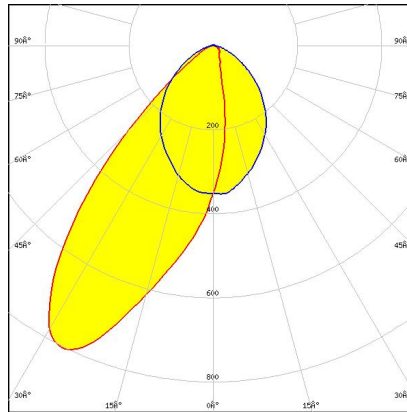

Dimensions: 12.5 mm x 1140.0 mm

Height: 6.09 mm

Asymmetric beam for wall-washing
and shelf lighting

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)