




Section View A-A

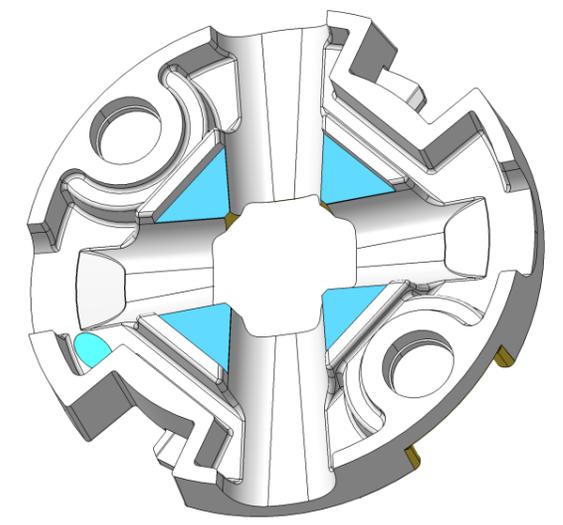

Section View B-B

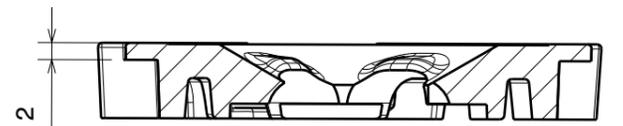

Recommended screw fastening moment (Nm):  
M2.5 = 0.3Nm  
M3.0 = 0.6Nm

	Heatsink level.
	LED location
	Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
	For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>

PART	MATERIAL	COLOR / COATING
L20107_SOCKET-B-25-M	PC	white

<b>MECHANICAL DRAWING</b>	
PRODUCT <b>HEKLA</b>	
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 
SCALE 1:1	WEIGHT 0,85g <span style="border: 1px dashed black; border-radius: 50%; padding: 2px;">11</span>

<b>LEDiL</b>	
This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.	
A3	SHEET 1/1