




Section View A-A

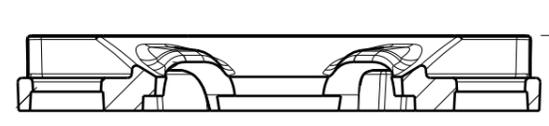

Section View B-B

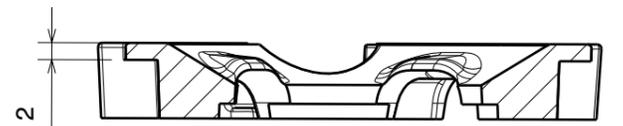

2X2 ± 0.15
space for screw head

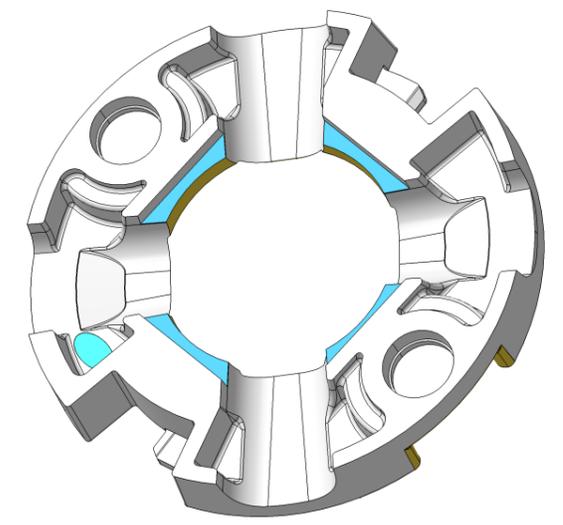

Recommended screw fastening moment (Nm):
M2.5 = 0.3Nm
M3.0 = 0.6Nm

	Heatsink level.
	LED location
	Ensure LED fitting from a product specific 3D model available from www.ledil.com
	For more details about installation please see LEDiL Installation Guide on www.ledil.com

PART	MATERIAL	COLOR / COATING
L20108_SOCKET-B-25-A	PC	white

MECHANICAL DRAWING	
PRODUCT HEKLA	
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION:
SCALE 1:1	WEIGHT 0,70g 11

LEDiL

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

A3 SHEET 1/1