

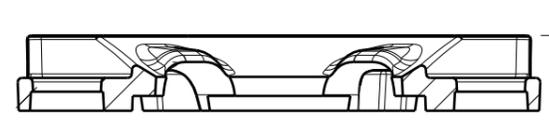


Section View A-A

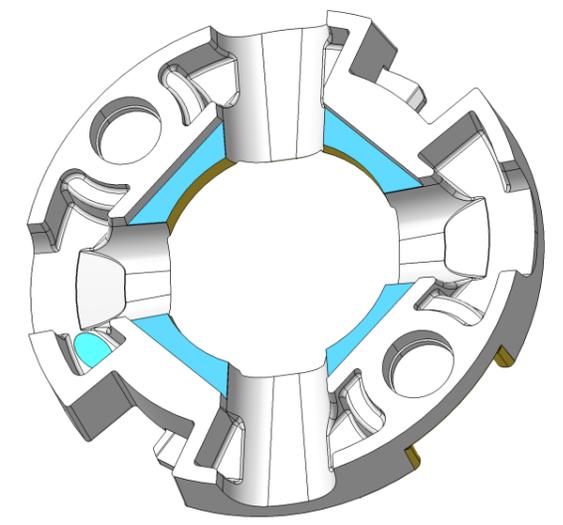

Section View B-B

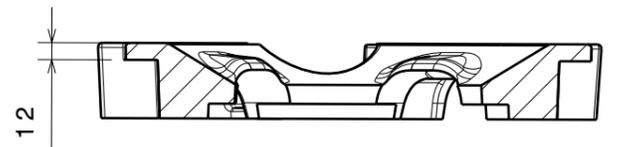

9: $2 \times 2 \pm 0.15$
 space for screw head

10: $2 \times 0.8 \pm 0.12$

PART	MATERIAL	COLOR / COATING
L20109_SOCKET-B-25-C	PC	white

Recommended screw fastening moment (Nm):
 M2.5 = 0.3Nm
 M3.0 = 0.6Nm

Notes
● Heatsink level.
● LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com
For more details about installation please see LEDiL Installation Guide on www.ledil.com

MECHANICAL DRAWING

PRODUCT **HEKLA**

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
 Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:

SCALE 1:1 WEIGHT 0,70g 11

LEDiL

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

A3 SHEET 1/1