

## SPORT-2X2-FT6W

Wide forward throw beam with optimized cut-off  
for high masts

## SPECIFICATION:

Dimensions	50.0 x 50.0
Height	11.1 mm
Fastening	screw
ROHS compliant	yes ⓘ




## MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
SPORT-2X2-FT6W	Multi-lens	PMMA	clear		

## ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C17409_SPORT-2X2-FT6W » Box size: 480 x 280 x 300 mm	640	128	128	9.9

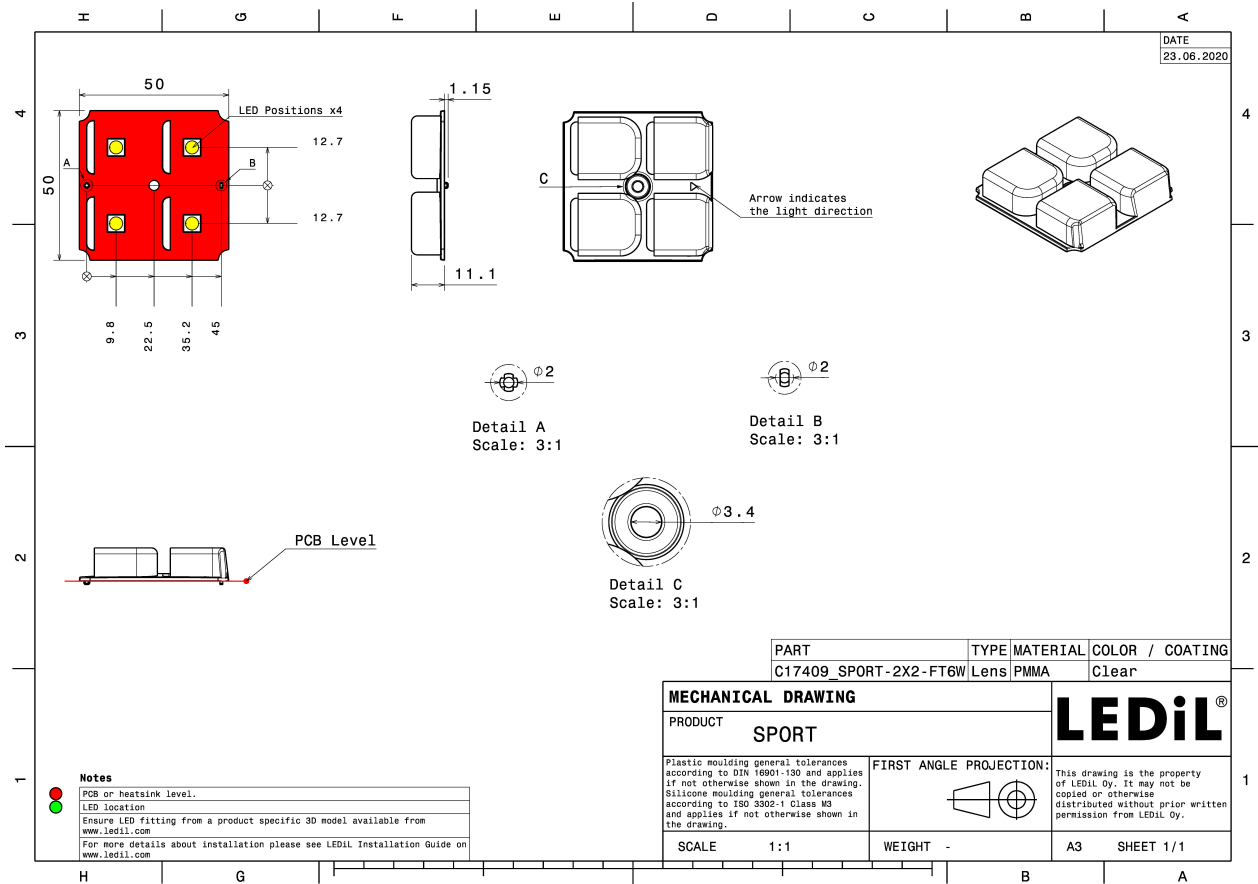


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ C 3030  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 1.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

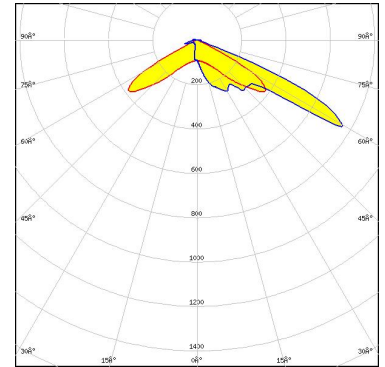

Light distribution files

**TEPCOMP**  
group


LED PassivePAQ-R-222x50.OS1.9.7K-750-5 V1.0  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

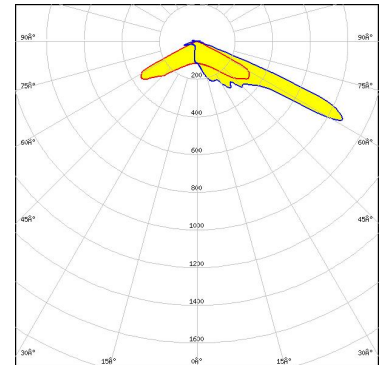

Light distribution files

**TEPCOMP**  
group

LED PassivePAQ-R-274x51-NI0-21K-857-5  
FWHM / FWTM Asymmetric  
Efficiency 96 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

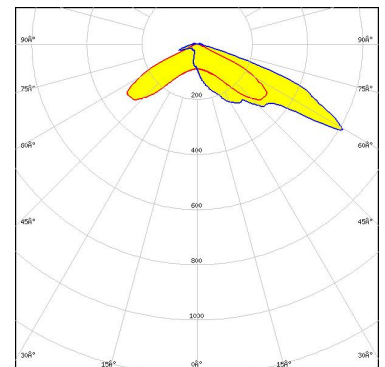

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED J Series 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

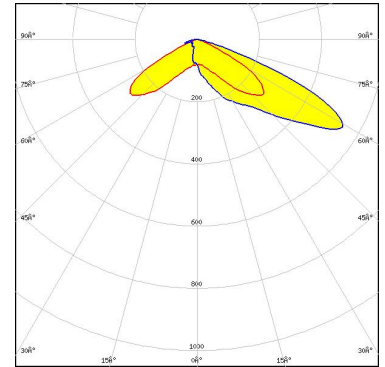


LED J Series 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

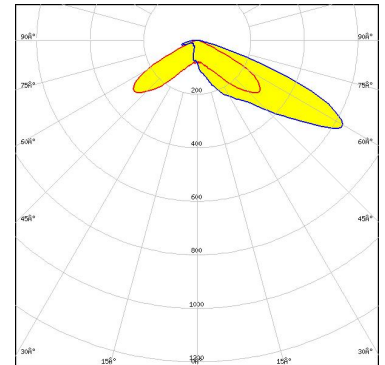

LED J Series 5050B 6V K Class  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

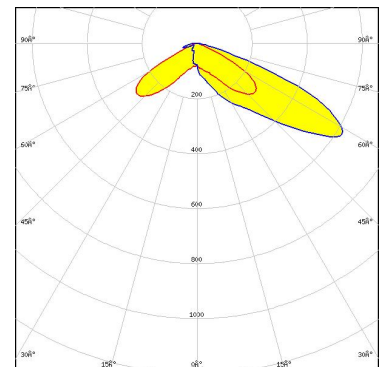




#### OPTICAL RESULTS (SIMULATED):




LED J Series 5050C 6V E Class  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

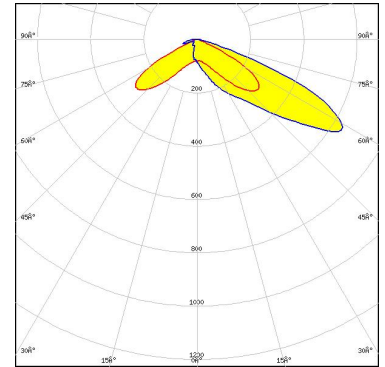

Light distribution files




LED XHP35.2 HD  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

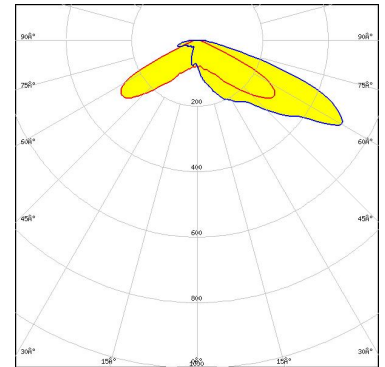

Light distribution files



LED XHP35.2 HD  
 FWHM / FWTM Asymmetric  
 Efficiency 76 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

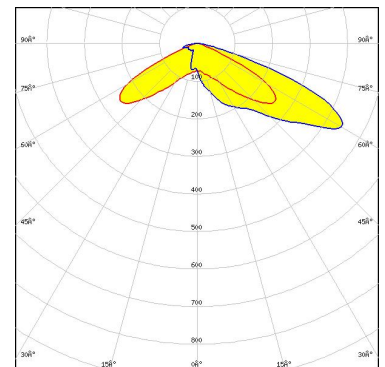


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):



LED XHP35.2 HI  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

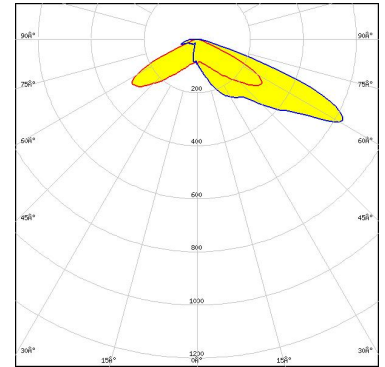

Light distribution files




LED XHP35.2 HI  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass

Light distribution files



LED XP-G2 HE  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

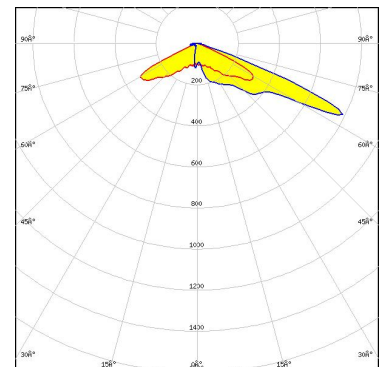


Light distribution files

#### OPTICAL RESULTS (SIMULATED):



LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 76 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

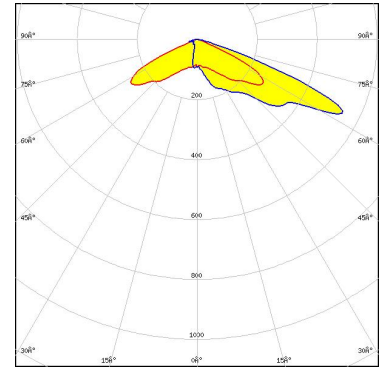

Light distribution files




LED XP-G4  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

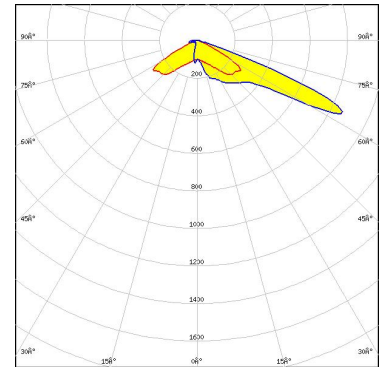

Light distribution files



LED XP-G4 HI  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

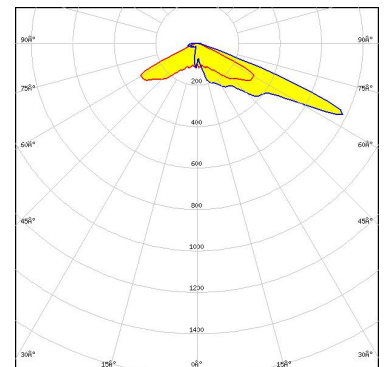


Light distribution files

### OPTICAL RESULTS (SIMULATED):



LED	XP-G4 HI
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

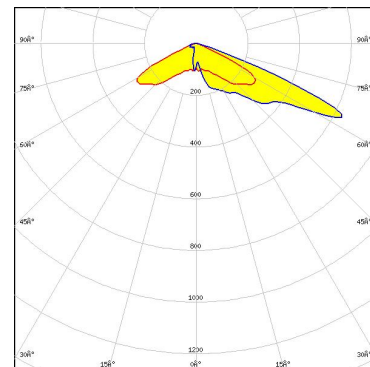


## Light distribution files




LED	XP-L HD
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

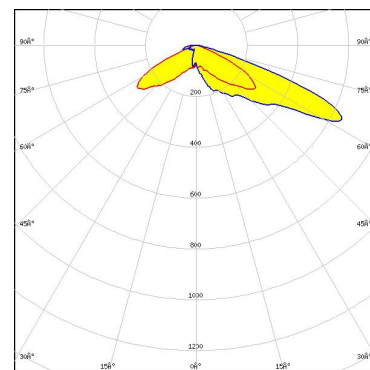

LED	XP-L HD
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

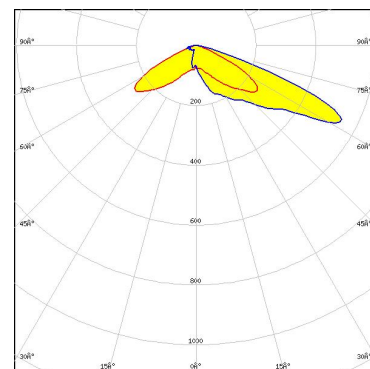

## Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED XP-L HI  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

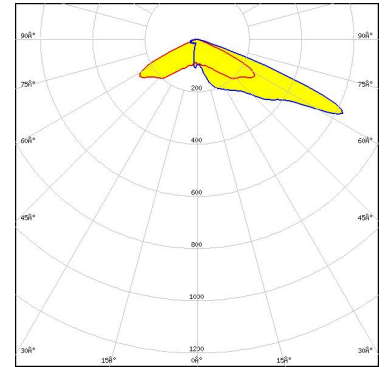


LED XP-L HI  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

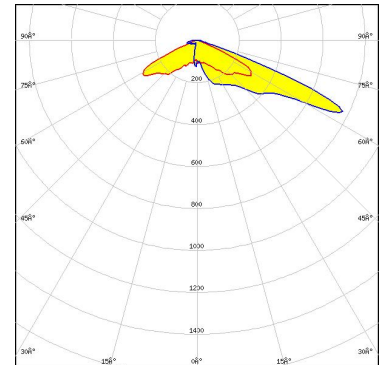

LED XP-L2  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

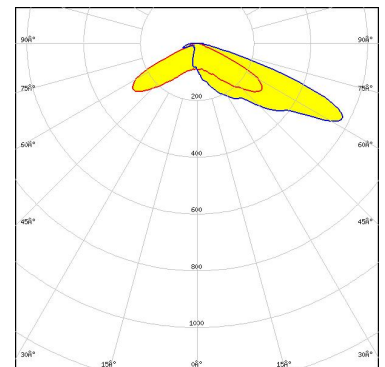


#### OPTICAL RESULTS (SIMULATED):



LED XP-L2  
 FWHM / FWTM Asymmetric  
 Efficiency 75 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

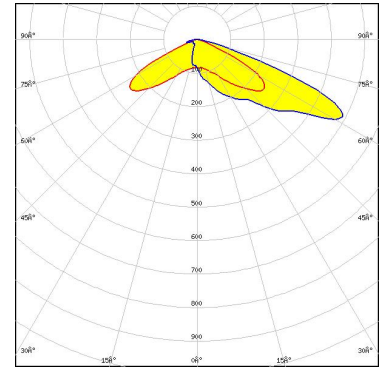

LED XP-P  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

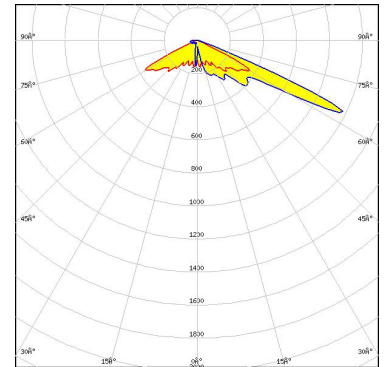

LED XP-P  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

Light distribution files

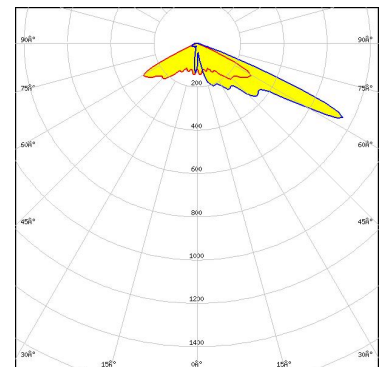


#### OPTICAL RESULTS (SIMULATED):



LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

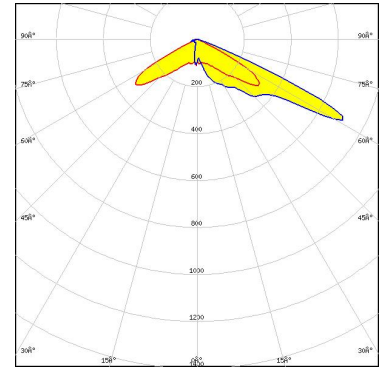


Light distribution files



LED LUXEON 5050 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

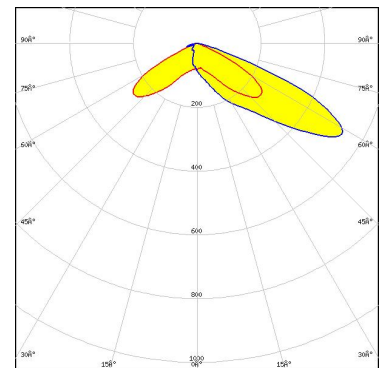

Light distribution files



LED LUXEON 5050 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

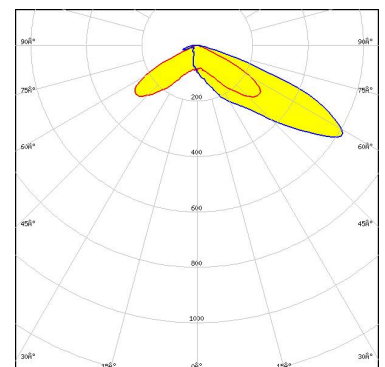

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

Light distribution files

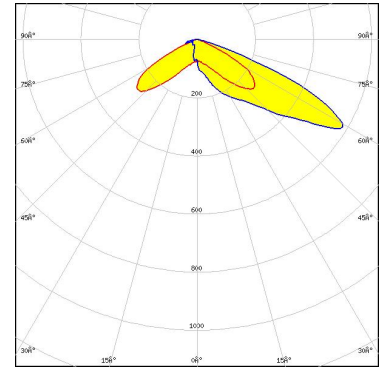

LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

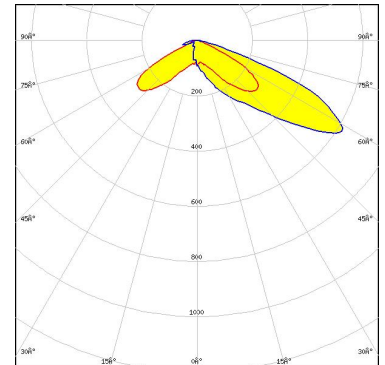

LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

Light distribution files

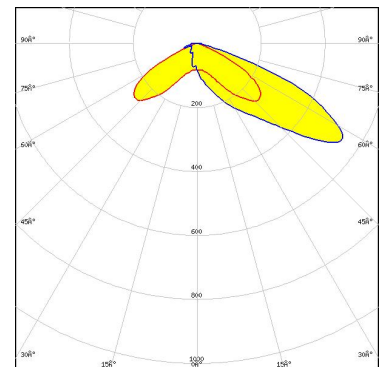




#### OPTICAL RESULTS (SIMULATED):





LED LUXEON HL2X  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

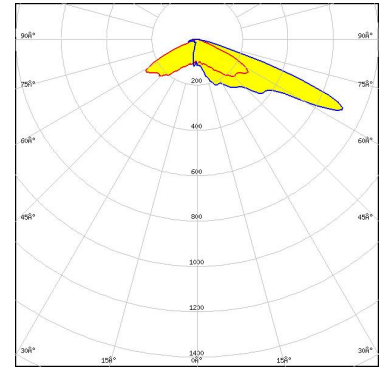

Light distribution files




LED LUXEON HL2X-E  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

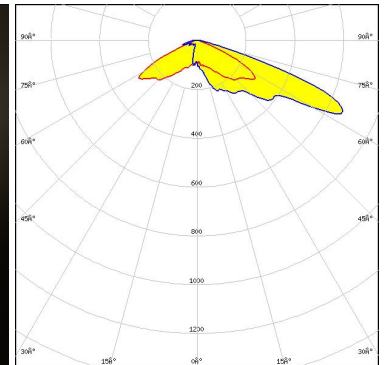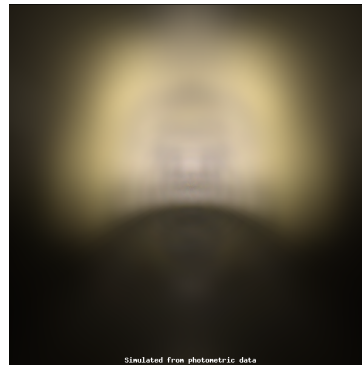

Light distribution files



LED LUXEON HL2X-E  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

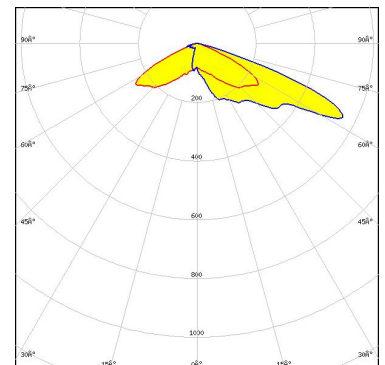

Protective plate, glass


Light distribution files

#### OPTICAL RESULTS (SIMULATED):



LED LUXEON HL4X  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

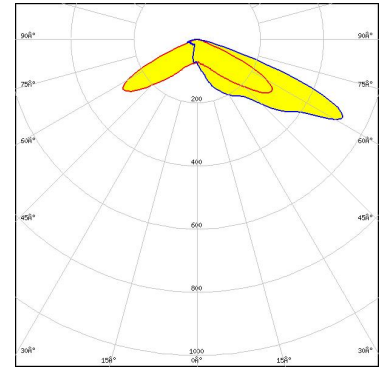

Light distribution files



LED LUXEON HL4X  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

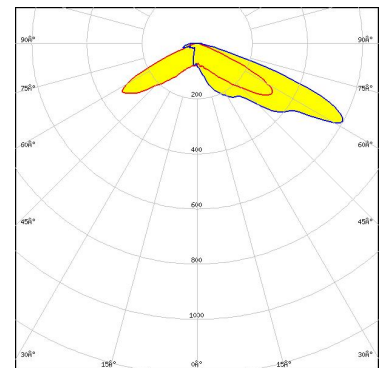


Light distribution files



LED LUXEON HL4Z  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

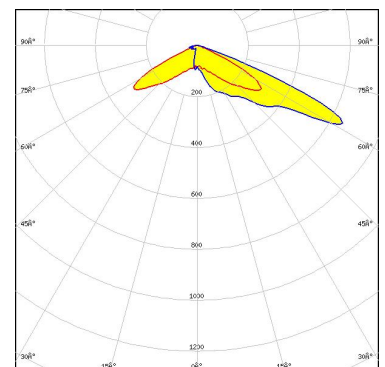


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON HL4Z  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

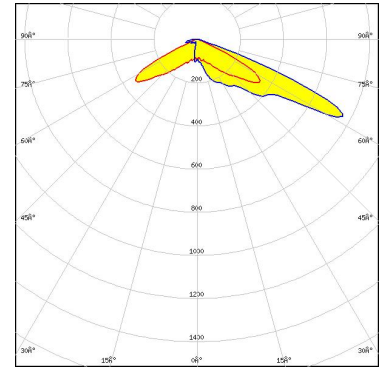

Light distribution files




LED LUXEON TX  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

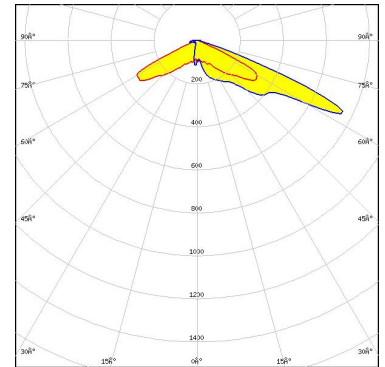

Light distribution files



LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

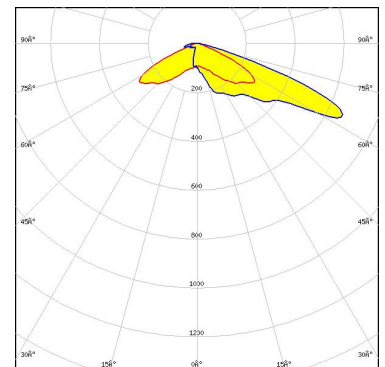

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED	LUXEON XR-HL2X (L2H2-xxxxxxMLU010)
FWHM / FWTM	Asymmetric
Efficiency	78 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


Protective plate, glass

Light distribution files

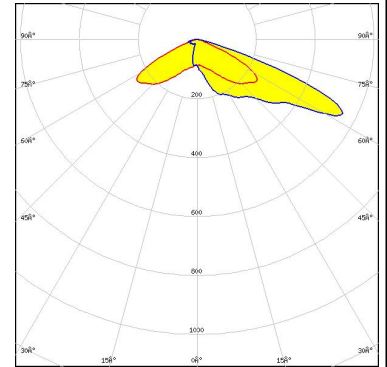

LED	SFT-12R-W-A
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	


Light distribution files

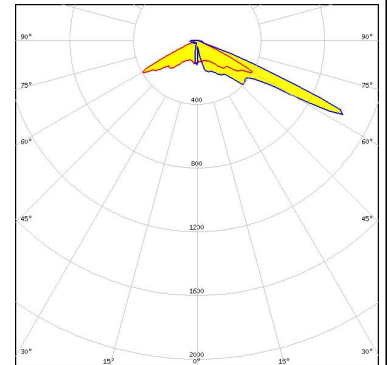

LED	SFT-12R-W-A
FWHM / FWTM	Asymmetric
Efficiency	83 %
Peak intensity	1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

Light distribution files

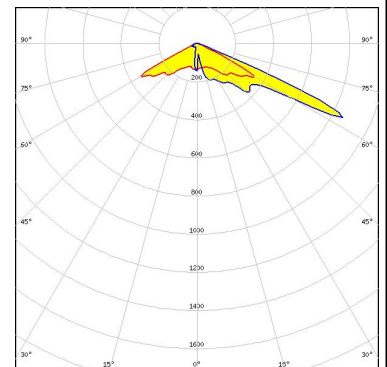


#### OPTICAL RESULTS (SIMULATED):



LED SST-20 Gen1  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

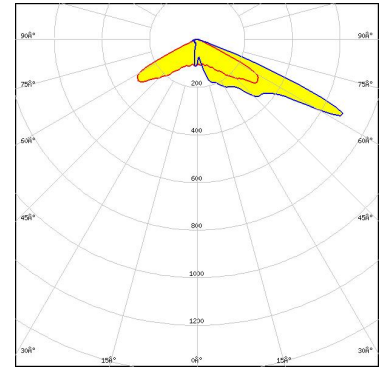

Light distribution files



LED SST-20F-W  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

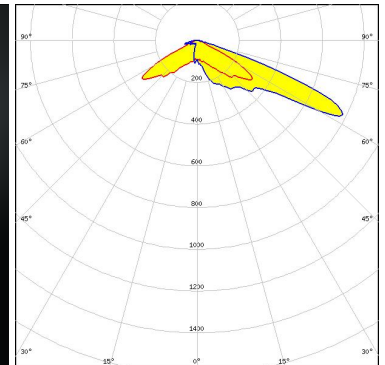


Light distribution files



LED SST-20F-W  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


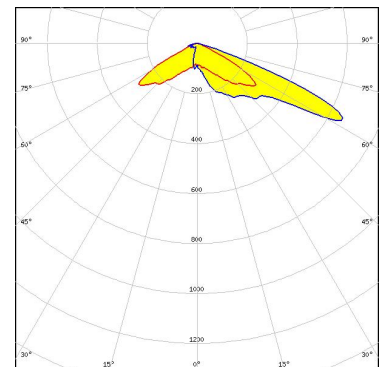


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED SST-25-W  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

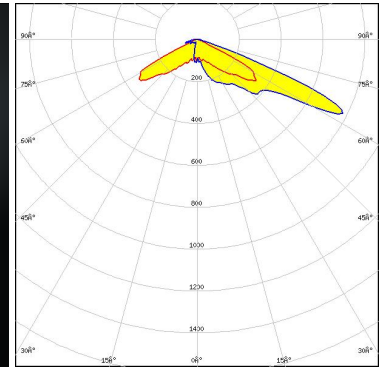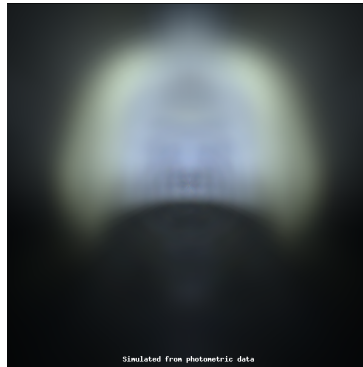

Light distribution files



LED SST-25-W  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


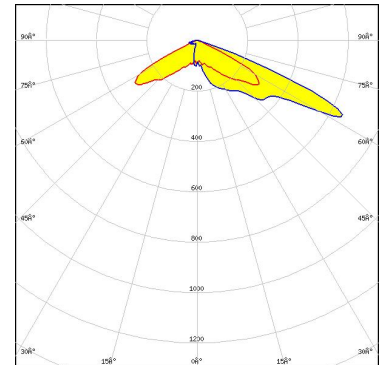


Protective plate, glass

Light distribution files



LED SST-36F-W  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

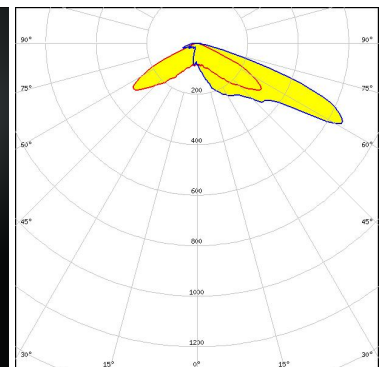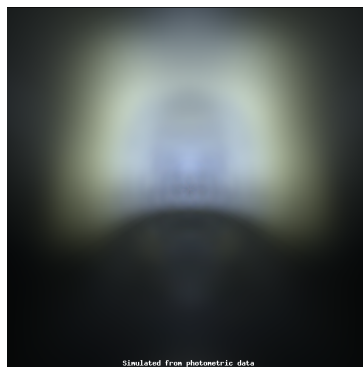

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED SST-36F-W  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

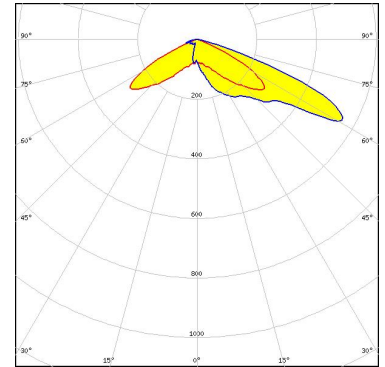

LED NF2x757G  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

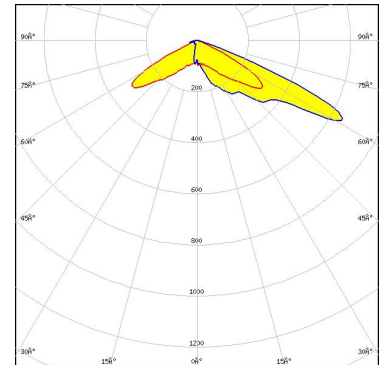

LED NFSx757G  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

Light distribution files

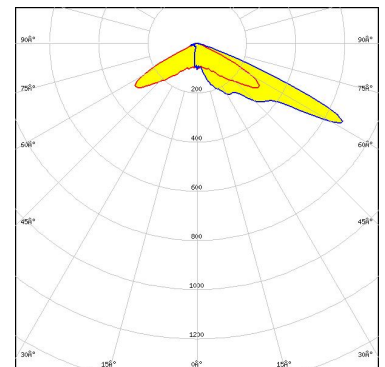




#### OPTICAL RESULTS (SIMULATED):




LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

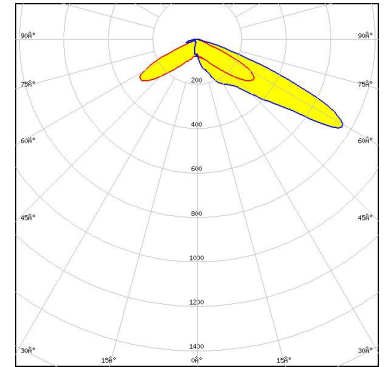

Light distribution files



LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

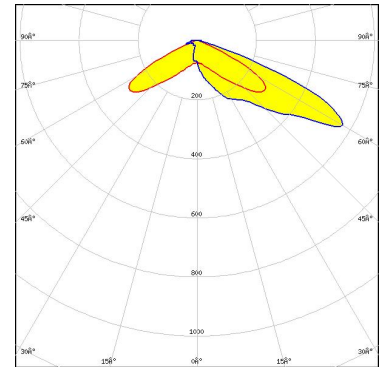


Light distribution files

Protective plate, glass



LED NVSW219D  
 FWHM / FWTM Asymmetric  
 Efficiency 76 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

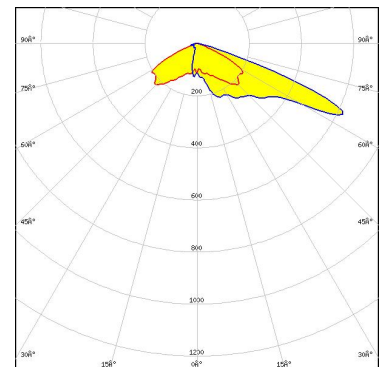

Light distribution files

Protective plate, glass




#### OPTICAL RESULTS (SIMULATED):



LED NVSW219F  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

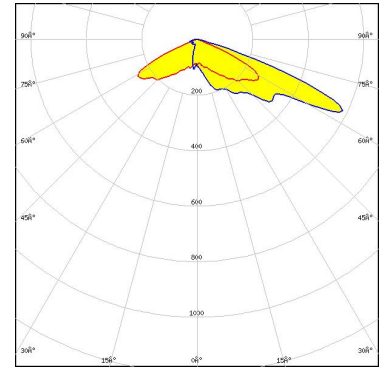

Light distribution files



LED Duris S8  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

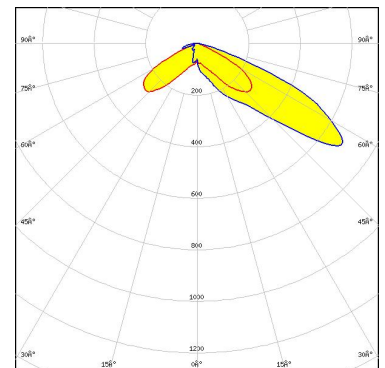


Light distribution files



LED Duris S8  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

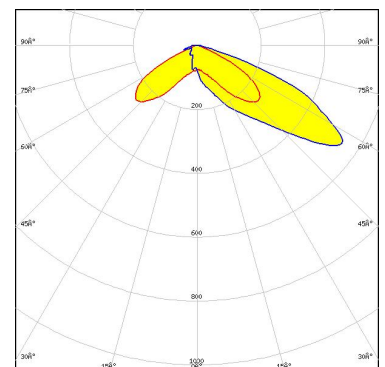


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ C 2424  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

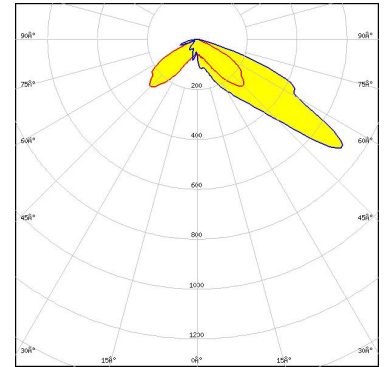

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSCONIQ C 3030  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

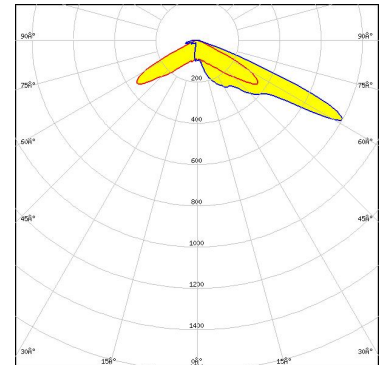

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSCONIQ C 3030  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

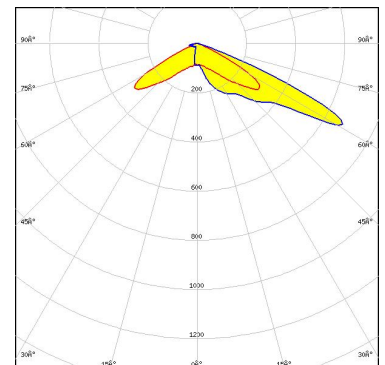

Protective plate, glass

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (2W version)  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass

Light distribution files

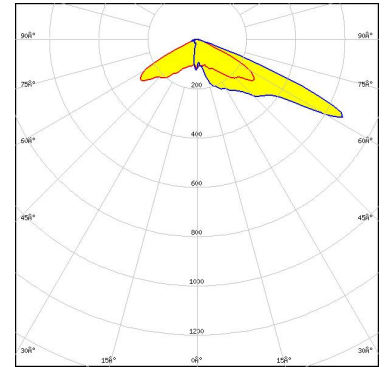


**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (3W version)  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

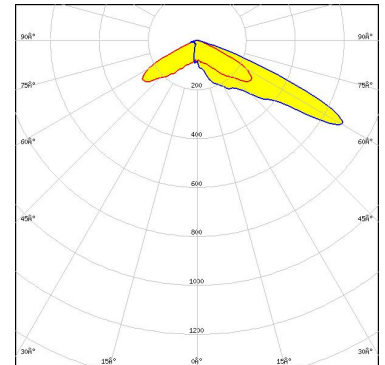

**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 Flat  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files

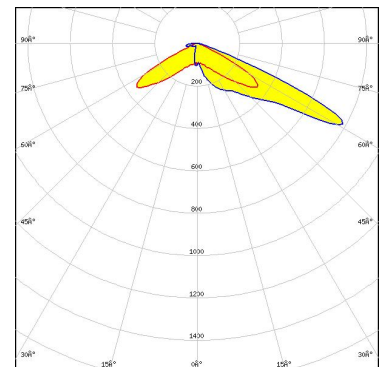


#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED: OSCONIQ S 5050  
FWHM / FWTM: Asymmetric  
Efficiency: 81 %  
Peak intensity: 0.6 cd/lm  
LEDs/each optic: 1  
Light colour/type: White  
Required components:

Protective plate, glass


Light distribution files

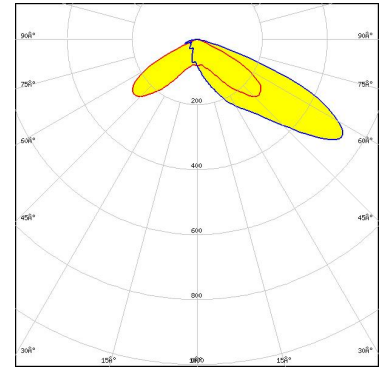

**OSRAM**  
Opto Semiconductors

LED: OSCONIQ S 5050  
FWHM / FWTM: Asymmetric  
Efficiency: 94 %  
Peak intensity: 0.8 cd/lm  
LEDs/each optic: 1  
Light colour/type: White  
Required components:

Light distribution files

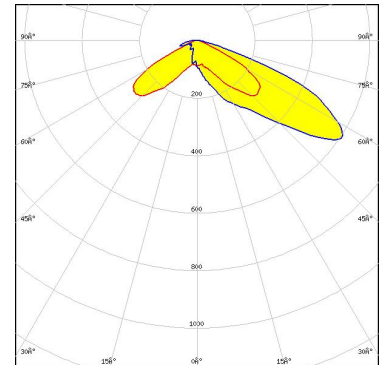


**OSRAM**  
Opto Semiconductors

LED: OSLOM Square CSSRM2/CSSRM3  
FWHM / FWTM: Asymmetric  
Efficiency: 85 %  
Peak intensity: 0.8 cd/lm  
LEDs/each optic: 1  
Light colour/type: White  
Required components:

Protective plate, glass


Light distribution files

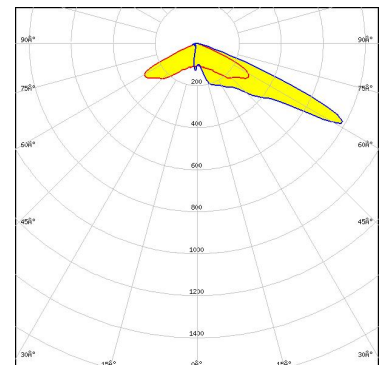

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

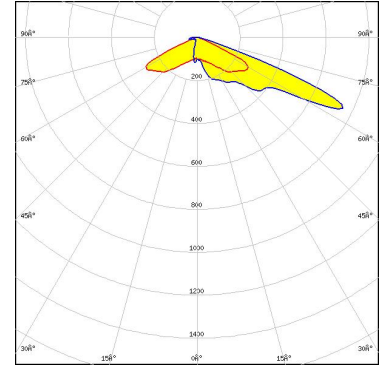

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

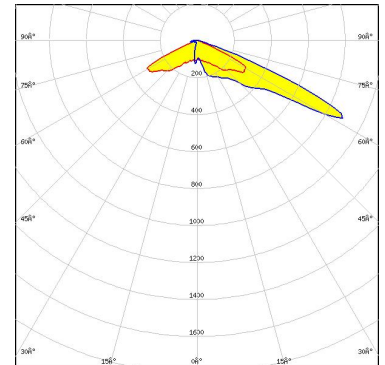

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 76 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

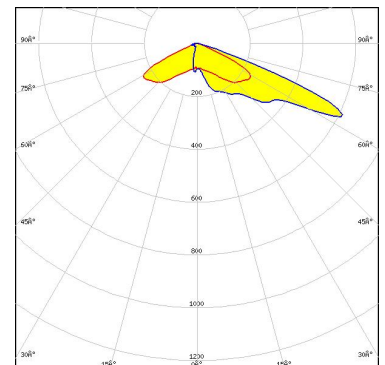


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square Flat  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

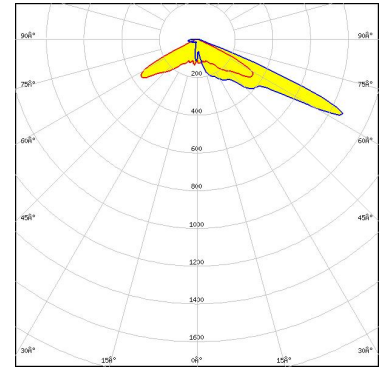

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSTAR Projection Compact (KW.CSLNM1.TG)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

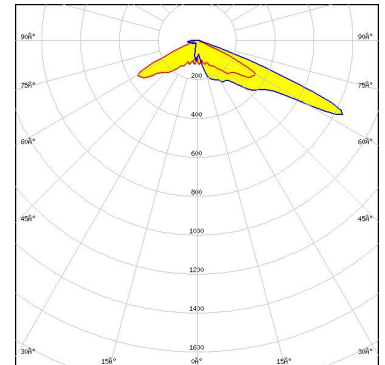

Light distribution files

**SAMSUNG**

LED LH351B  
FWHM / FWTM Asymmetric  
Efficiency 77 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

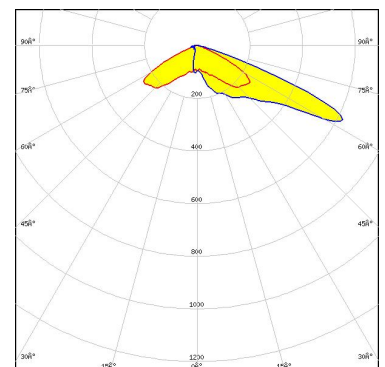

Protective plate, glass

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG

LED LH351C  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

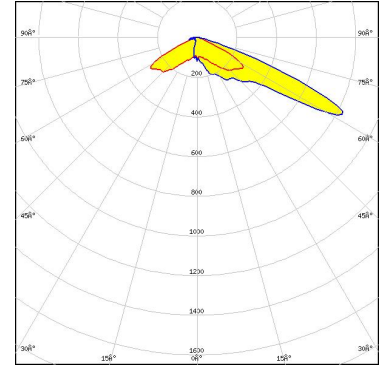

### SAMSUNG

LED LH351D  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

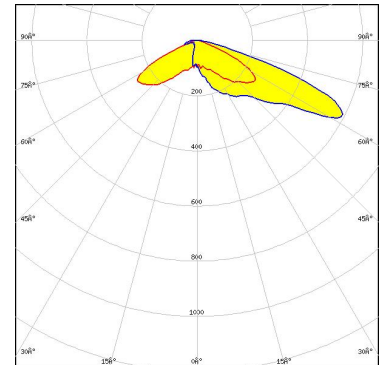


### SAMSUNG

LED LH351D  
 FWHM / FWTM Asymmetric  
 Efficiency 77 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

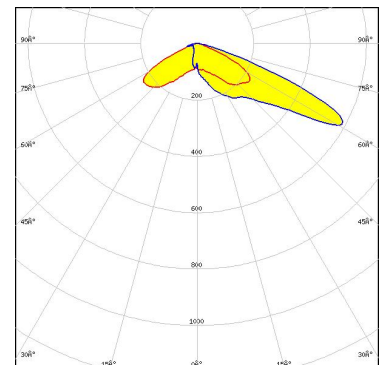

#### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG


LED LH502C  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

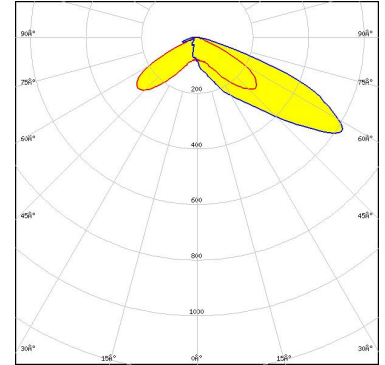

Light distribution files

#### SAMSUNG

LED LH502C  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

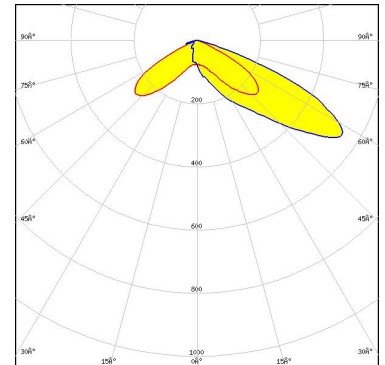


Light distribution files

Protective plate, glass



LED MJT 5050  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


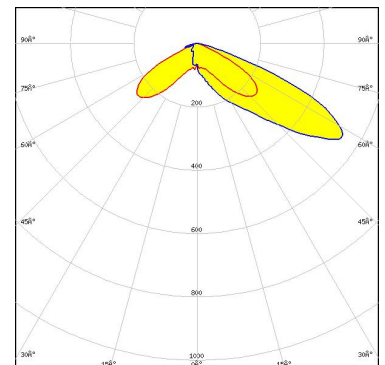


Light distribution files

Protective plate, glass




#### OPTICAL RESULTS (SIMULATED):

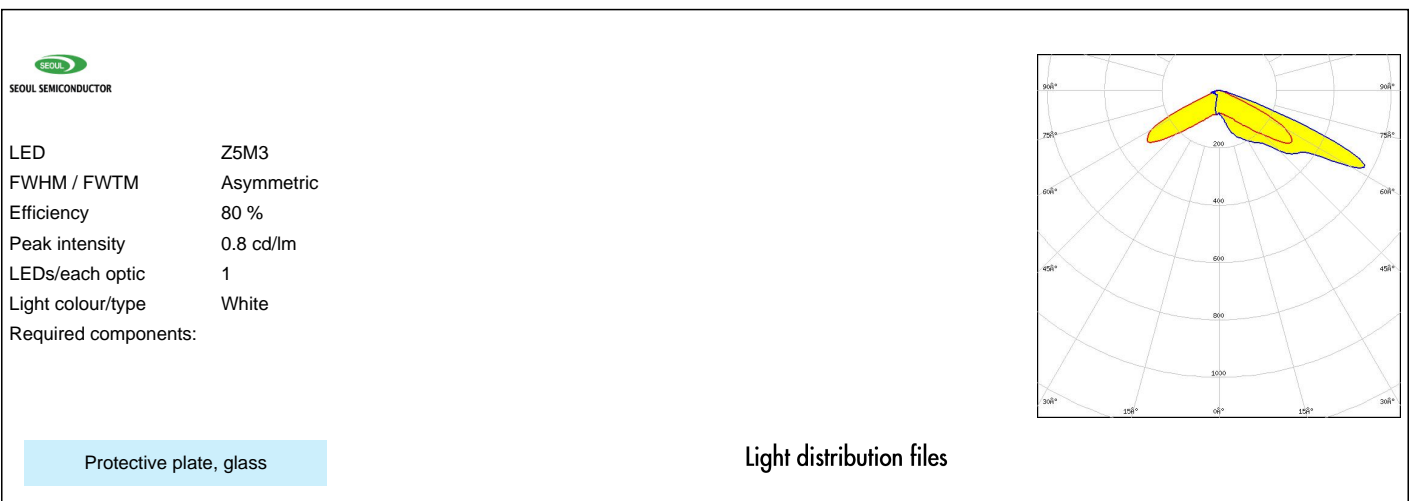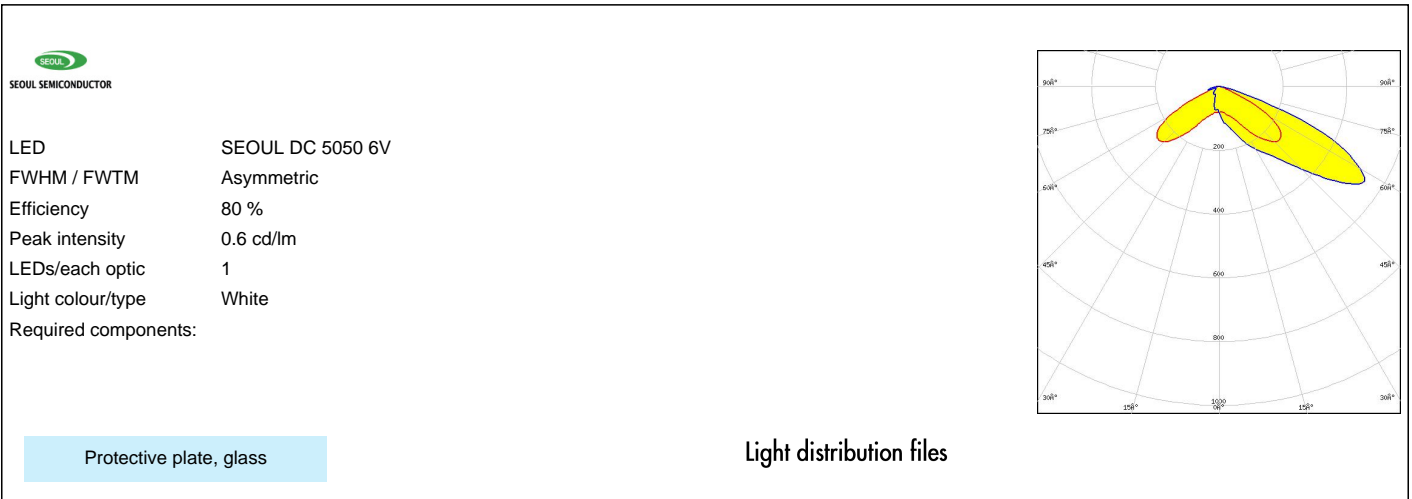

#### OPTICAL RESULTS (SIMULATED):




LED Z5M4  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

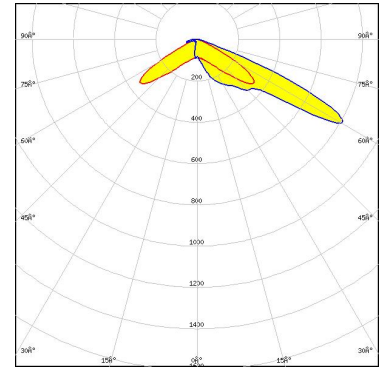

Light distribution files



LED Z5M4  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

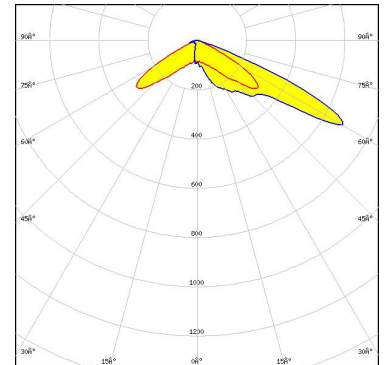


Light distribution files

Protective plate, glass



LED Z5M4-E1  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

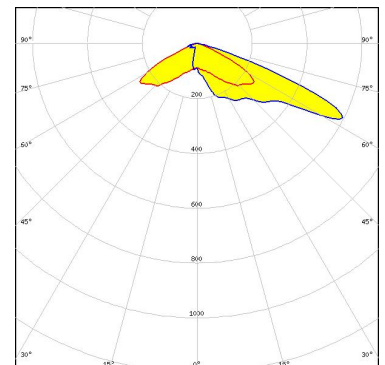


Light distribution files

Protective plate, glass

#### OPTICAL RESULTS (SIMULATED):





LED Z5M4-E1  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

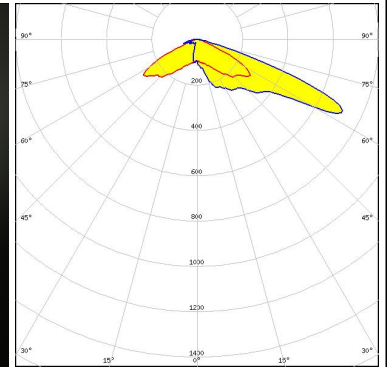

Light distribution files




LED Z5M4-E2  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

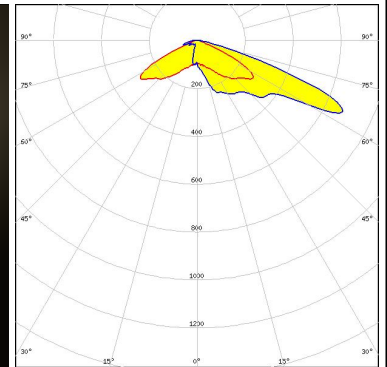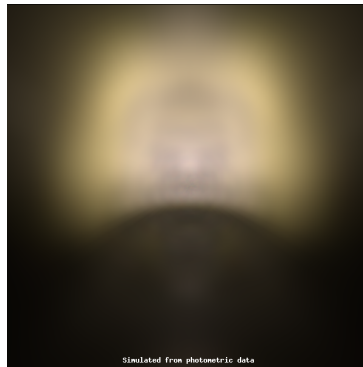

Light distribution files



LED Z5M4-E2  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

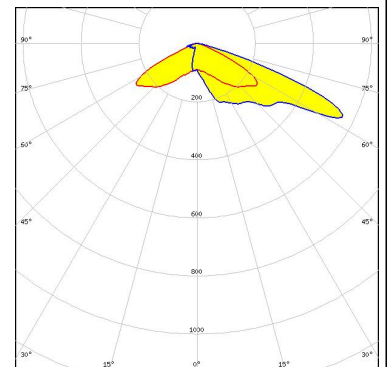


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED Z5M5  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

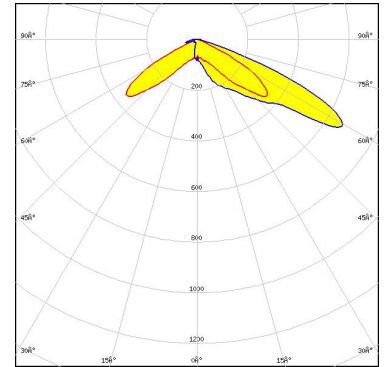

Light distribution files



LED Z5M5  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

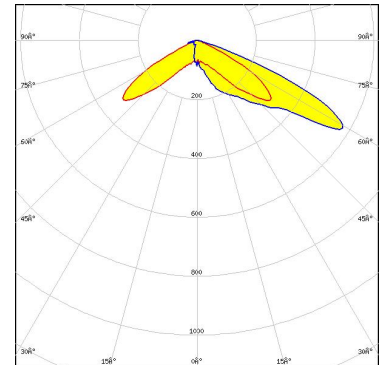


Light distribution files

Protective plate, glass

#### TRIDONIC

LED RLE 2x8 6000lm HP HE EXC3 OTD  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

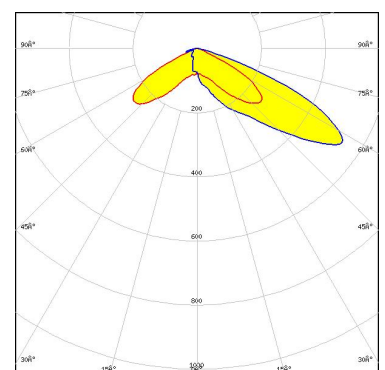

Light distribution files

Protective plate, glass

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 7  
FI-24100 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)