



Elongated hole shape recommended for minus location pin

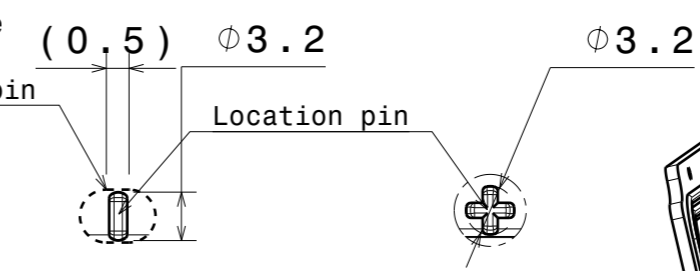

Detail A  
Scale: 2:1


Detail B  
Scale: 2:1

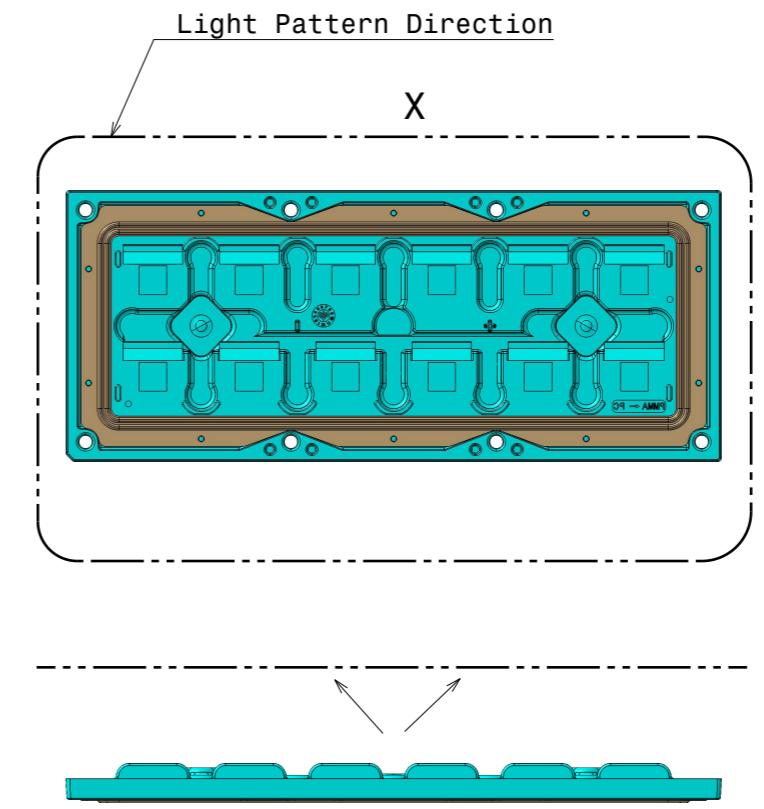

- Notes**
- PCB level
  - Heat sink level
  - Led location
- For more details about compatible LEDs please check measured results on [www.ledil.com](http://www.ledil.com) and 3D model for more detailed mechanical information  
See installation details page 2.


COMPONENTS				
INDEX	PRODUCT	TYPE	MATERIAL	COLOUR/COATING
1	C15218_STRADA-IP-2X6-T2-C-90	LENS	PMMA	CLEAR
2	C14018_2X6-SEAL25	SEAL	SILICONE	WHITE

MECHANICAL DRAWING			<b>LEDiL</b> <sup>®</sup>		
PRODUCT CS15223_STRADA-IP-2X6-T2-C-90					This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.
Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L	FIRST ANGLE PROJECTION: 				
SCALE	1:2	SIZE	A3	SHEET	1/2

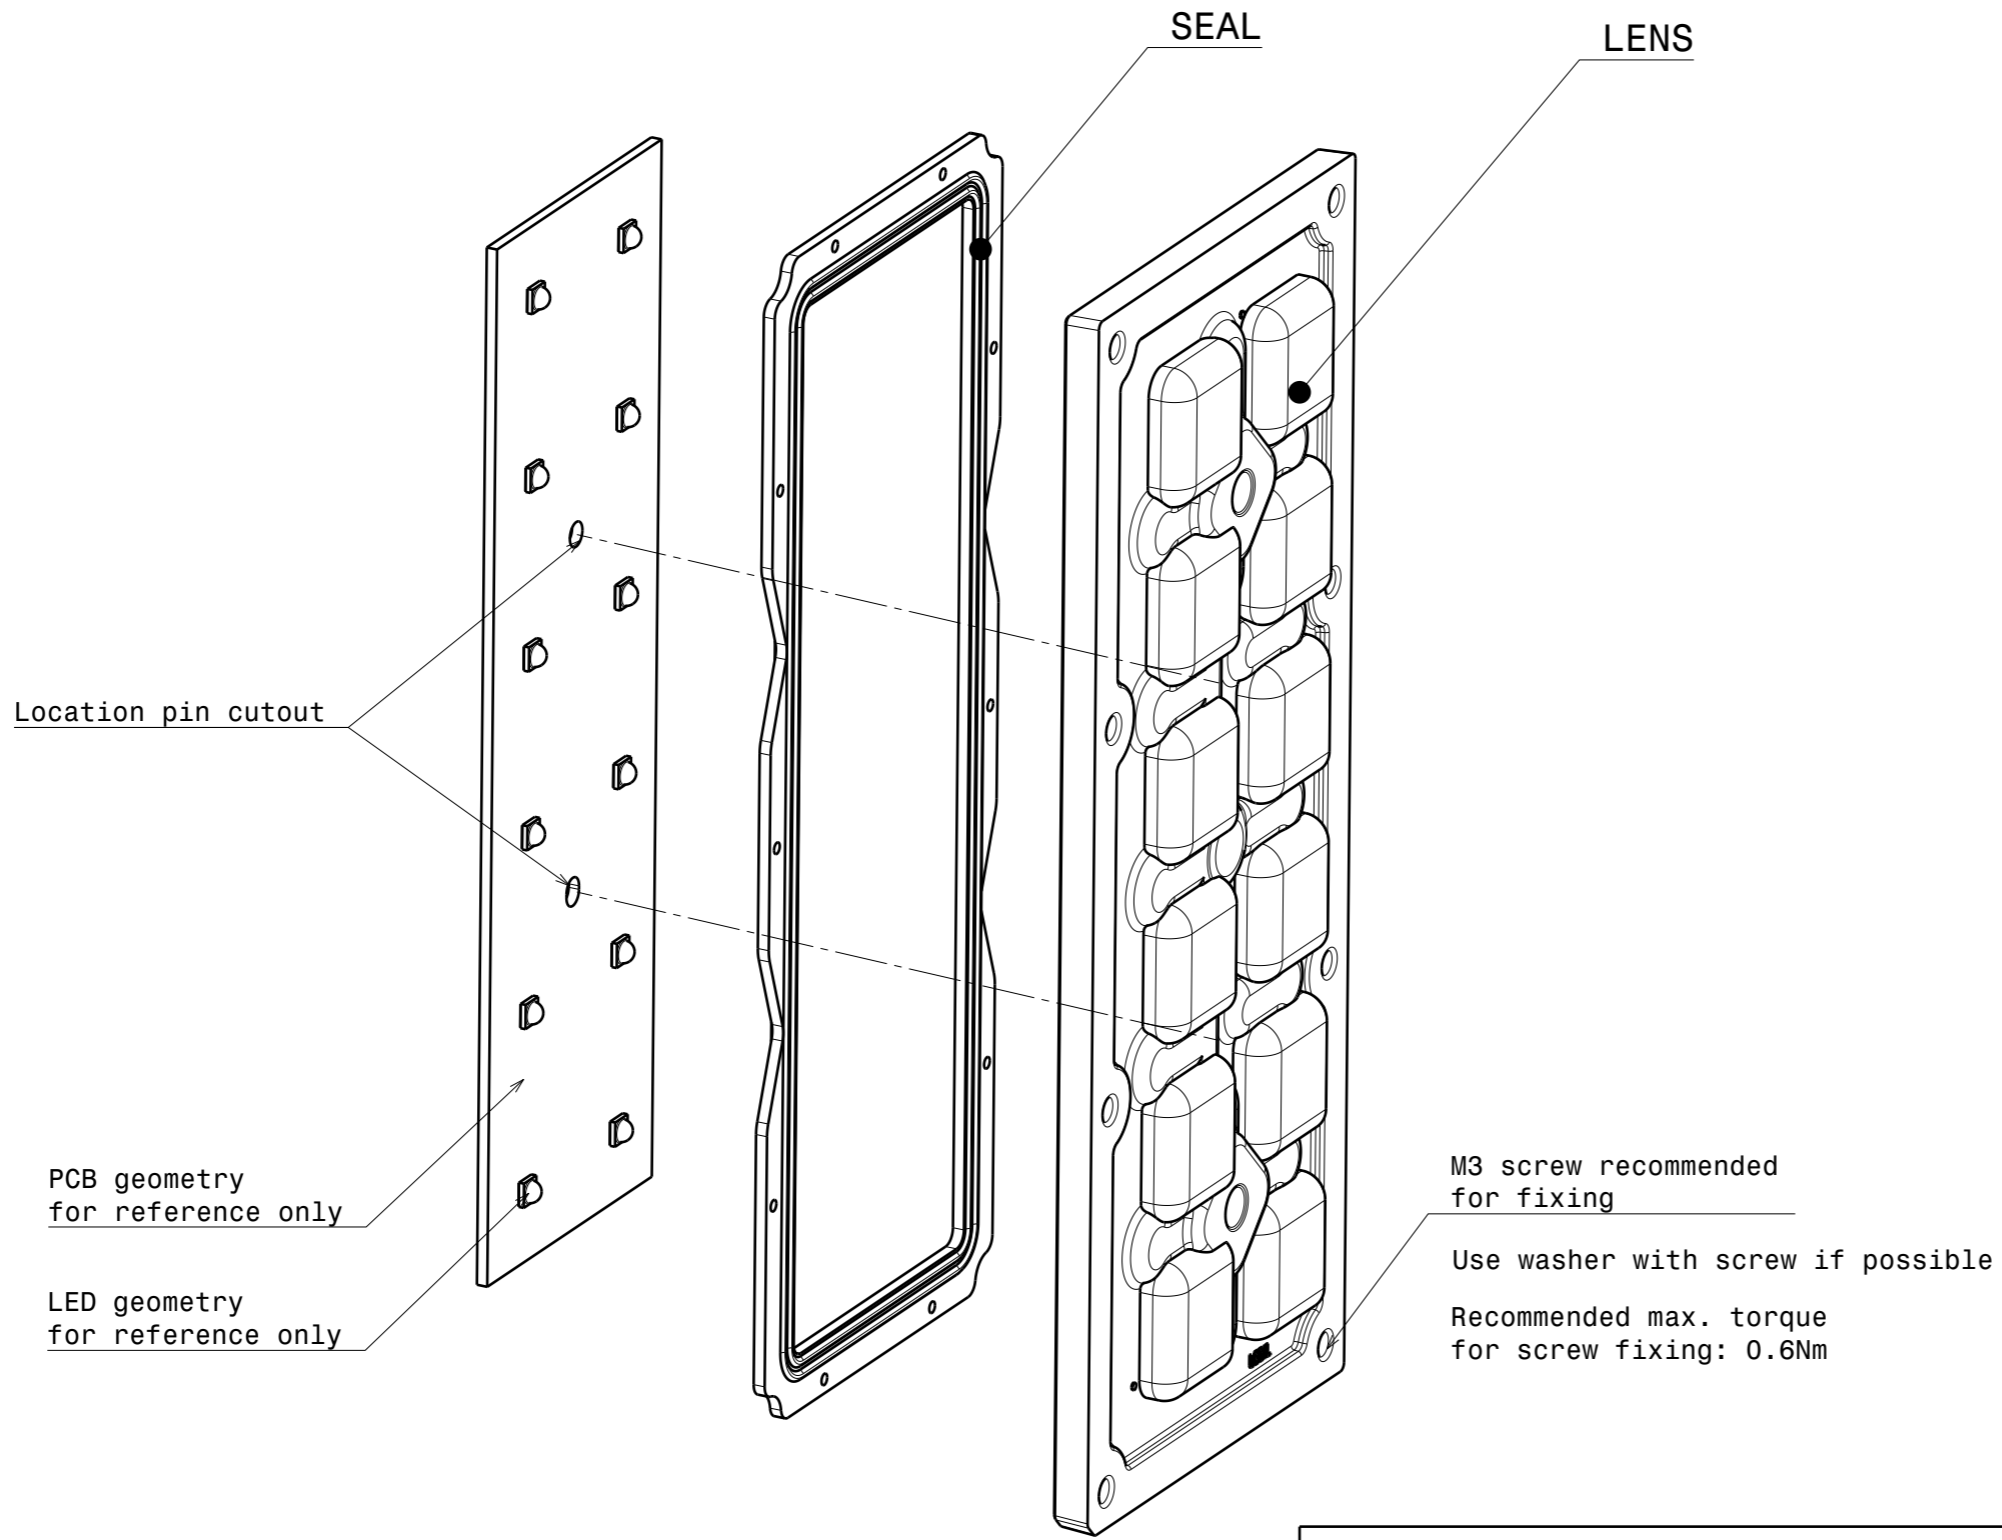

**Notes**

For more details about installation please see LEDiL Installation Guide on [www.ledil.com](http://www.ledil.com)

<b>MECHANICAL DRAWING</b>		<b>LEDiL<sup>®</sup></b>			
PRODUCT CS15223_STRADA-IP-2X6-T2-C-90					
Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.			
SCALE	1:1	SIZE	A3	SHEET	2/2