

STRADA-2X2CSP-VSM

IESNA Type V (square) for wide area lighting such as car parks.

SPECIFICATION:

Dimensions	50.0 x 50.0
Height	5.8 mm
Fastening	pin, screw
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADA-2X2CSP-VSM	Multi-lens	PMMA	clear		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15932_STRADA-2X2CSP-VSM » Box size: 480 x 280 x 300 mm	800	160	160	5.6

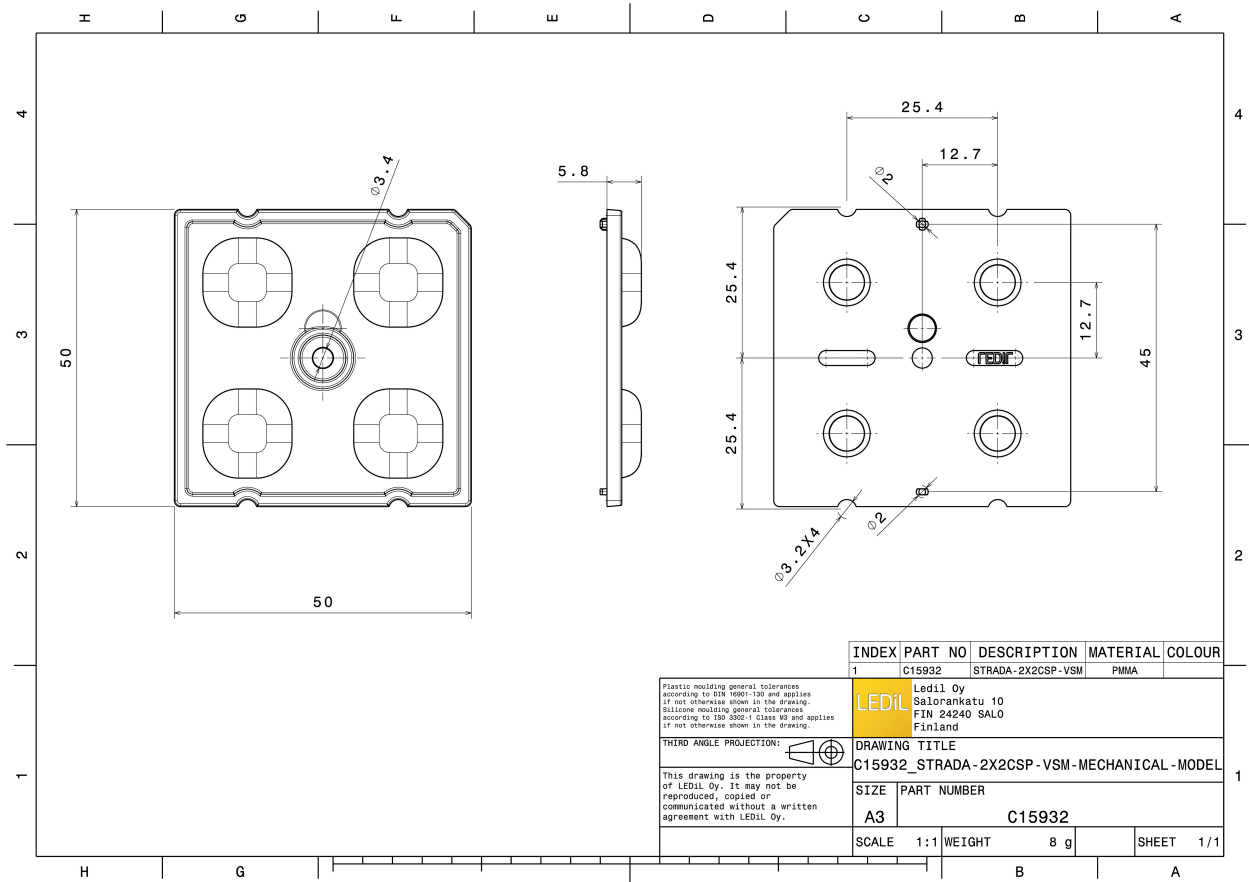

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C15932	STRADA-2X2CSP-VSM	PMMA	


<small>Plastic moulding general tolerances according to DIN 19901-100 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 class M3 and applies if not otherwise shown in the drawing.</small>			Ledil Oy Salorankatu 10 FIN 24240 SALO Finland
<small>THIRD ANGLE PROJECTION:</small>			DRAWING TITLE C15932_STRADA-2X2CSP-VSM-MECHANICAL-MODEL
<small>This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.</small>		SIZE A3	PART NUMBER C15932
SCALE 1:1		WEIGHT 8 g	SHEET 1/1

See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED NVSW219D
 FWHM / FWTM 157.0° / 163.0°
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

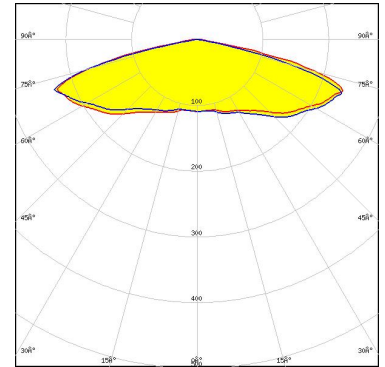

Light distribution files





LED NVSxE21A
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

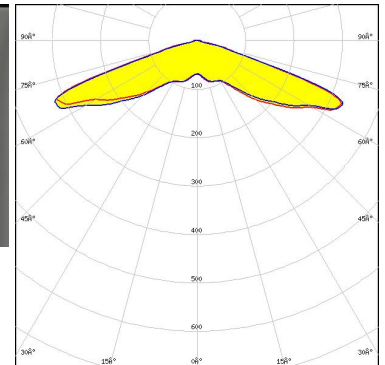

Light distribution files






LED 2x2 Y22 module - SMJQ-D48W16AA-XX
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

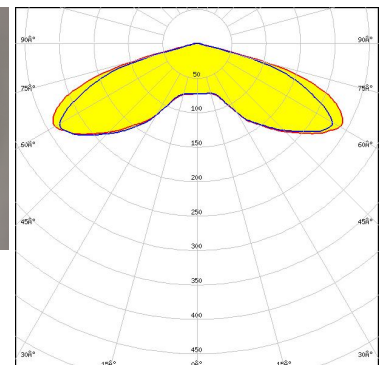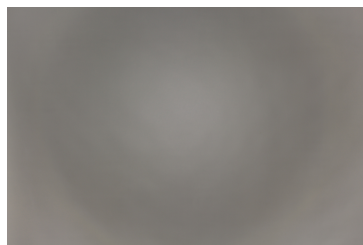
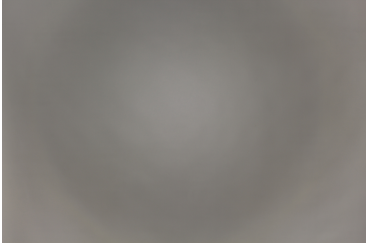
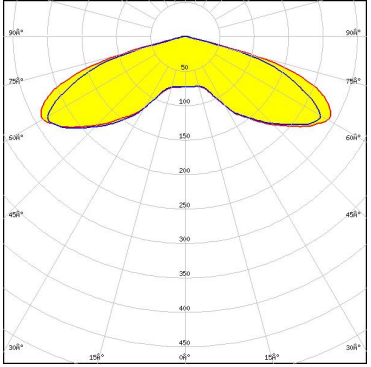


Light distribution files


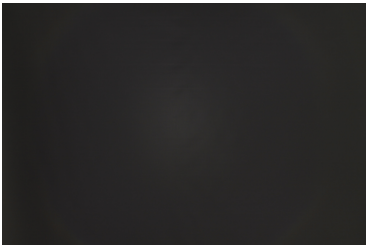
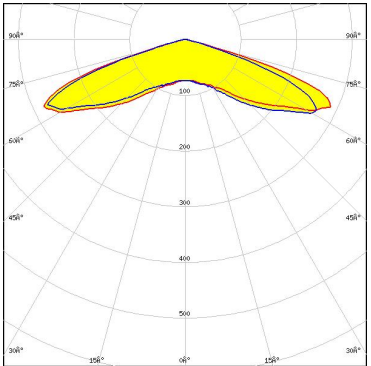
OPTICAL RESULTS (MEASURED):

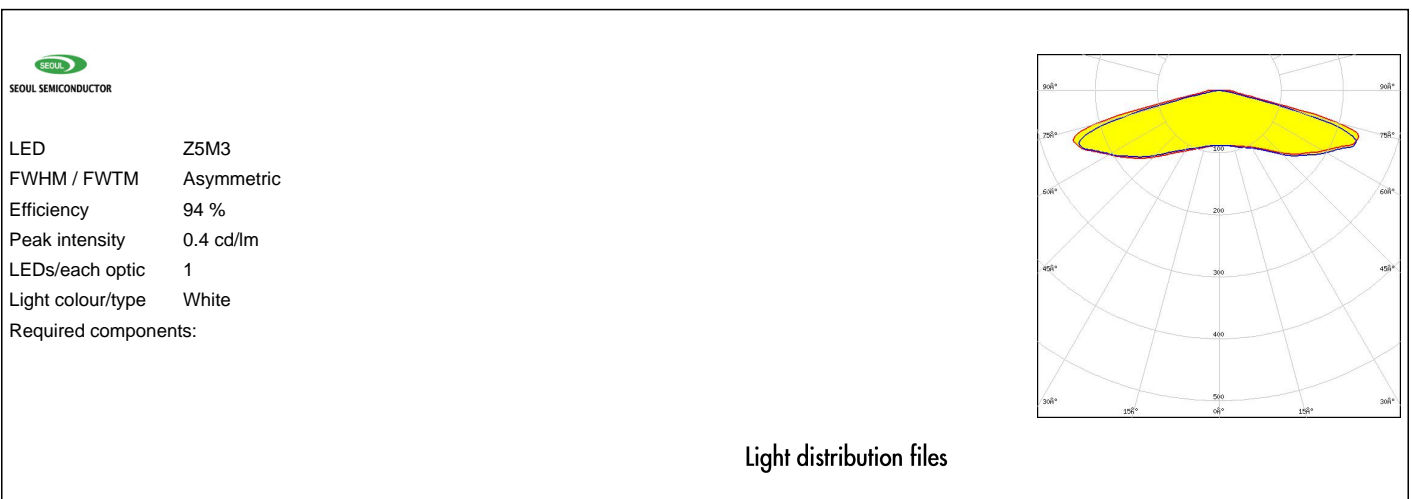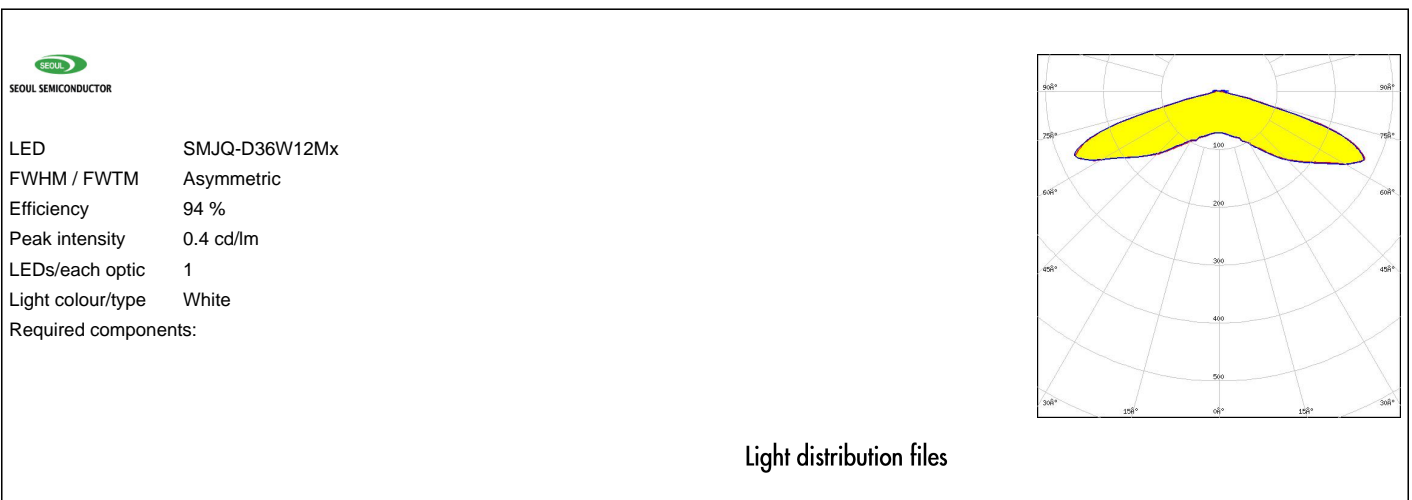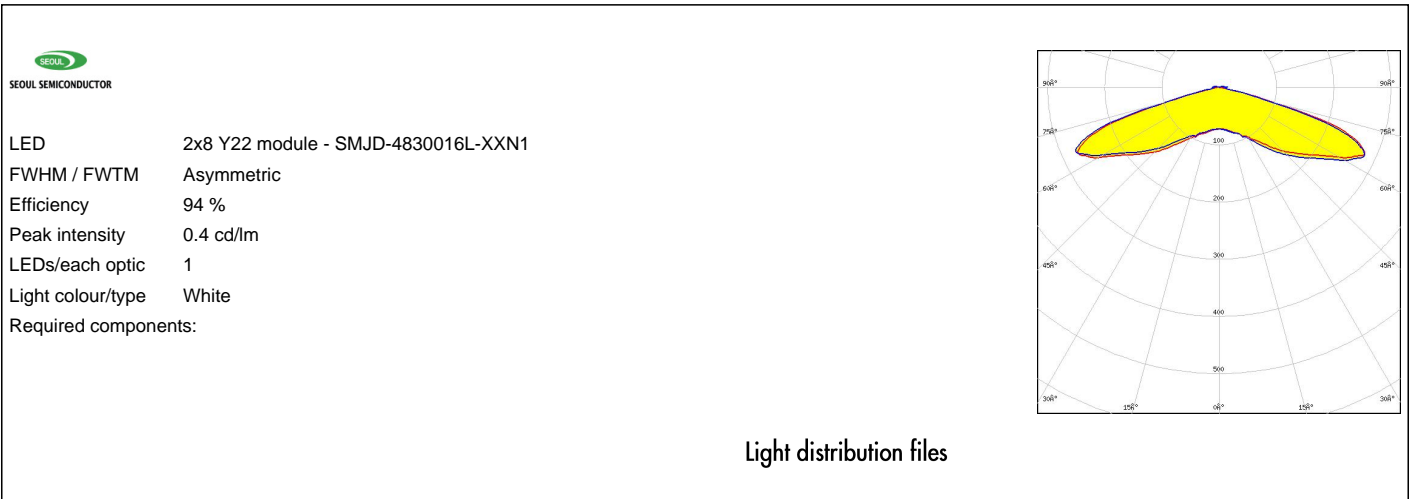

OPTICAL RESULTS (MEASURED):

 <p>SEOL SEMICONDUCTOR</p>			
LED	Z8Y19		
FWHM / FWTM	Asymmetric		
Efficiency	94 %		
Peak intensity	0.3 cd/m		
LEDs/each optic	4		
Light colour/type	White		
Required components:			

Light distribution files


 <p>SEOL SEMICONDUCTOR</p>			
LED	Z8Y22		
FWHM / FWTM	Asymmetric		
Efficiency	94 %		
Peak intensity	0.5 cd/m		
LEDs/each optic	1		
Light colour/type	White		
Required components:			

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G2
 FWHM / FWTM Asymmetric
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

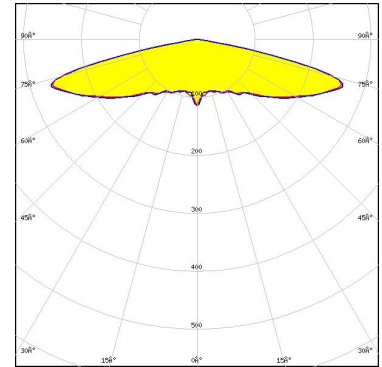

Light distribution files




LED XP-G2 HE
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

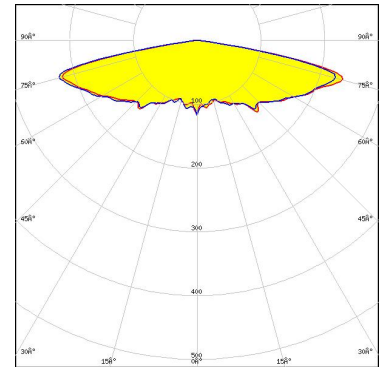

Light distribution files



LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 74 %
 Peak intensity 0.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

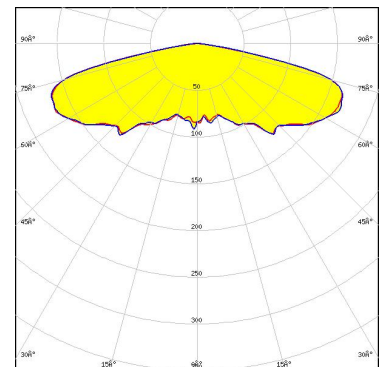


Protective plate, glass

Light distribution files

OPTICAL RESULTS (SIMULATED):



LED LUXEON HL2Z
FWHM / FWTM 148.0° / 156.0 + 154.0°
Efficiency 97 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

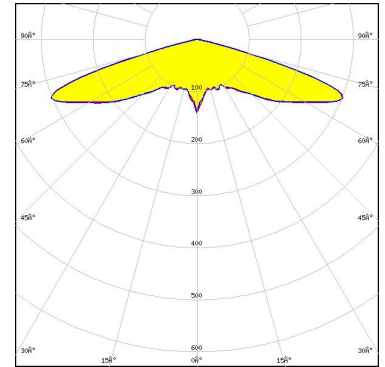


Light distribution files



LED LUXEON HL2Z
FWHM / FWTM 146.0° / 156.0°
Efficiency 80 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


Protective plate, glass

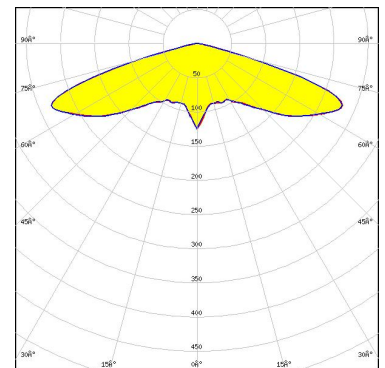

Light distribution files



LED NV4WB35AM
FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

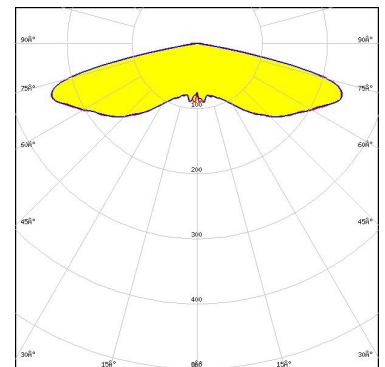


Light distribution files

OPTICAL RESULTS (SIMULATED):

NICHIA

LED: NVSxE21A
 FWHM / FWTM: Asymmetric
 Efficiency: 81 %
 Peak intensity: 0.4 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:

Protective plate, glass

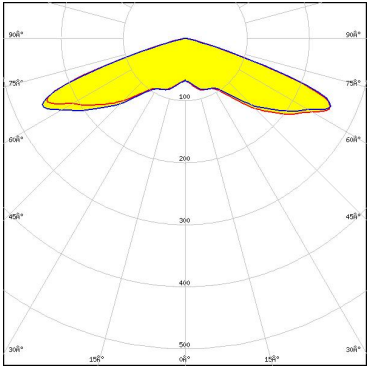


Light distribution files

OSRAM
Opto Semiconductors

LED: OSOLON Square CSSRM2/CSSRM3
 FWHM / FWTM: Asymmetric
 Efficiency: 79 %
 Peak intensity: 0.2 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:


Protective plate, glass

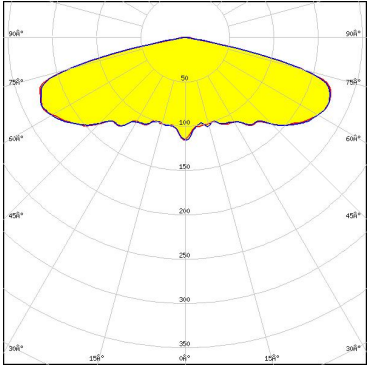

Light distribution files

SAMSUNG

LED: LH181A
 FWHM / FWTM: Asymmetric
 Efficiency: 94 %
 Peak intensity: 0.5 cd/lm
 LEDs/each optic: 1
 Light colour/type: White
 Required components:

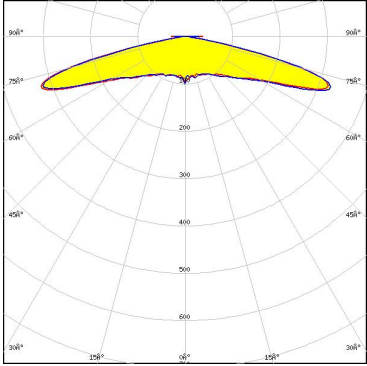


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH181B
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

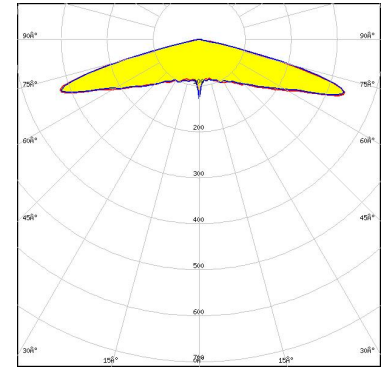

Light distribution files

SAMSUNG


LED LH351C
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

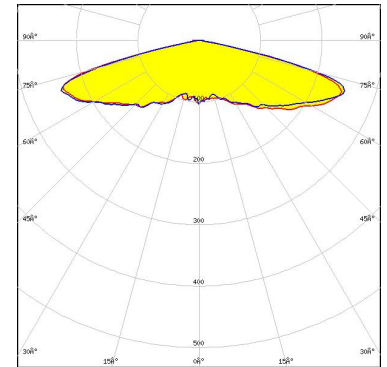

Light distribution files

SAMSUNG




LED LH351C
FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

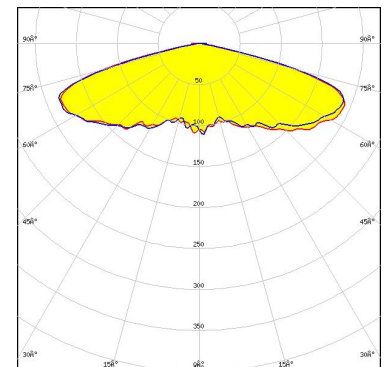




Protective plate, glass

Light distribution files



OPTICAL RESULTS (SIMULATED):

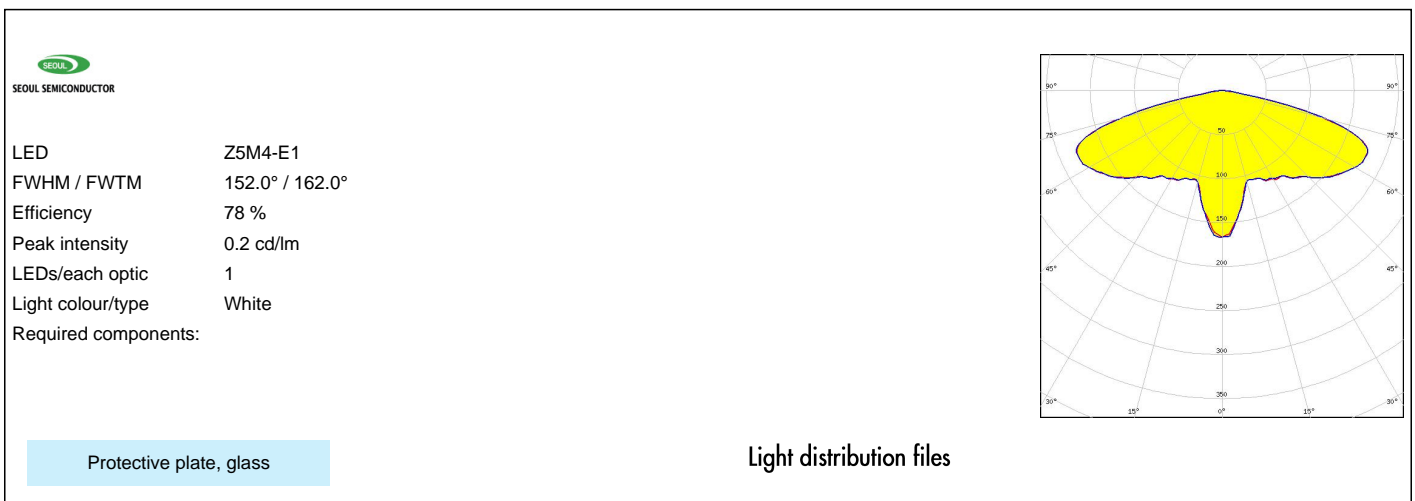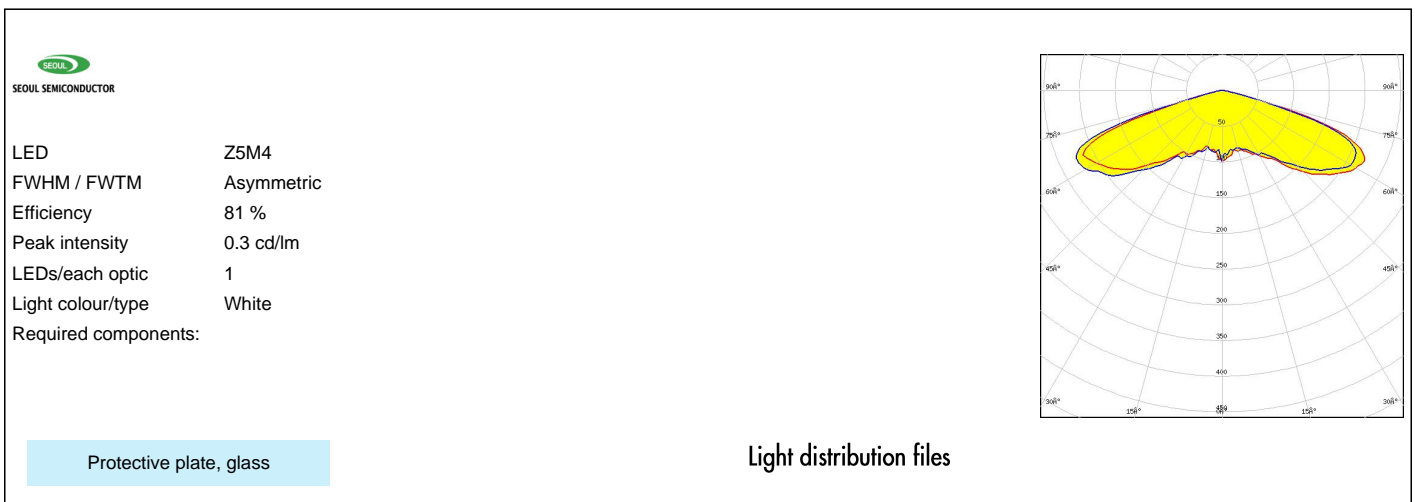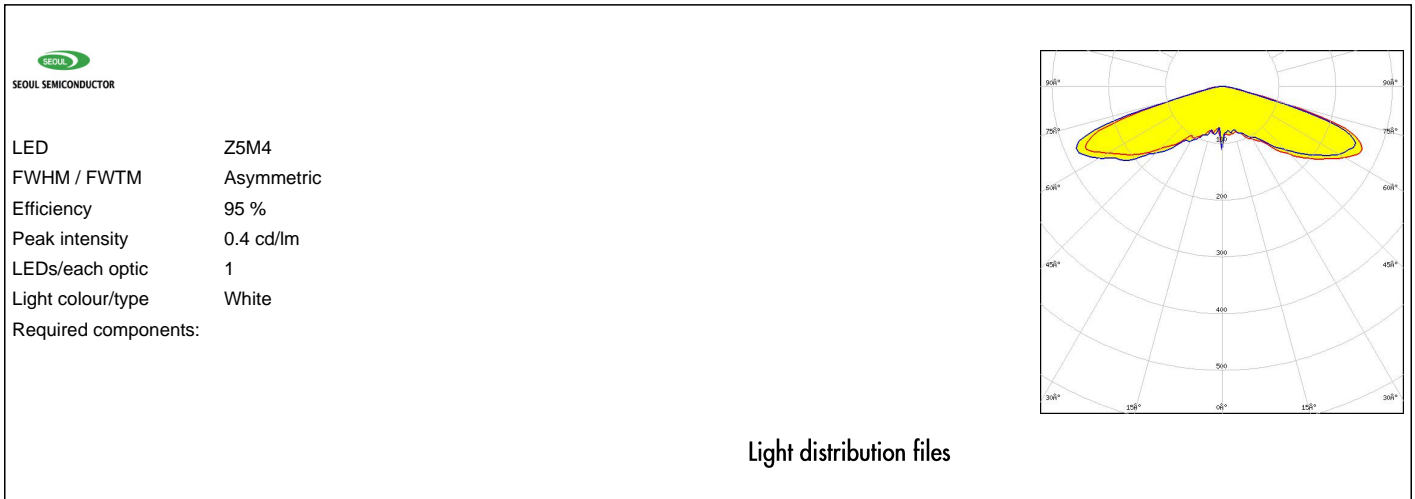

OPTICAL RESULTS (SIMULATED):

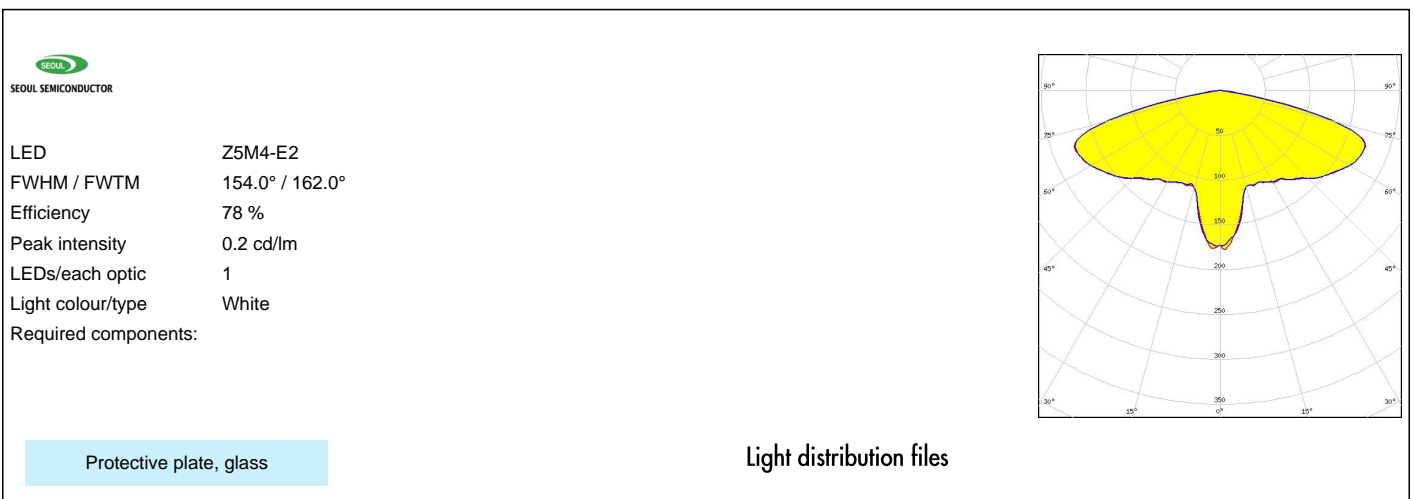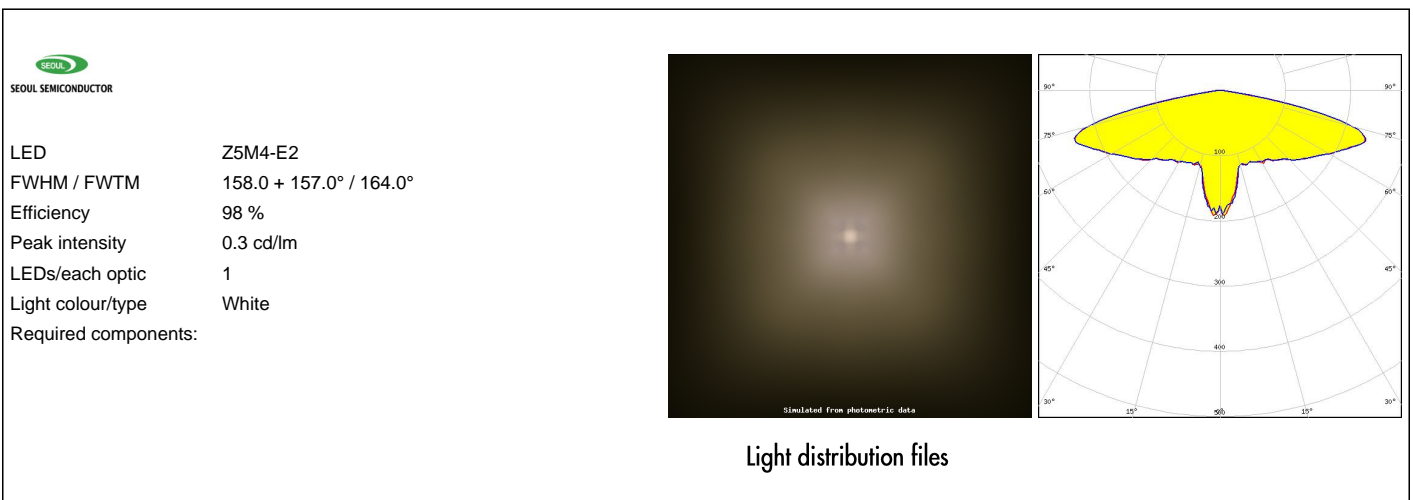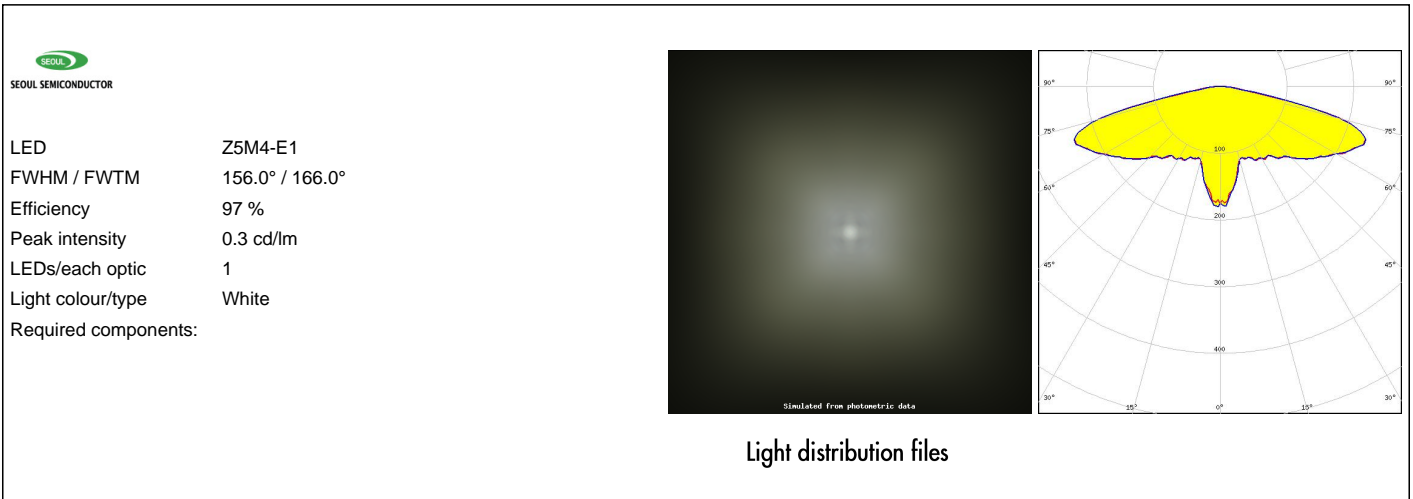

OPTICAL RESULTS (SIMULATED):

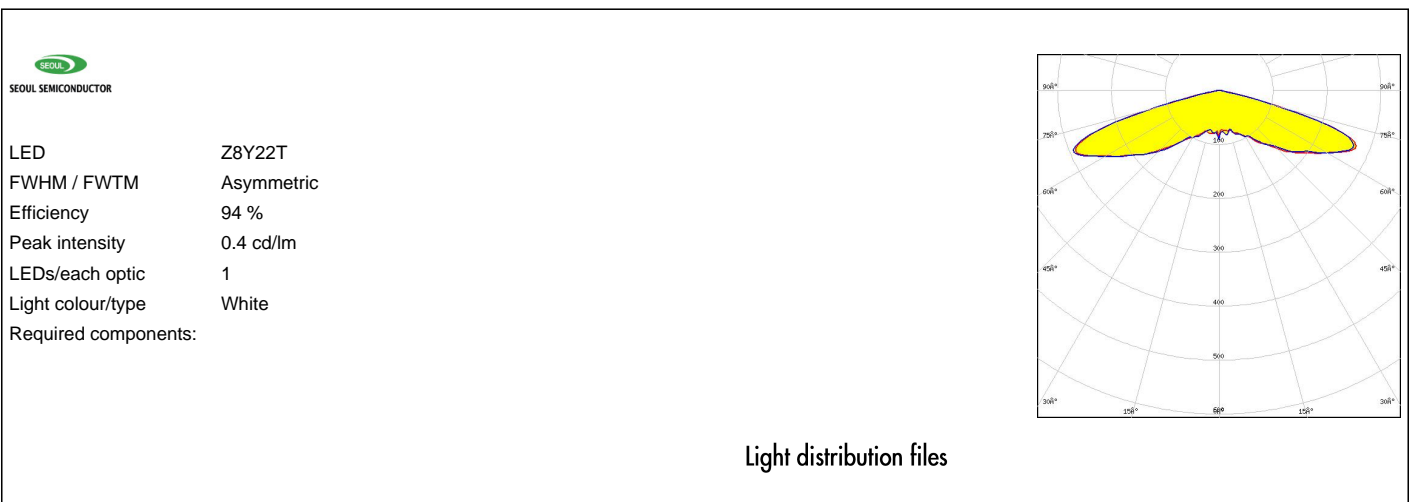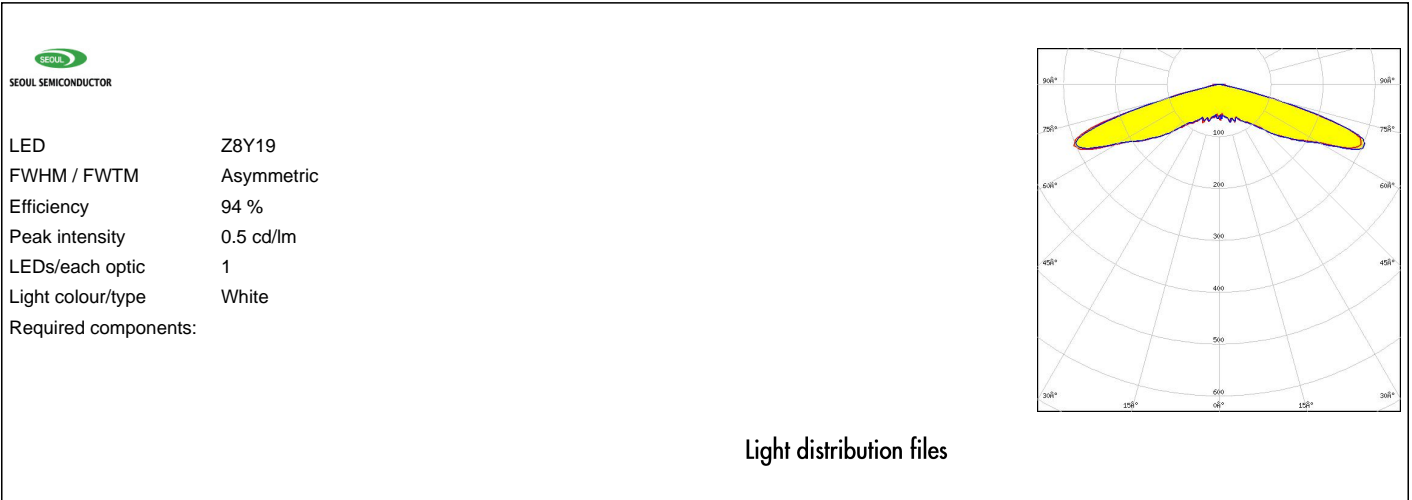

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)