### STRADA-IP-24-VSM-PC

IESNA Type V (square) beam for wide areas lighting such as car parks. Variant made from PC.

#### **SPECIFICATION:**

Dimensions	173.0 x 71.4
Height	9.8 mm
Fastening	pin, screw
Ingress protection classes	IP66,IP67
ROHS compliant	yes 🕕




#### **MATERIALS:**

Component	Type	Material	Colour	Finish	Length (mm)
STRADA-IP-24-VSM-PC	Multi-lens	PC	clear		
STRADA-IP-24-SEAL	Seal	Silicone	white		

#### **ORDERING INFORMATION:**

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CS17761_STRADA-IP-24-VSM-PC	120	120	40	6.8
» Box size: 476 x 273 x 247 mm				



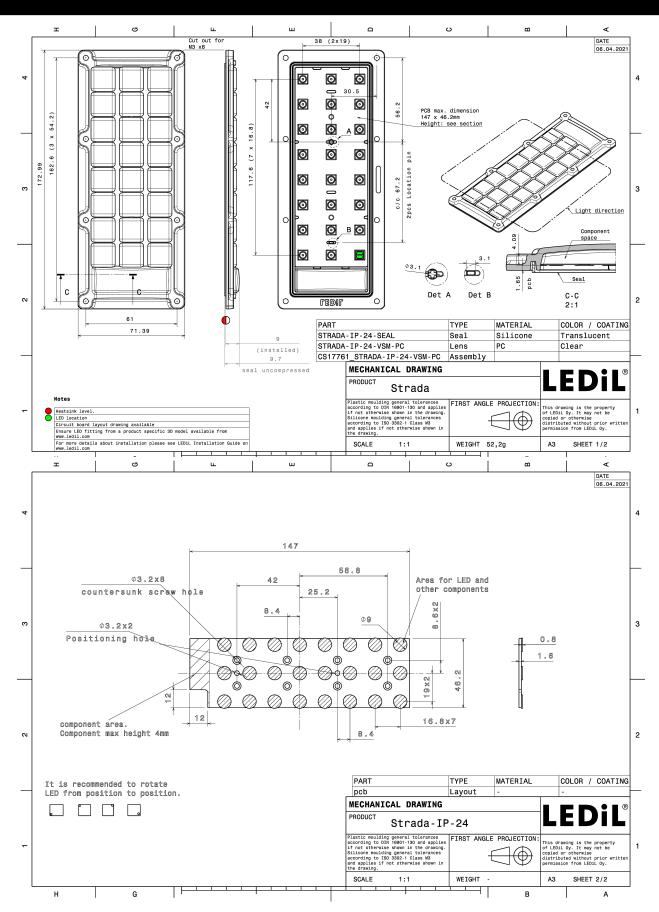

See also our general installation guide: www.ledil.com/installation\_guide


## **OPTICAL RESULTS (MEASURED):**

# AUDAX III

LED LIGHT ENGINE STRADA-IP 24 LEDs 147.4 x 46.2 x 1.5

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files

# inventronics

LED PL-BRICK HP 3x8 IP-24

FWHM / FWTM Asymmetric
Efficiency 88 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:




Light distribution files

# **SAMSUNG**

LED HiLOM RM24 ZP (LH502D)

FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



Light distribution files

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

3/8


## **OPTICAL RESULTS (SIMULATED):**



LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files



LED J Series 5050B 30V K Class

FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files



LED J Series 5050B 6V K Class

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Light distribution files

4/8


## **OPTICAL RESULTS (SIMULATED):**

CREE \$

LED J Series 5050C 6V E Class

FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 0.3 cd/lm LEDs/each optic 1 Light colour/type White

Required components:



Light distribution files




LUXEON 5050 HE LFD FWHM / FWTM Asymmetric

White

Efficiency 81 % Peak intensity 0.3 cd/lm LEDs/each optic

Required components:

Light colour/type




Light distribution files



LUXEON 5050 Round LES

FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour/type White Required components:



Light distribution files

## **OPTICAL RESULTS (SIMULATED):**




LED LUXEON 5050 Square LES

White

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1

Required components:

Light colour/type




Light distribution files



LED RecLED 147x47mm 5800lm 7x0 5050 STRADA-IP-24 G2

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:




Light distribution files

# OSRAM

LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files


6/8

## **OPTICAL RESULTS (SIMULATED):**

# **SAMSUNG**

LFD LH502C  $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 81 % Peak intensity 0.3 cd/lm LEDs/each optic 1 Light colour/type White

Required components:




Light distribution files

# **SAMSUNG**

LH502D LFD FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour/type White

Required components:



Light distribution files



SEOUL DC 5050 6V LED

FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour/type White Required components:

Light distribution files



#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 7 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

#### **Ledil Optics Technology** (Shenzhen) Co., Ltd.

# 405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

#### Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Poznan, Poland Hong Kong, China

#### **Distribution Partners**

8/8

www.ledil.com/ where\_to\_buy