

STRADELLA-16-HB-M-PC

~60° medium beam for industrial applications.
Variant made from PC.

SPECIFICATION:

Dimensions	49.5 x 49.5
Height	7.5 mm
Fastening	pin, screw
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADELLA-16-HB-M-PC	Multi-lens	PC	clear		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16597_STRADELLA-16-HB-M-PC » Box size: 480 x 280 x 300 mm	800	160	160	6.2


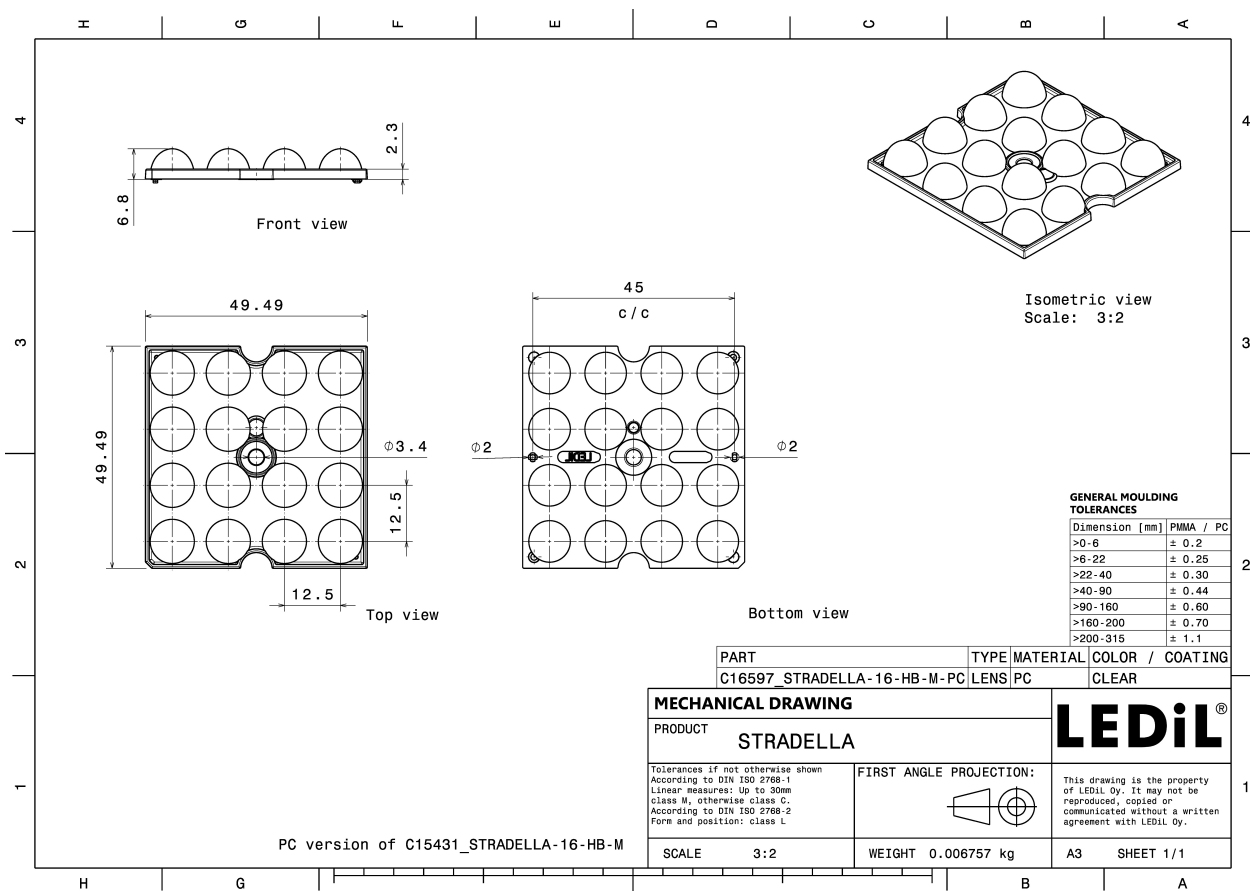


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED EHP-223.5x50-1604-xx-70-LS30-06-NTC
 FWHM / FWTM 60.0° / 116.0°
 Efficiency 92 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

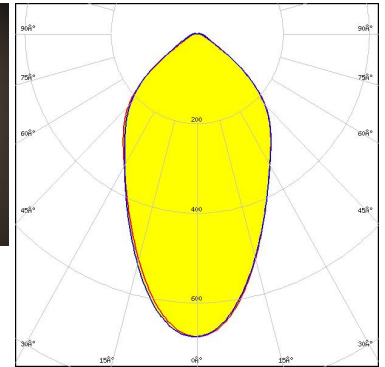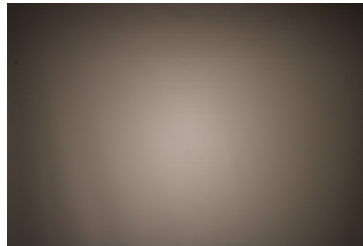

Light distribution files





LED Duris S5 (2 chip)
 FWHM / FWTM 55.0° / 114.0°
 Efficiency 92 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type Purple
 Required components:

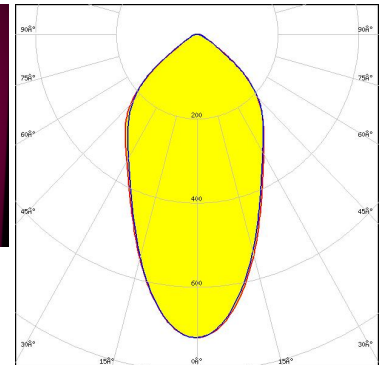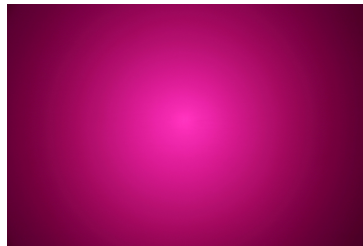

Light distribution files



LED OSCONIQ S 3030 (QSLR31)
 FWHM / FWTM 55.0° / 114.0°
 Efficiency 92 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

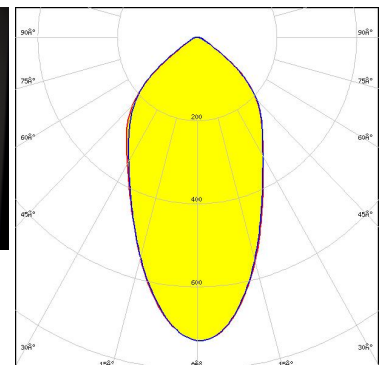
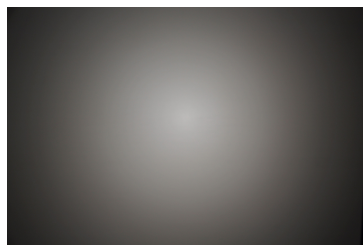


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG



LED HiLOM RM64 (LM301B)
 FWHM / FWTM 55.0° / 115.0°
 Efficiency 93 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

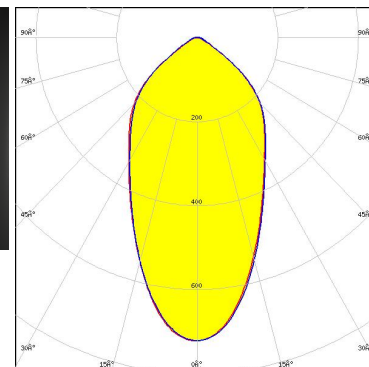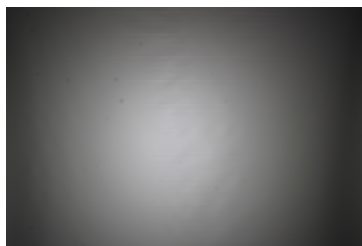

Light distribution files

SCIOLUX

LED XLE-S44XTEHE (XT-E HE)
 FWHM / FWTM 60.0° / 127.0°
 Efficiency 92 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

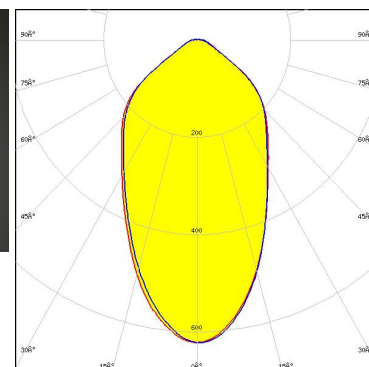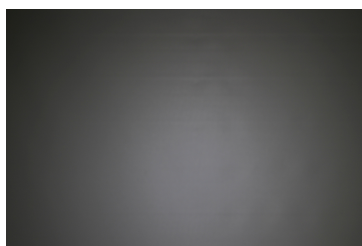

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED CSP 2727 (BXCP)
 FWHM / FWTM 56.0° / 108.0°
 Efficiency 84 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Protective plate, glass

Light distribution files

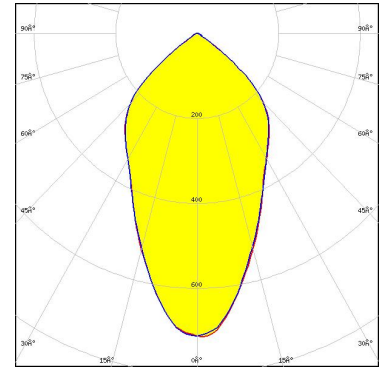


LED CSP 2727 (BXCP)
 FWHM / FWTM 55.0 + 56.0° / 108.0°
 Efficiency 92 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

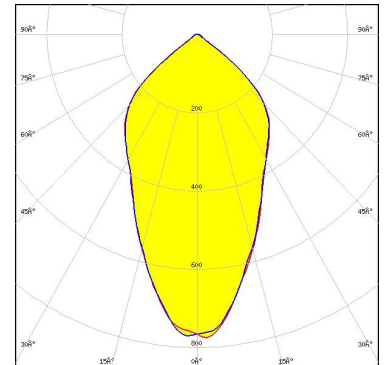

LED J Series 5050C 6V E Class
 FWHM / FWTM 65.0° / 114.0°
 Efficiency 95 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Light distribution files

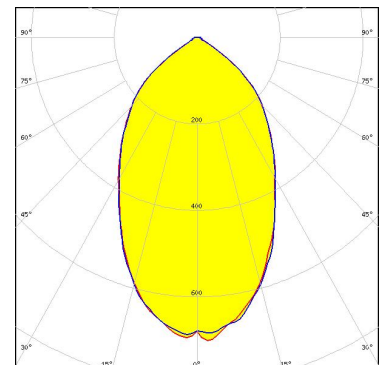

OPTICAL RESULTS (SIMULATED):




LED XP-G2 HE
 FWHM / FWTM 62.0° / 120.0°
 Efficiency 90 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

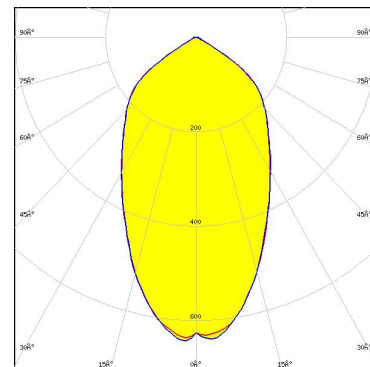

Light distribution files




LED XT-E
 FWHM / FWTM 50.0° / 116.0°
 Efficiency 89 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

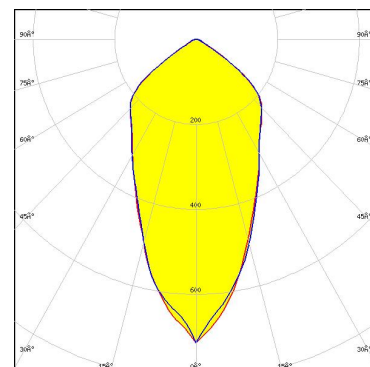

Light distribution files



LED LUXEON 3030 2D (Round LES)
 FWHM / FWTM 55.0° / 112.0°
 Efficiency 92 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

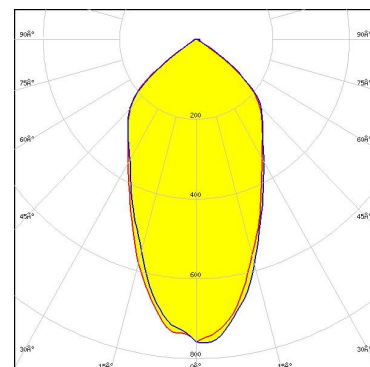

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED LUXEON 3535L HE PLUS
 FWHM / FWTM 56.0° / 114.0°
 Efficiency 86 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Protective plate, glass

Light distribution files

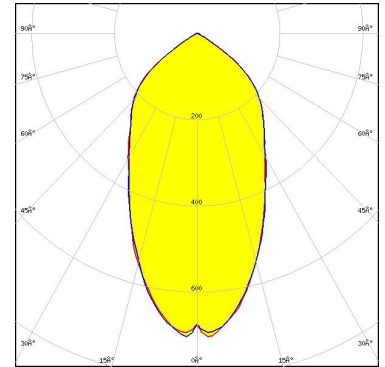


LED NF2x757G
 FWHM / FWTM 54.0° / 113.0°
 Efficiency 93 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

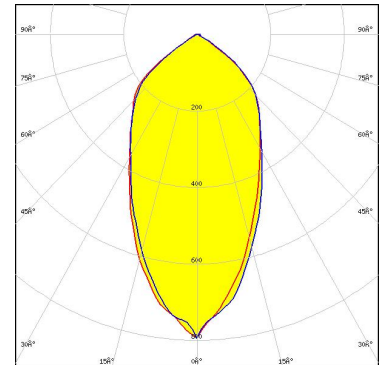

LED NFSWE11A
 FWHM / FWTM 46.0° / 110.0 + 109.0°
 Efficiency 89 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Light distribution files

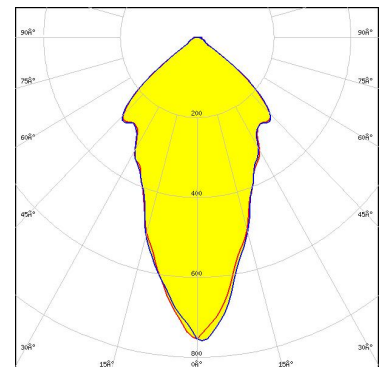

OPTICAL RESULTS (SIMULATED):




LED NVSW519A
 FWHM / FWTM 71.0° / 120.0°
 Efficiency 89 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

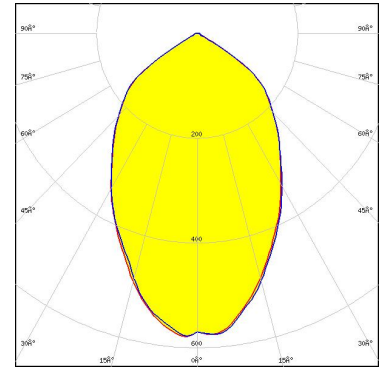

Light distribution files



LED Duris S8
 FWHM / FWTM 61.0° / 115.0°
 Efficiency 84 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

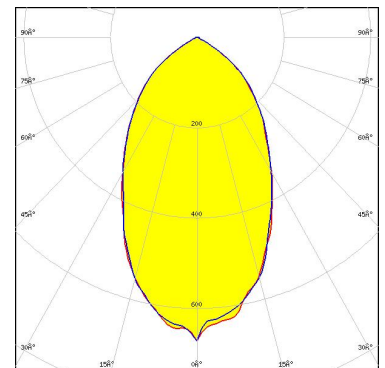


Light distribution files

Protective plate, glass



LED OSCONIQ C 2424
 FWHM / FWTM 53.0° / 112.0°
 Efficiency 92 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

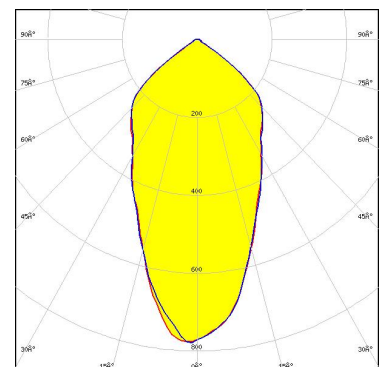


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED: OSCONIQ P 3030
FWHM / FWTM: 42.0° / 111.0°
Efficiency: 95 %
Peak intensity: 1 cd/lm
LEDs/each optic: 1
Light colour/type: White
Required components:

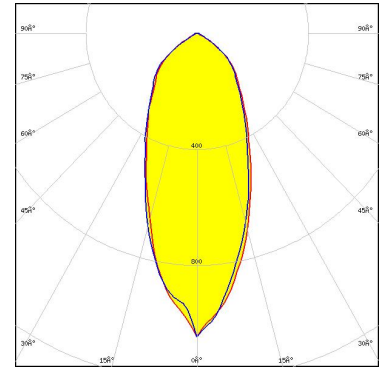

Light distribution files

OSRAM
Opto Semiconductors


LED: OSCONIQ P 3737 (3W version)
FWHM / FWTM: 60.0 + 58.0° / 116.0°
Efficiency: 93 %
Peak intensity: 0.7 cd/lm
LEDs/each optic: 1
Light colour/type: White
Required components:

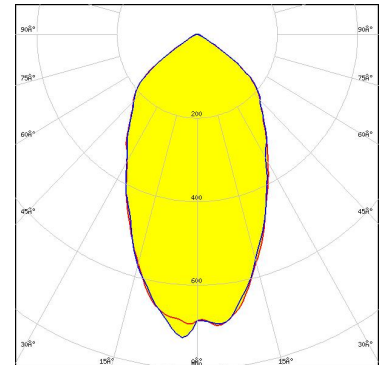

Light distribution files

OSRAM
Opto Semiconductors

LED: OSLOM Square CSSRM2/CSSRM3
FWHM / FWTM: 56.0° / 115.0°
Efficiency: 93 %
Peak intensity: 0.8 cd/lm
LEDs/each optic: 1
Light colour/type: White
Required components:

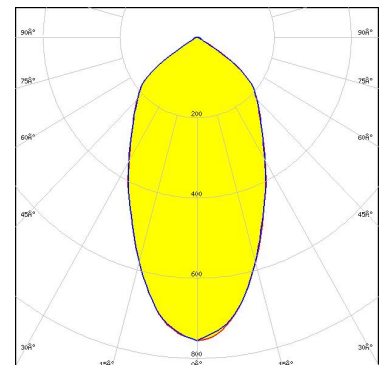

Light distribution files


OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LM301B
 FWHM / FWTM 56.0° / 114.0°
 Efficiency 86 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Protective plate, glass


Light distribution files

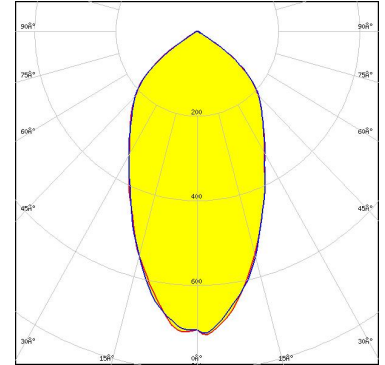

SAMSUNG


LED LM302D
 FWHM / FWTM 58.0° / 114.0°
 Efficiency 93 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

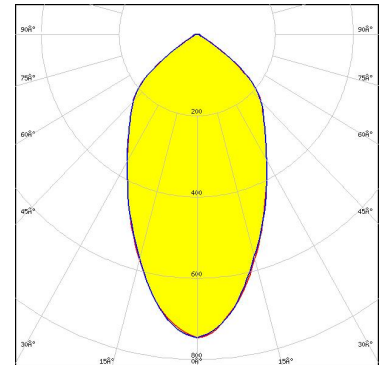

LED SEOUL DC 3030C
 FWHM / FWTM 57.0° / 114.0°
 Efficiency 93 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

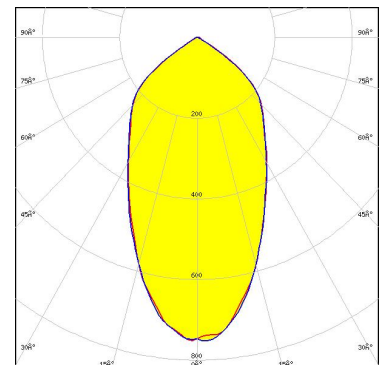

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)