REV	DATE
001	26.10.2026

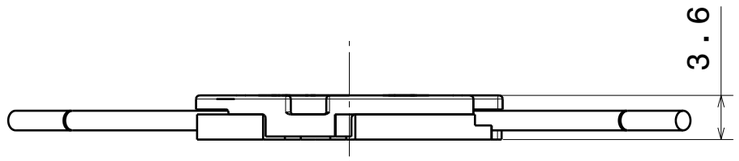

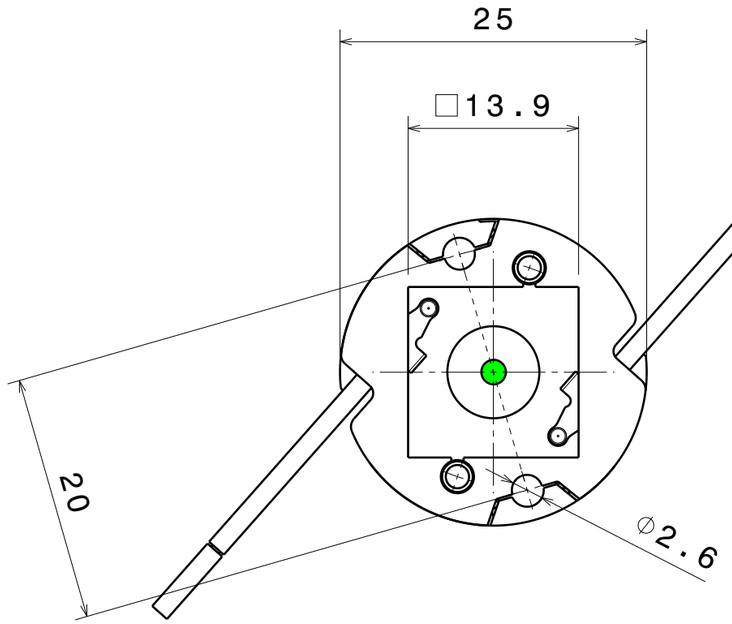

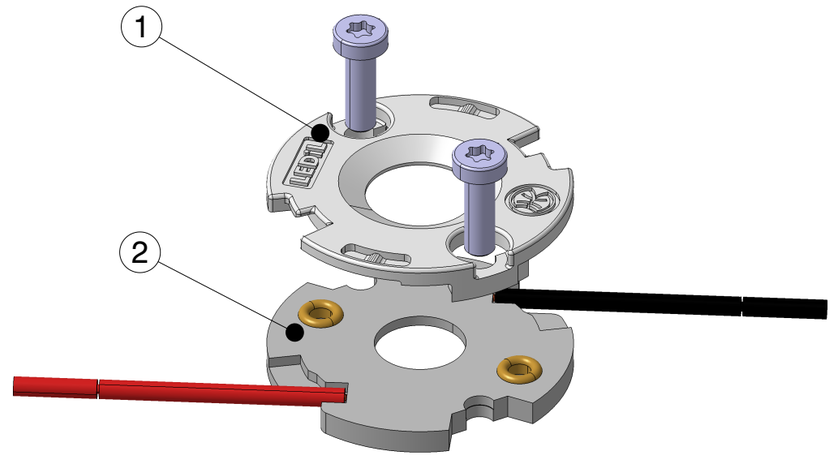

Adapter L20352_TOBA-SOCKET-B-25 and holder L20325_TOBA-B-25-C enclosed separetely

LN20322_TOBA-B-25-C_002_MechanicalModel_001

COMPONENTS

INDEX	PART	COUNT	MATERIAL	COLOR / COATING
1	L20352_TOBA-SOCKET-B-25	1	PBT Pocan	white
2	L20325_TOBA-B-25-C	1	Mica	grey

FASTENING	
Screws	Flat Head Screw M2.5x8 T8 e.g. L20429_TOBA-SCREW-M2.5
Torque	0,1 Nm

Wires	AWG22/7 200mm
Rated current	5A
Rated voltage	80V
Rated temp.	T120

Notes

PCB or heatsink level.
LED location
B+W 634a
Ensure LED fitting from a product specific 3D model available from www.ledil.com
For more details about installation please see LEDiL Installation Guide on www.ledil.com

MECHANICAL DRAWING

PRODUCT TOBA

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1 | WEIGHT - | A3 SHEET 1/1