
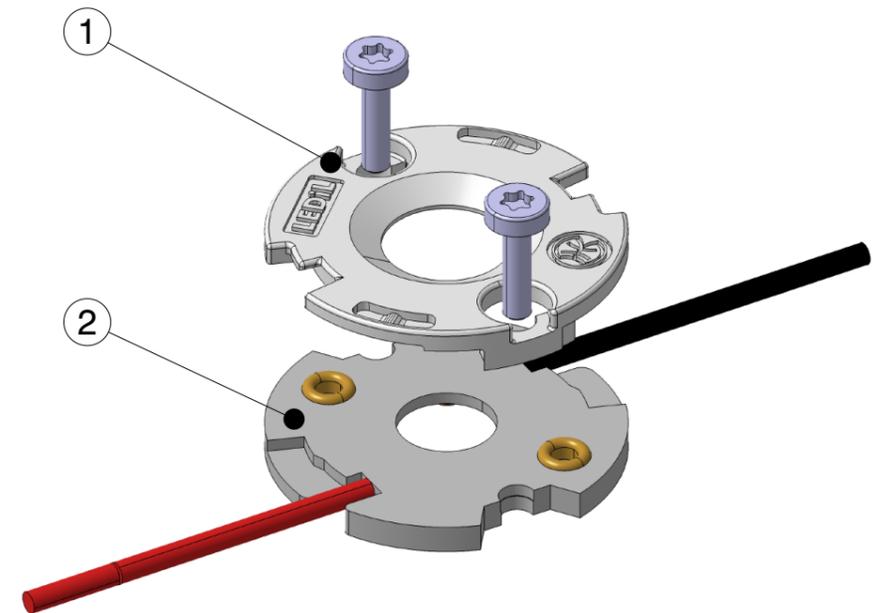
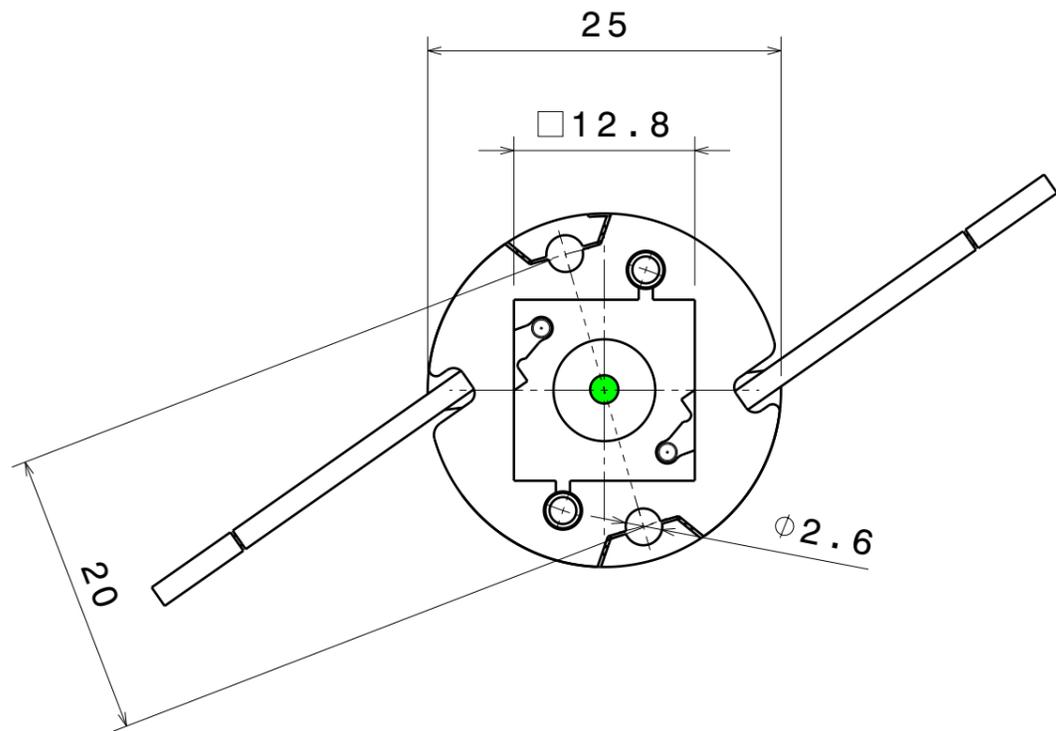


REV	DATE
001	13.08.2025

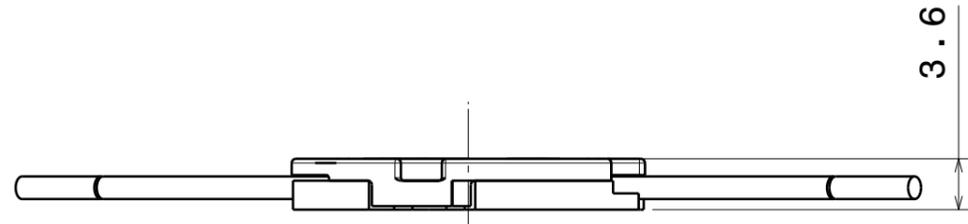

Adapter L20352_TOBA-SOCKET-B-25 and holder L20326_TOBA-B-25-A enclosed separately

Recommended fastening of the holder with L20429_TOBA-SCREW-M2.5 (to be ordered separately)

Fastening torque 0,1Nm

TOBA-B-25-L COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	L20352_TOBA-SOCKET-B-25		1	PBT Pocan	white
2	L20326_TOBA-B-25-A		1	Mica	grey

MECHANICAL DRAWING		LEDiL
PRODUCT TOBA		
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 2:1	WEIGHT -	A3 SHEET 1/1

Notes

	PCB or heatsink level.
	LED location
	Ensure LED fitting from a product specific 3D model available from www.ledil.com
	For more details about installation please see LEDiL Installation Guide on www.ledil.com