
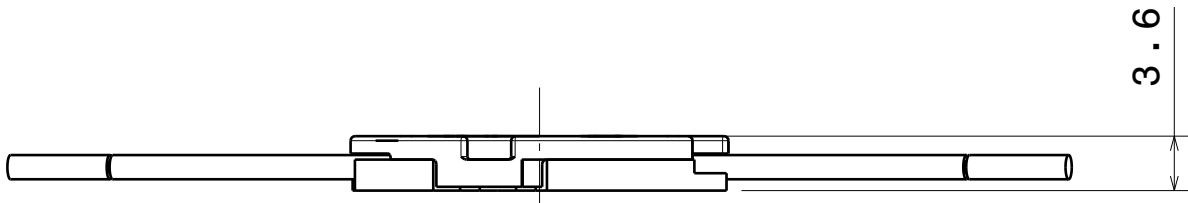
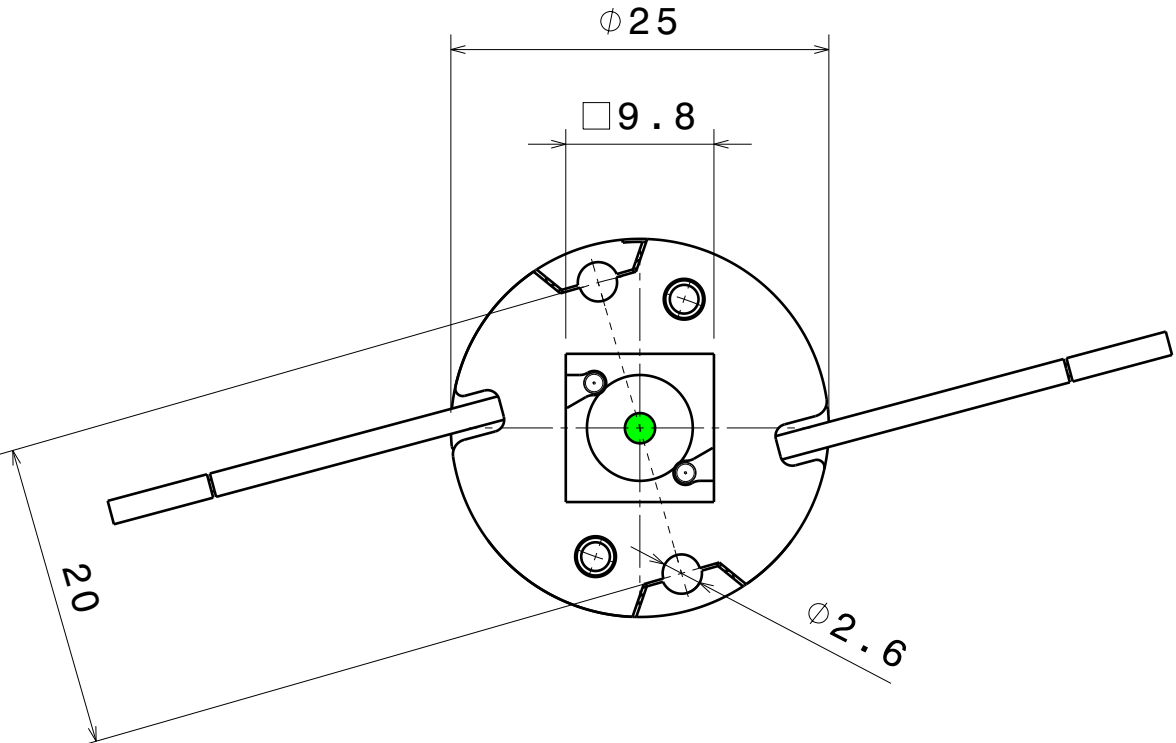


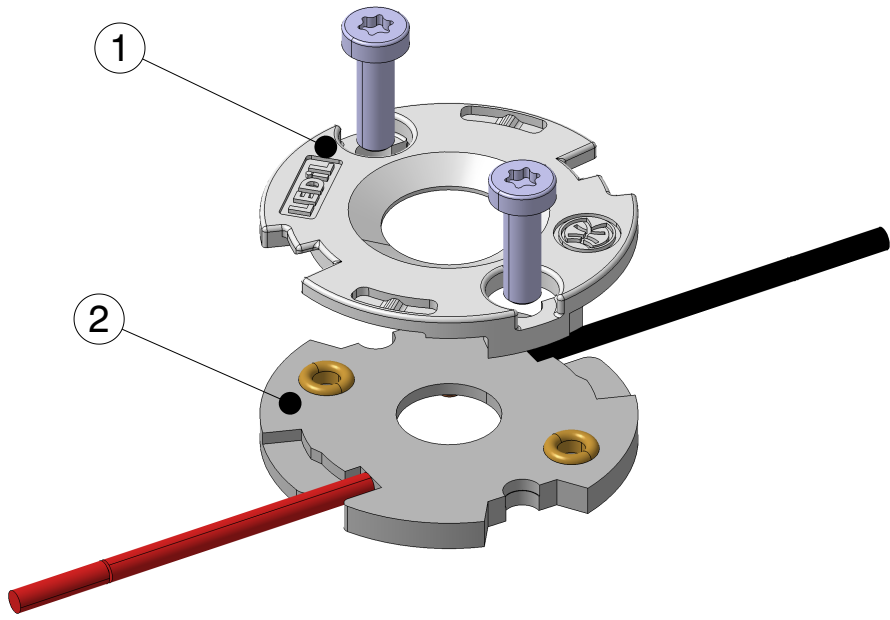

Adapter L20352_TOBA-SOCKET-B-25 and holder L20327_TOBA-B-25-N enclosed separately


LN20324_TOBA-B-25-N_002_MechanicalModel_001

COMPONENTS

INDEX	PART	COUNT	MATERIAL	COLOR / COATING
1	L20352_TOBA-SOCKET-B-25	1	PBT Pocan	white
2	L20327_TOBA-B-25-N	1	Mica	grey

FASTENING	
Screws	Flat Head Screw M2.5x8 T8 e.g. L20429_TOBA-SCREW-M2.5
Torque	0,1 Nm

Wires	AWG22/7 200mm
Rated current	5A
Rated voltage	80V
Rated temp.	T120

MECHANICAL DRAWING		LEDiL
PRODUCT TOBA		
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 2:1	WEIGHT -	A3 SHEET 1/1

Notes	
	PCB or heatsink level.
	LED location
B+W 667a	
Ensure LED fitting from a product specific 3D model available from www.ledil.com	
For more details about installation please see LEDiL Installation Guide on www.ledil.com	