
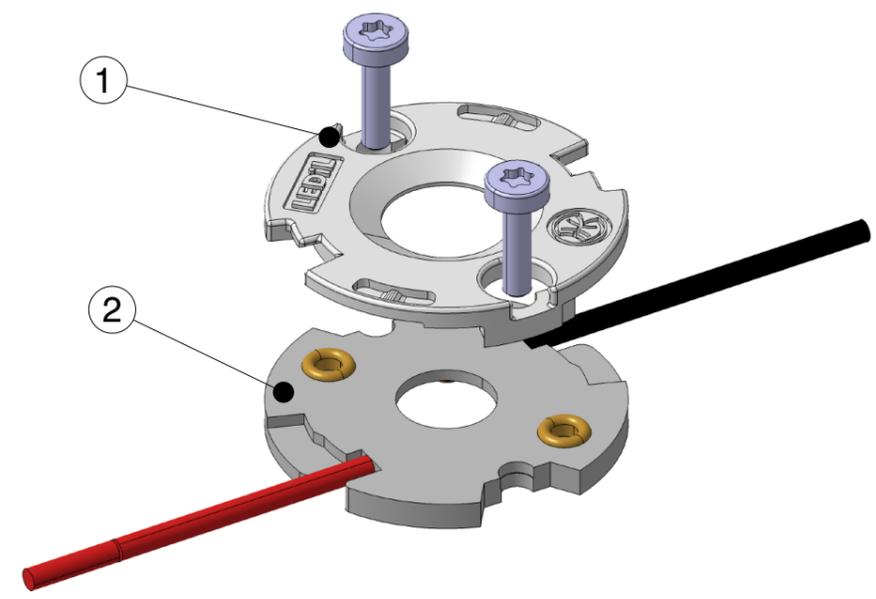
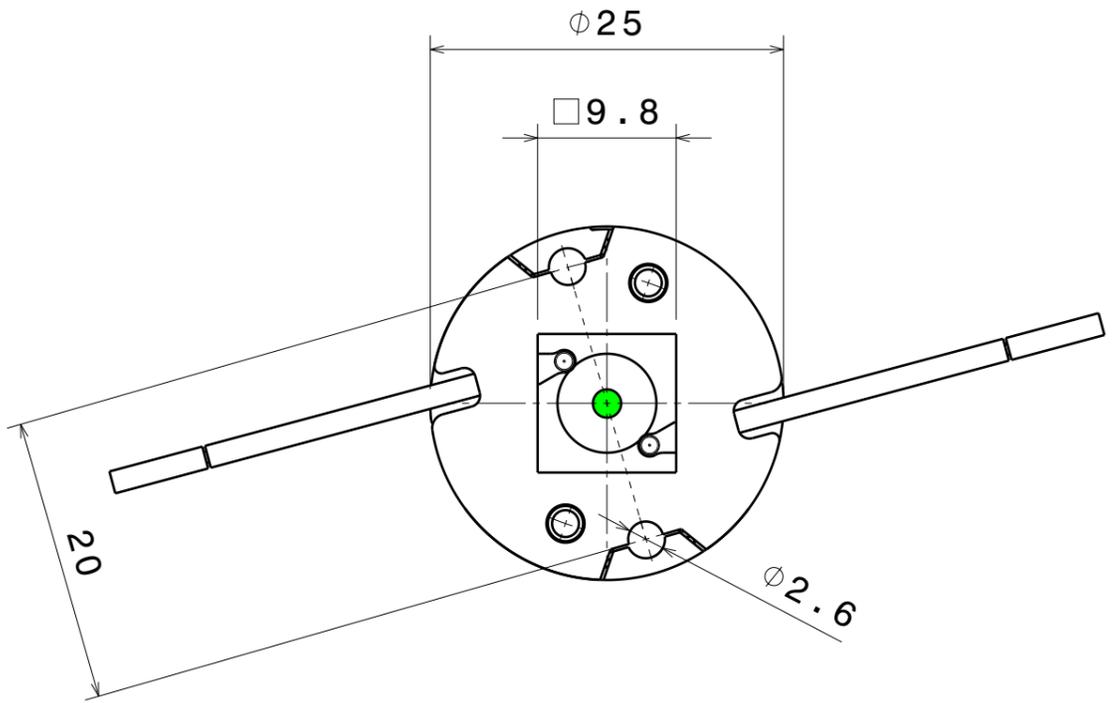


REV	DATE
001	13.08.2025

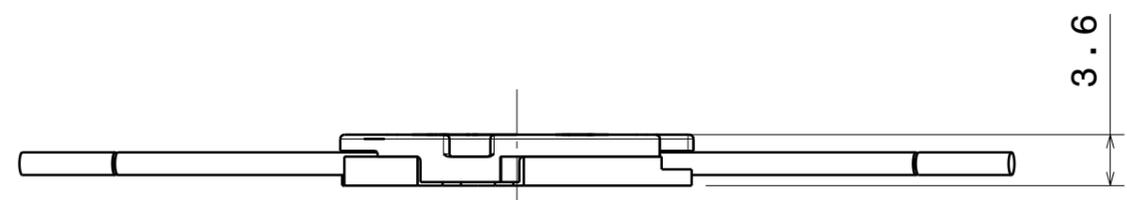

Adapter L20352_TOBA-SOCKET-B-25 and holder L20327_TOBA-B-25-N enclosed separately

Recommended fastening of the holder with L20429_TOBA-SCREW-M2.5 (to be ordered separately)

Fastening torque 0,1Nm

TOBA-B-25-N

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	L20352_TOBA-SOCKET-B-25		1	PBT Pocan	white
2	L20327_TOBA-B-25-N		1	Mica	grey


MECHANICAL DRAWING

PRODUCT TOBA



Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE	2:1	WEIGHT	-	A3	SHEET 1/1
-------	-----	--------	---	----	-----------

Notes

- PCB or heatsink level.
- LED location
- Ensure LED fitting from a product specific 3D model available from www.ledil.com
- For more details about installation please see LEDiL Installation Guide on www.ledil.com