

TINA3-S

~13° spot beam optimized for CREE XP-E.
Assembly with holder, installation tape and
location pins.

SPECIFICATION:

Dimensions	Ø 16.1
Height	11.4 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
TINA3-S	Single lens	PMMA	clear		
TINA3-HLD-PIN-TAPE-XP	Holder	PC	white		
TINA-TAPE3	Tape	Acryl tape	black		

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
FA11905_TINA3-S » Box size:	2016	288	288	3.7


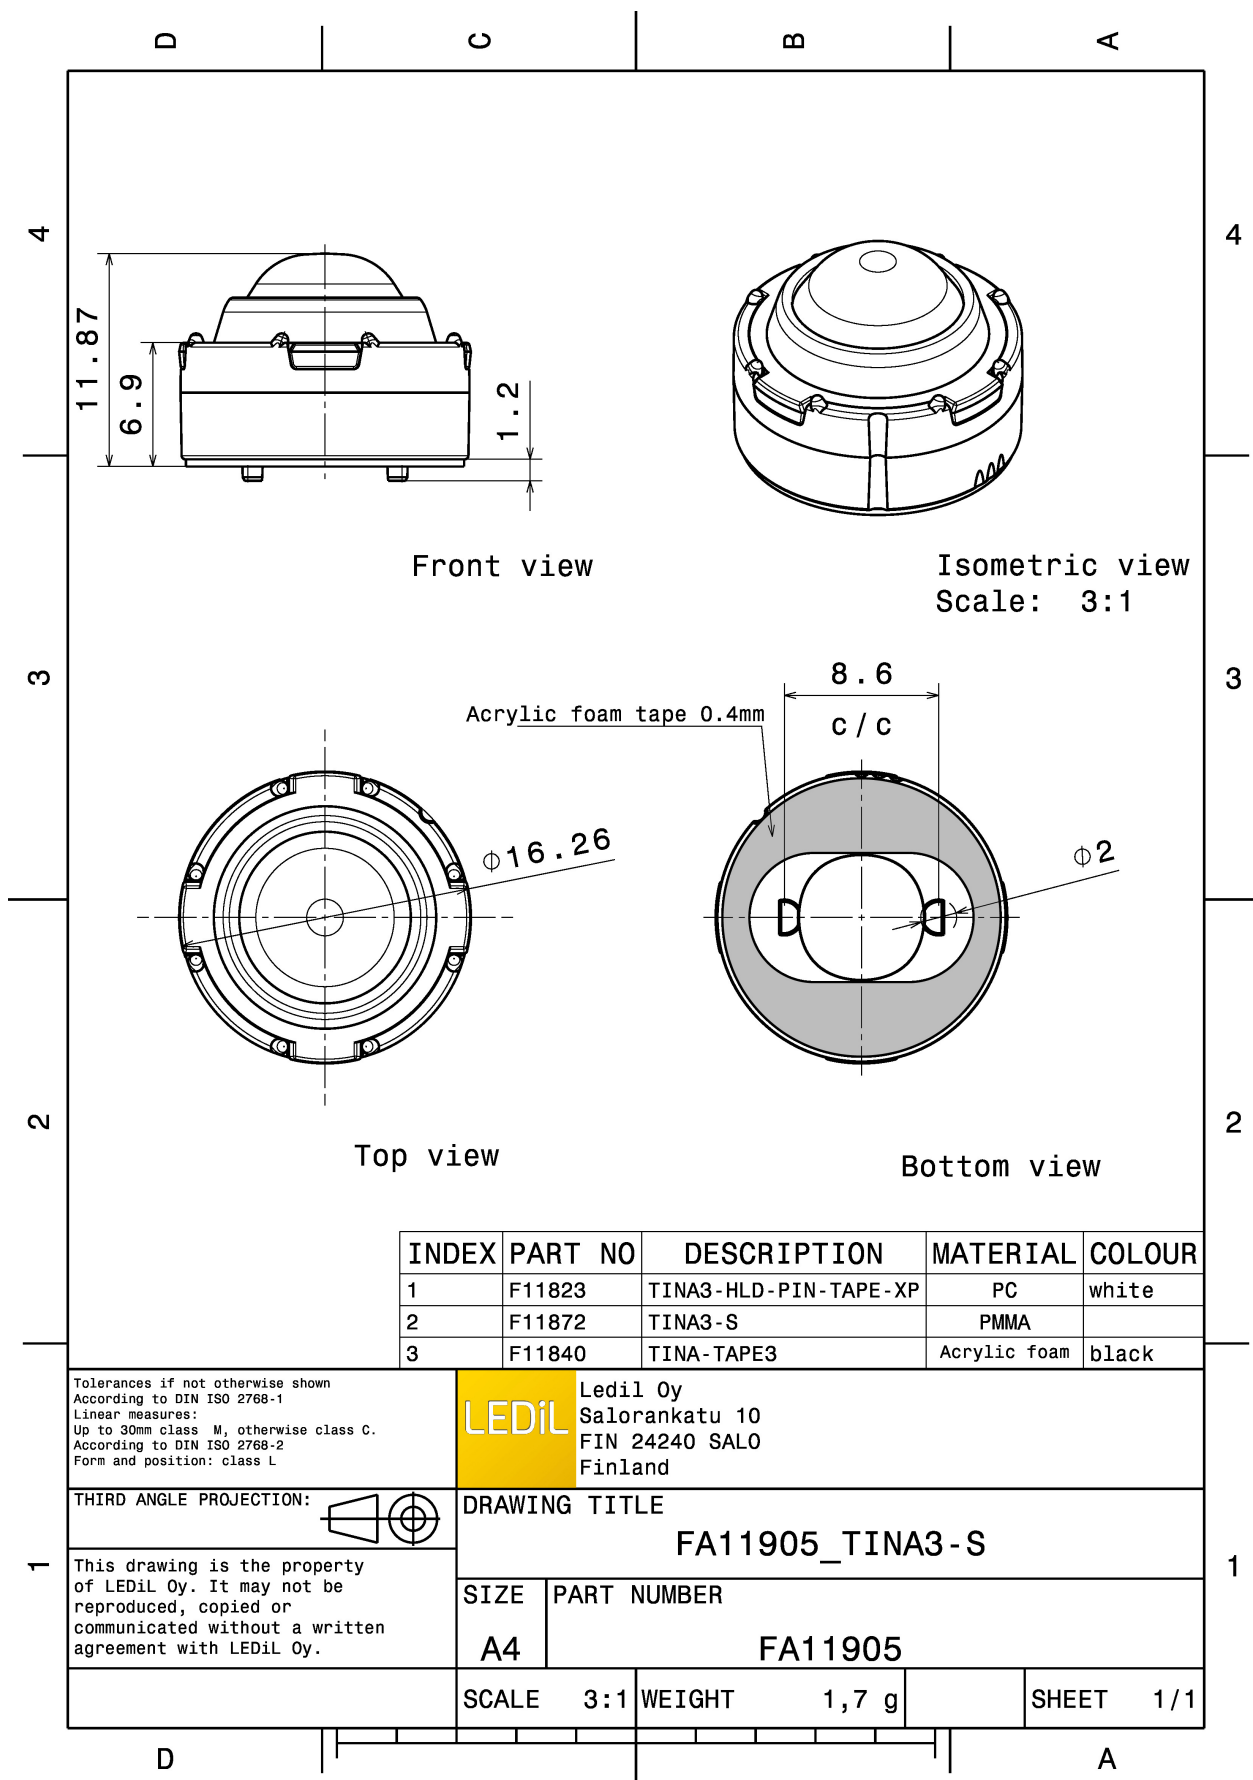


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):



LED XM-L
FWHM / FWTM 23.0° / 30.0°
Efficiency 86 %
Peak intensity 3.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

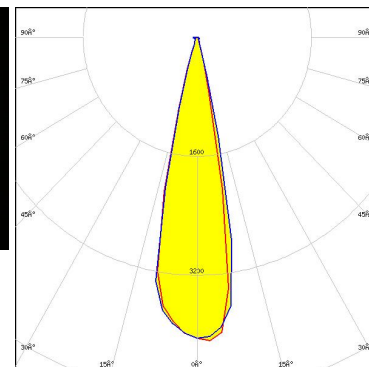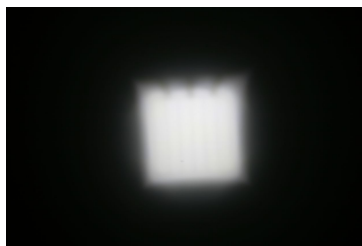


Light distribution files



LED XP-E
FWHM / FWTM 10.0° / 16.0°
Efficiency 86 %
Peak intensity 15.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



LED XP-G
FWHM / FWTM 15.0° / 25.0°
Efficiency 86 %
Peak intensity 6.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


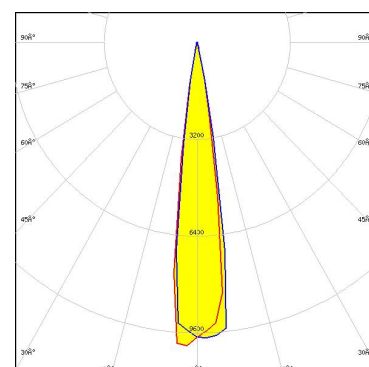


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-L HD
 FWHM / FWTM 23.0° / 32.0°
 Efficiency 87 %
 Peak intensity 3.8 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:

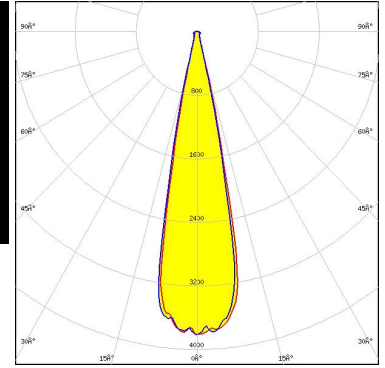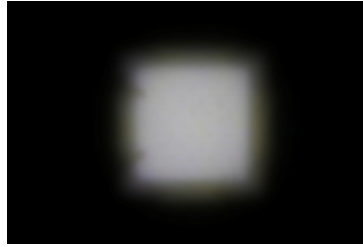

Light distribution files



LED XP-L HI
 FWHM / FWTM 15.0° / 22.0°
 Efficiency 88 %
 Peak intensity 8.9 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:

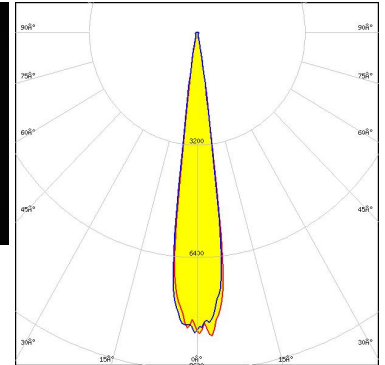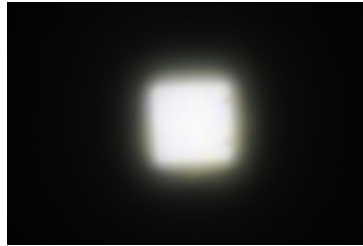

Light distribution files



LED LUXEON A
 FWHM / FWTM 16.0° / 23.0°
 Efficiency 83 %
 Peak intensity 6.7 cd/m
 LEDs/each optic 1
 Light colour/type White
 Required components:



Light distribution files

OPTICAL RESULTS (MEASURED):




LED	LUXEON Rebel
FWHM / FWTM	11.0° / 18.0°
Efficiency	83 %
Peak intensity	12.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



LED	LUXEON Rebel ES
FWHM / FWTM	18.5° / 22.0°
Efficiency	82 %
Peak intensity	6.9 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	



LED	NVSW219F
FWHM / FWTM	18.0° / 24.0°
Efficiency	85 %
Peak intensity	6.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

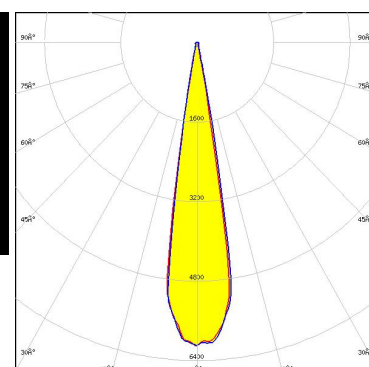

Light distribution files


OPTICAL RESULTS (MEASURED):



LED NVSxx19A
FWHM / FWTM 16.5° / 23.0°
Efficiency 87 %
Peak intensity 6.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



LED OSLOM SSL 150
FWHM / FWTM 9.0° / 14.0°
Efficiency 84 %
Peak intensity 18.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

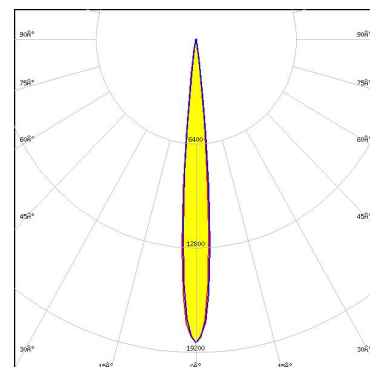

Light distribution files



LED OSLOM SSL 80
FWHM / FWTM 11.0° / 17.0°
Efficiency 86 %
Peak intensity 14 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


OPTICAL RESULTS (MEASURED):

 SEOUL SEMICONDUCTOR		
LED	Z5	
FWHM / FWTM	10.0° / 17.0°	
Efficiency	80 %	
Peak intensity	16.4 cd/lm	
LEDs/each optic	1	
Light colour/type	White	Light distribution files
Required components:		

OPTICAL RESULTS (SIMULATED):




LED XP-E2
FWHM / FWTM 10.0° / 17.0°
Efficiency 92 %
Peak intensity 19.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

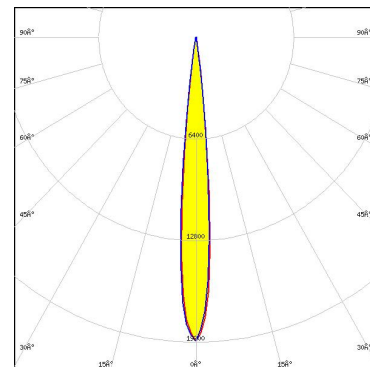

Light distribution files




LED XP-G3
FWHM / FWTM 18.0° / 28.0°
Efficiency 78 %
Peak intensity 5.1 cd/lm
LEDs/each optic 1
Light colour/type Blue
Required components:

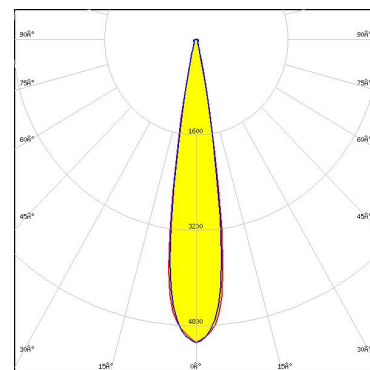

Light distribution files



LED XP-G4
FWHM / FWTM 18.0° / 26.0°
Efficiency 91 %
Peak intensity 8.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


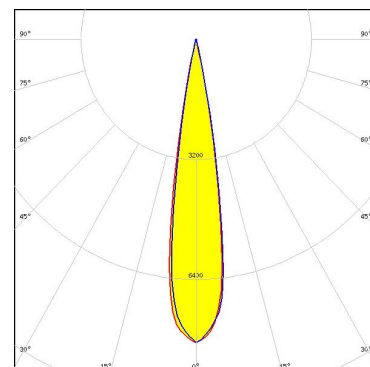


Light distribution files

OPTICAL RESULTS (SIMULATED):





LED XP-GR
 FWHM / FWTM 9.0° / 14.0°
 Efficiency 88 %
 Peak intensity 25.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

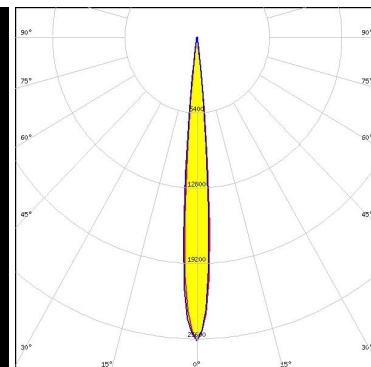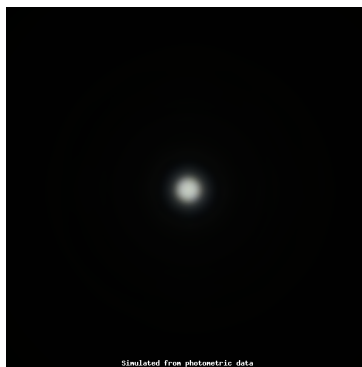

Light distribution files




LED XP-LR
 FWHM / FWTM 12.0° / 18.0°
 Efficiency 88 %
 Peak intensity 16.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

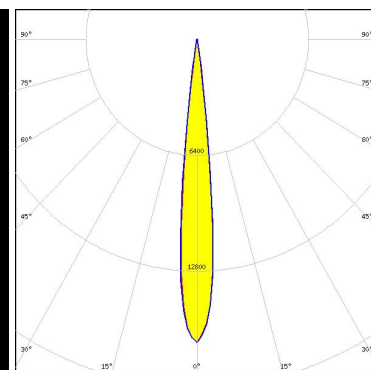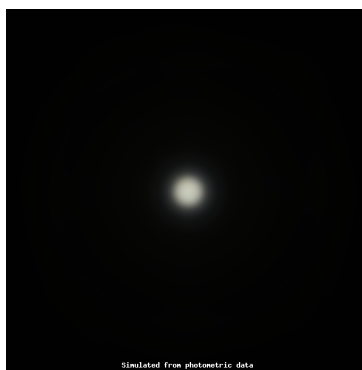

Light distribution files



LED LUXEON 2835 Architectural
 FWHM / FWTM 13.0° / 25.0°
 Efficiency 91 %
 Peak intensity 9.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

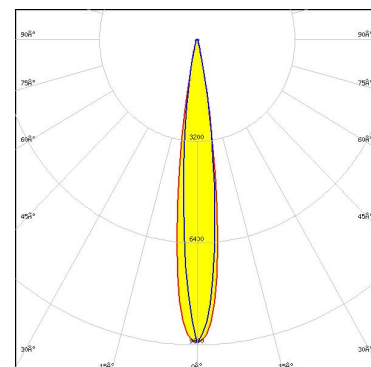


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED	SST-20 Gen1
FWHM / FWTM	12.0° / 22.0°
Efficiency	86 %
Peak intensity	10.8 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

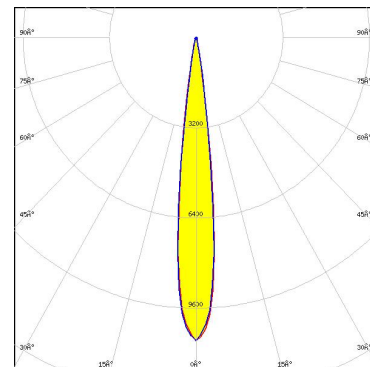

Light distribution files




LED	NV4WB35AM
FWHM / FWTM	22.0° / 41.0°
Efficiency	90 %
Peak intensity	4.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

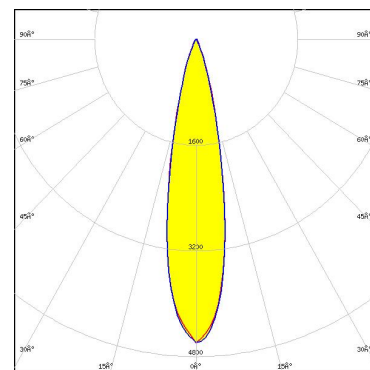

Light distribution files



LED	NVSW519A
FWHM / FWTM	24.0° / 32.0°
Efficiency	82 %
Peak intensity	4.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

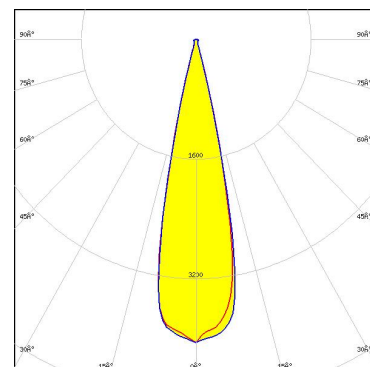


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NVSxx19B/NVSxx19C
 FWHM / FWTM 18.0° / 26.0°
 Efficiency 83 %
 Peak intensity 6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

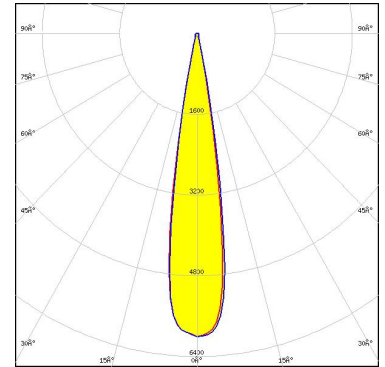

Light distribution files




LED OSLOM Black
 FWHM / FWTM 12.0° / 23.0°
 Efficiency 86 %
 Peak intensity 11.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

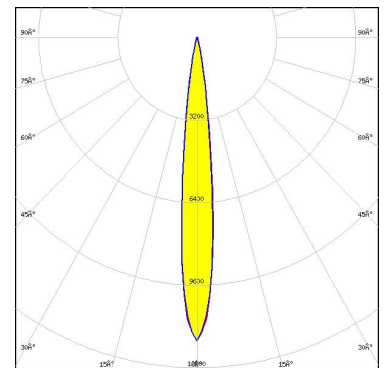

Light distribution files



LED SFH 4714A
 FWHM / FWTM 7.0° / 14.0°
 Efficiency 84 %
 Peak intensity 26 cd/lm
 LEDs/each optic 1
 Light colour/type IR
 Required components:

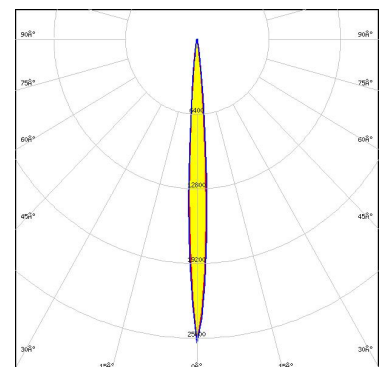


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED SFH 4715AS
FWHM / FWTM 13.0° / 25.0°
Efficiency 88 %
LEDs/each optic 1
Light colour/type IR
Required components:

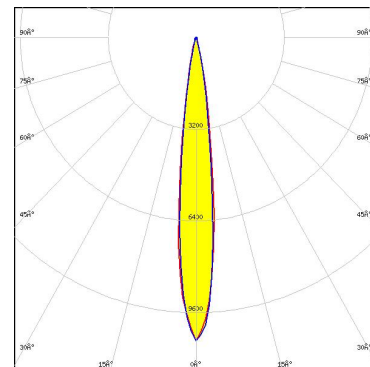

Light distribution files

OSRAM
Opto Semiconductors


LED SFH 4715S
FWHM / FWTM 13.0° / 24.0°
Efficiency 87 %
LEDs/each optic 1
Light colour/type IR
Required components:

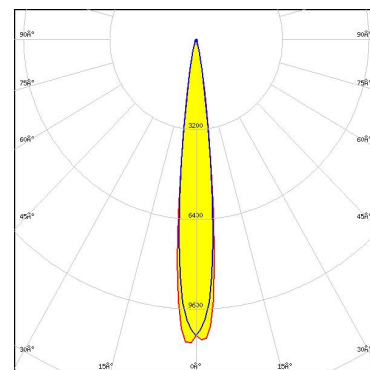

Light distribution files

OSRAM
Opto Semiconductors

LED SFH 4725S
FWHM / FWTM 13.0° / 24.0°
Efficiency 87 %
LEDs/each optic 1
Light colour/type IR
Required components:

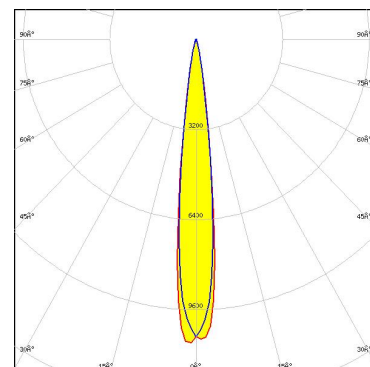


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors



LED SFH 4726S
FWHM / FWTM 9.0° / 17.0°
Efficiency 84 %
LEDs/each optic 1
Light colour/type IR
Required components:

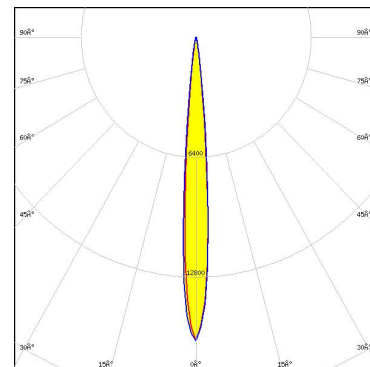

Light distribution files

SEAGULL
SEOUL SEMICONDUCTOR


LED Z5M4-E1
FWHM / FWTM 20.0° / 28.0°
Efficiency 89 %
Peak intensity 6.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

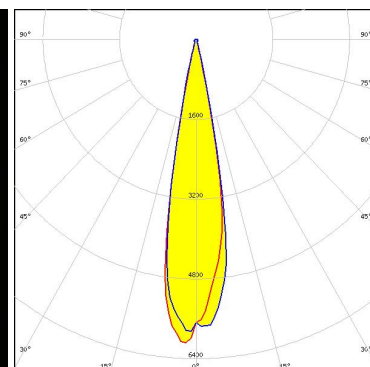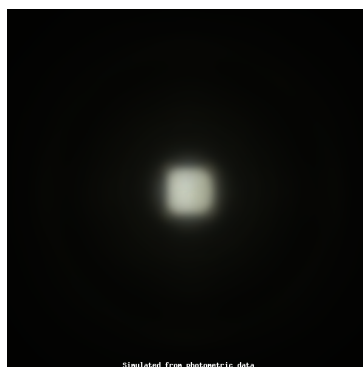

Light distribution files

SEAGULL
SEOUL SEMICONDUCTOR

LED Z8Y22
FWHM / FWTM 15.0° / 29.0°
Efficiency 80 %
Peak intensity 5.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

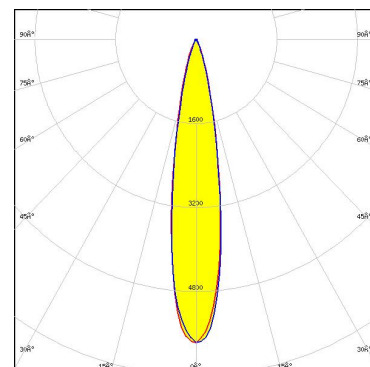

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)