
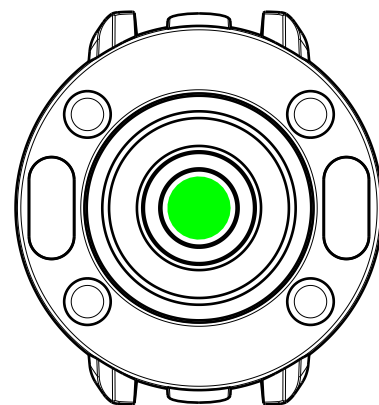



4

C18095_TINA-Y-RS

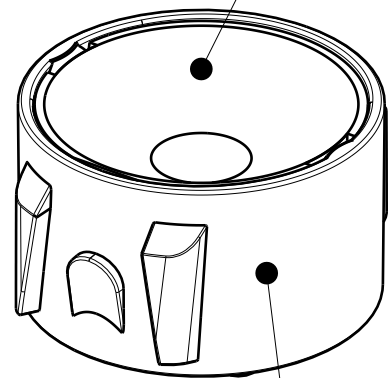


L20165_TINA-Y-SC2-HLD



Recommended PAD design



Clip reference distance after soldering

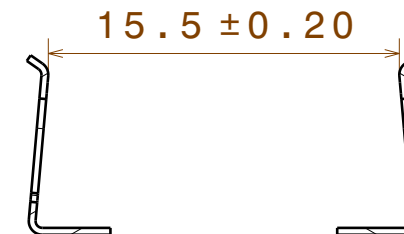


3

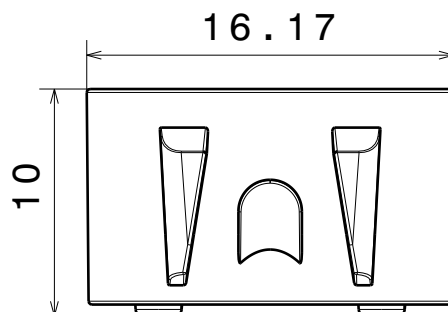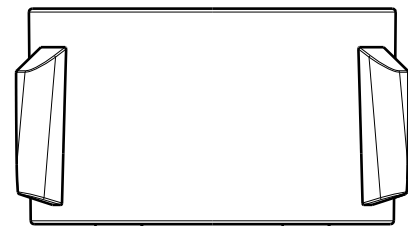


C18696_SOLDER-CLIP-2

Bottom of solder clip underneath holder
Opening of solder clip facing holder

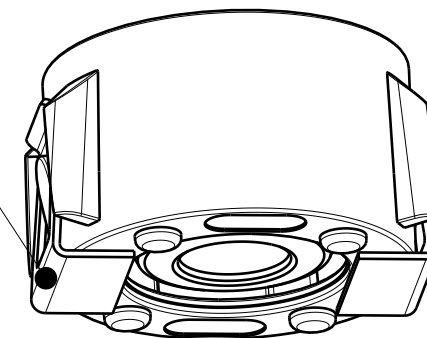

2

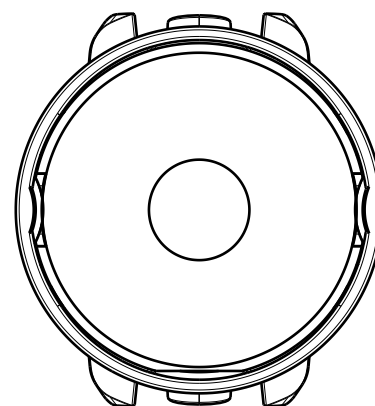

LP20169_TINA-Y-SC2-RS

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C18095_TINA-Y-RS	LENS	1	PMMA	CLEAR
2	L20165_TINA-Y-SC2-HLD	HOLDER	1	PC	BLACK

MECHANICAL DRAWING


PRODUCT

TINA-Y-SC2-RS

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 3:1

WEIGHT -

A3 SHEET 1 / 1

Notes

PCB or heatsink level.
LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com
For more details about installation please see LEDiL Installation Guide on www.ledil.com

4

3

2

1