

H

G

F

E


D

C


B

A


C19887\_TINA-Y-WWW

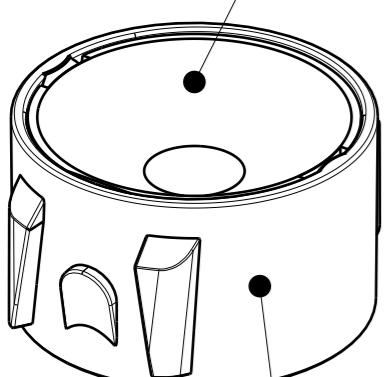


L20165\_TINA-Y-SC2-HLD

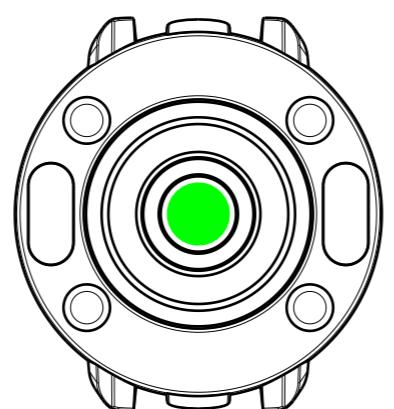




Recommended PAD design

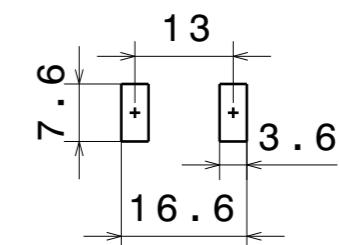

Clip reference distance after soldering

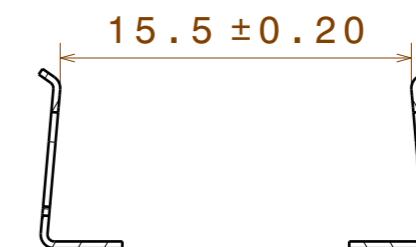

C18696\_SOLDER-CLIP-2  
Bottom of solder clip underneath holder  
Opening of solder clip facing holder

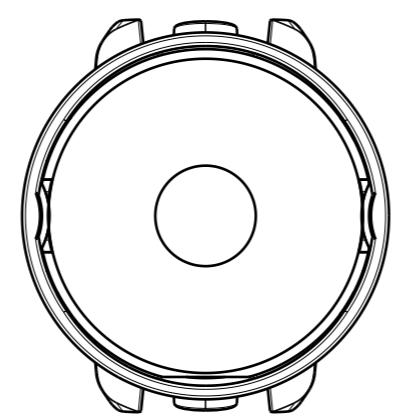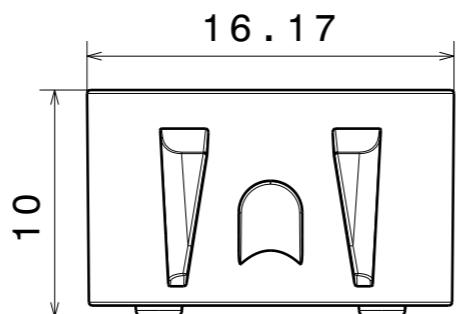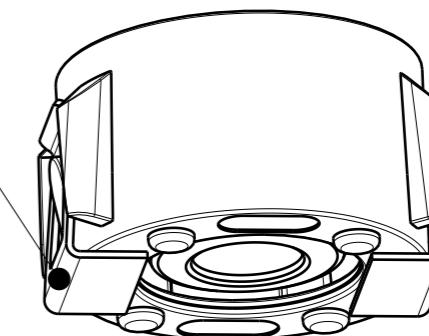

LP20174\_TINA-Y-SC2-WWW

## COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C19887_TINA-Y-WWW	LENS	1	PMMA	CLEAR
2	L20165_TINA-Y-SC2-HLD	HOLDER	1	PC	BLACK

## MECHANICAL DRAWING


PRODUCT

TINA-Y-SC2-WWW

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.  
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

## FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 3:1

WEIGHT -

A3 SHEET 1/1

## Notes

- PCB or heatsink level.
- LED location
- Ensure LED fitting from a product specific 3D model available from [www.ledil.com](http://www.ledil.com)
- For more details about installation please see LEDiL Installation Guide on [www.ledil.com](http://www.ledil.com)