

H

G

F

E


D

C


B

A


C11417_TINA2-XP-D

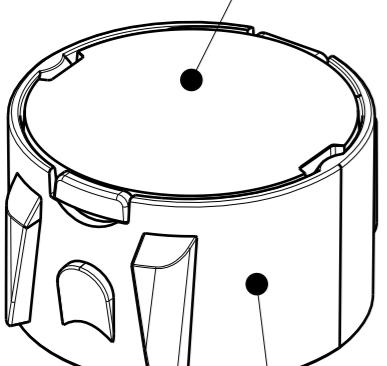






L20167_TINA-SC2-HLD

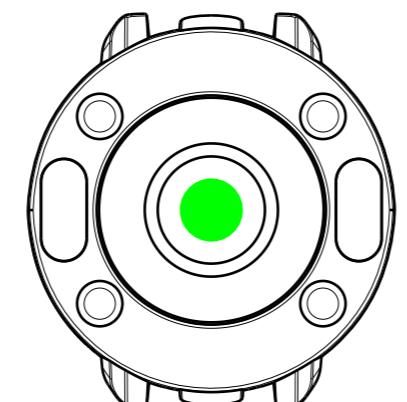

Recommended PAD design

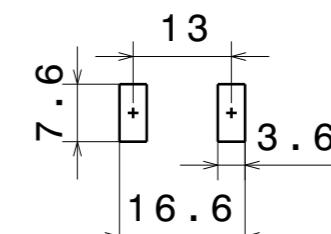

Clip reference distance after soldering

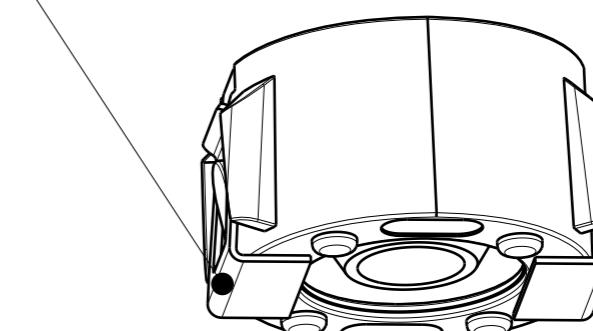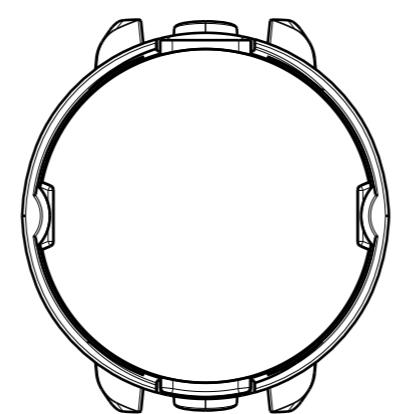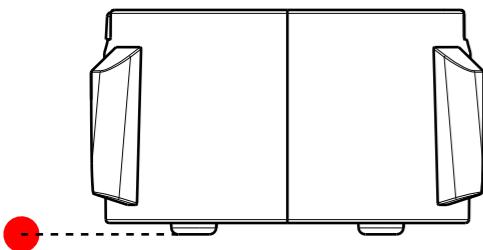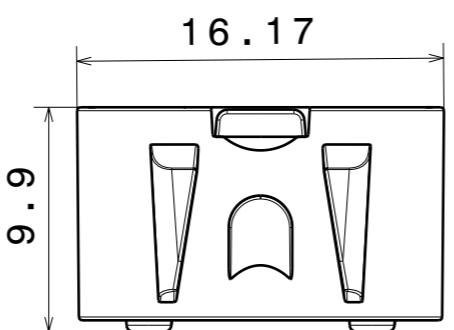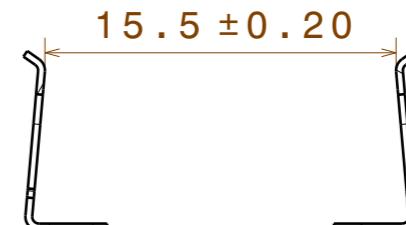

LP20184_TINA-SC2-D

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C11417_TINA2-XP-D	LENS	1	PMMA	CLEAR
2	L20167_TINA-SC2-HLD	HOLDER	1	PC	BLACK


MECHANICAL DRAWING

PRODUCT

TINA-SC2-D

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
 Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 3:1

WEIGHT -

A3 SHEET 1/1

Notes

- PCB or heatsink level.
- LED location
- Ensure LED fitting from a product specific 3D model available from www.ledil.com
- For more details about installation please see LEDiL Installation Guide on www.ledil.com