

H

G

F


E

D


C

B



A

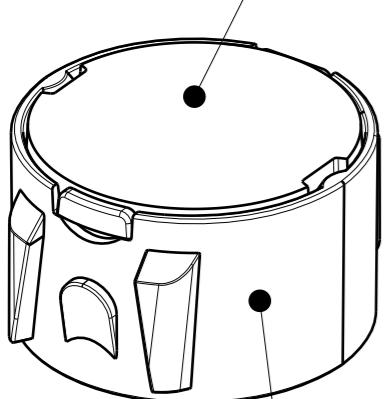


C11050_TINA2-XP-0

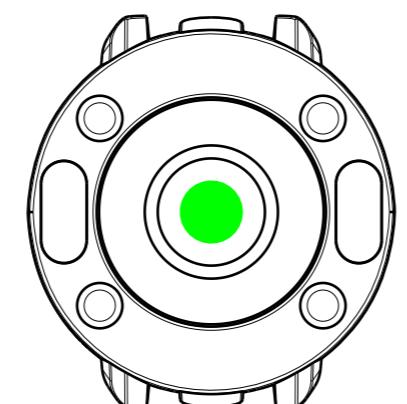

L20168_TINA-SC2-HLD-WHT

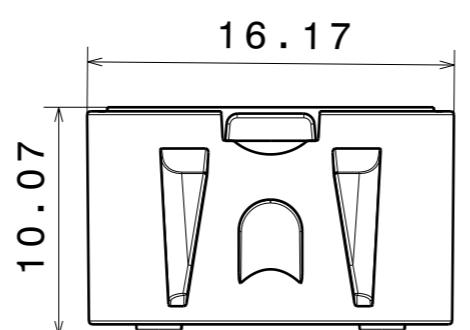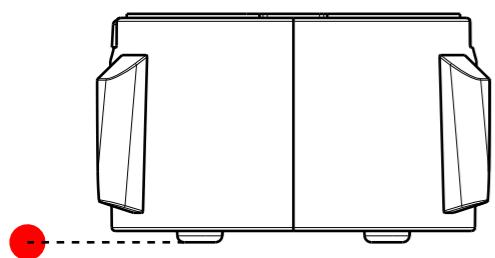


Oval beam direction

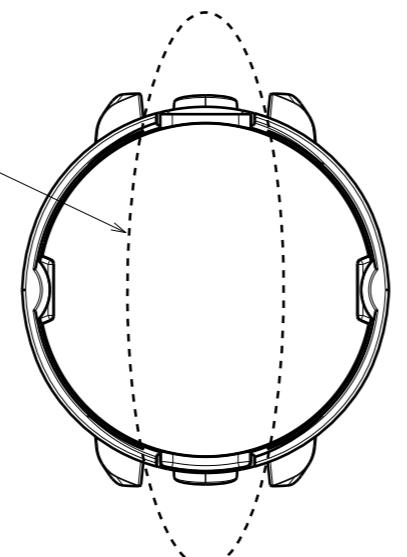


Notes

- PCB or heatsink level.
- LED location
- Ensure LED fitting from a product specific 3D model available from www.ledil.com
- For more details about installation please see LEDil Installation Guide on www.ledil.com

Recommended PAD design

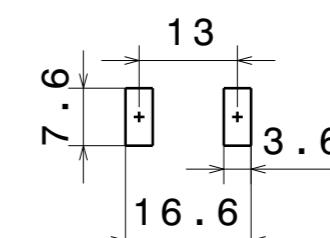


Clip reference distance after soldering

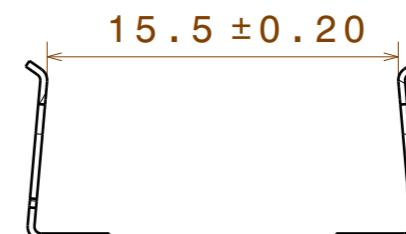

C18696_SOLDER-CLIP-2

Bottom of solder clip underneath holder
Opening of solder clip facing holder

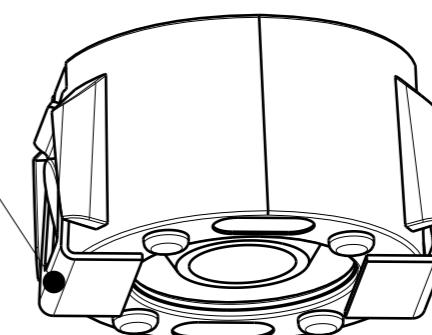

LP20193_TINA-SC2-0-WHT

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C11050_TINA2-XP-0	LENS	1	PMMA	CLEAR
2	L20168_TINA-SC2-HLD-WHT	HOLDER	1	PC	WHITE


MECHANICAL DRAWING

PRODUCT

TINA-SC2-0

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



SCALE 3:1

WEIGHT -

A3 SHEET 1/1

LEDil

This drawing is the property of LEDil Oy. It may not be copied or otherwise distributed without prior written permission from LEDil Oy.