



4


C15060\_TINA2-O-WAS

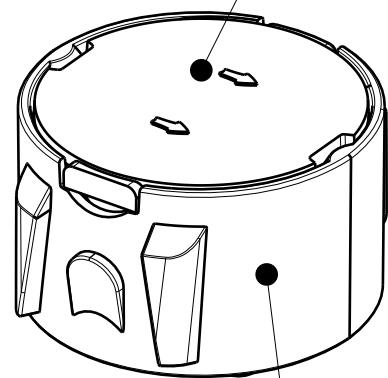


L20168\_TINA-SC2-HLD-WHT

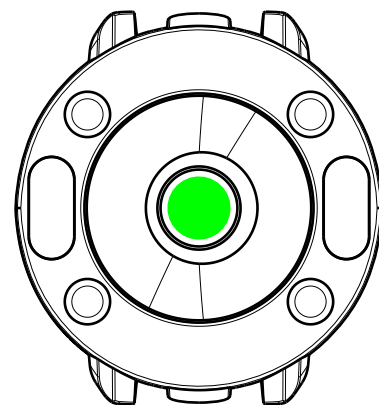



Recommended PAD design




Clip reference distance after soldering

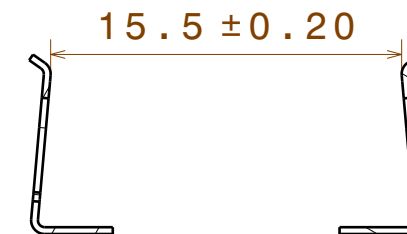

3

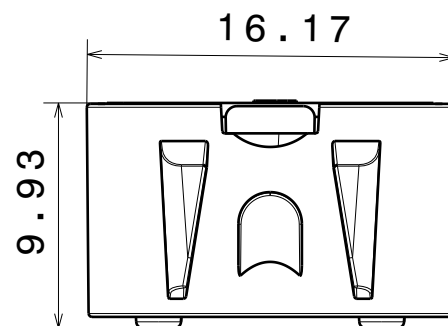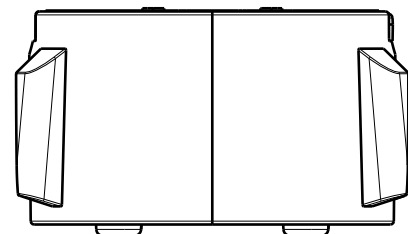


C18696\_SOLDER-CLIP-2  
Bottom of solder clip underneath holder  
Opening of solder clip facing holder

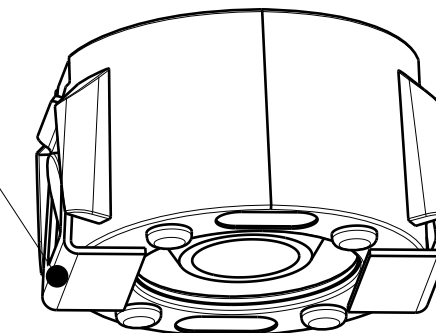

2

Oval-Was beam direction

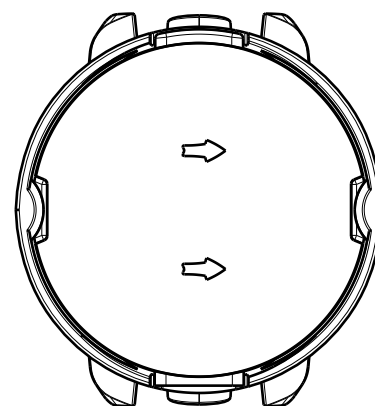

LP20194\_TINA-SC2-O-WAS-WHT

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C15060_TINA2-O-WAS	LENS	1	PMMA	CLEAR
2	L20168_TINA-SC2-HLD-WHT	HOLDER	1	PC	WHITE

MECHANICAL DRAWING


PRODUCT

TINA-SC2-O-WAS

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.  
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 3:1

WEIGHT -

A3 SHEET 1/1

Notes

PCB or heatsink level.
LED location
Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>

4

3

2

1