REV	DATE
004	25.09.2025

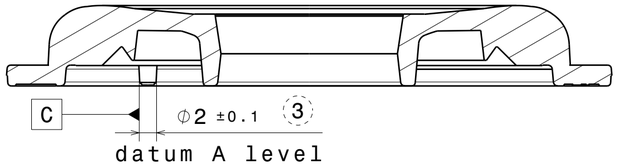

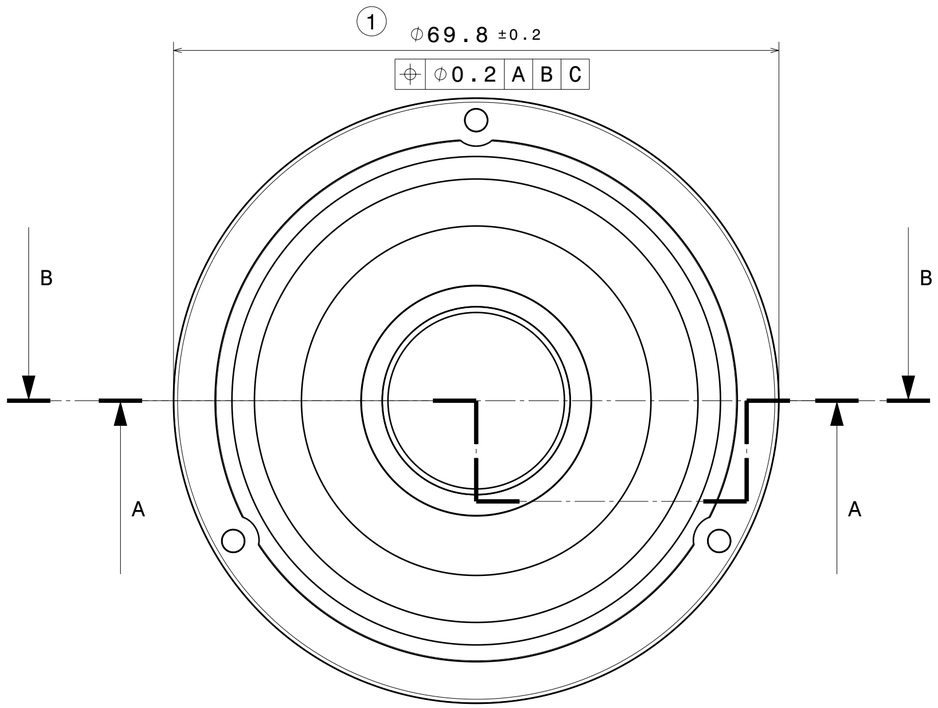

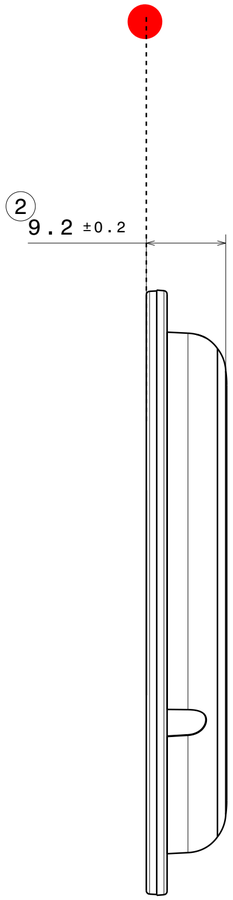

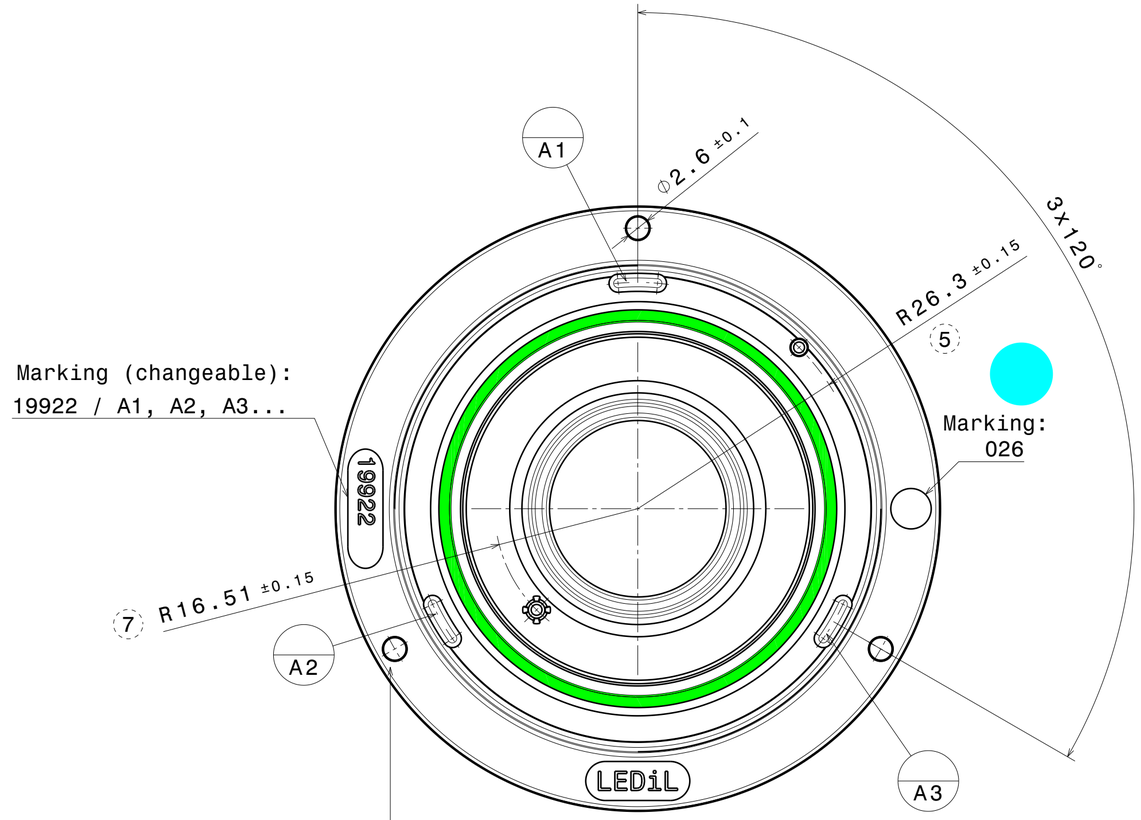

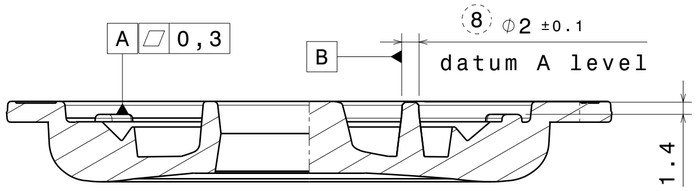



Screws M2,5
Max. torque 0,3Nm

For injection gate and surface quality information, please refer to design info document.

Notes

PCB or heatsink level.
LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com
For more details about installation please see LEDiL Installation Guide on www.ledil.com

PART	TYPE	MATERIAL	COLOR / COATING
C19922_ULLA-UP-D_009_MechanicalModel_001	LENS	PMMA DF	CLEAR / DIFFUSIVE

MECHANICAL DRAWING

PRODUCT
ULLA

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1 | WEIGHT - | A2 SHEET 1/1