

STRADELLA-16-HB-O

Oval beam for high bay aisles

SPECIFICATION:

Dimensions	49.5 x 49.5 mm
Height	8.3 mm
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-16-HB-O	Multi-lens	PMMA	clear	

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16156_STRADELLA-16-HB-O » Box size: 476 x 273 x 292 mm	800		160	8.3




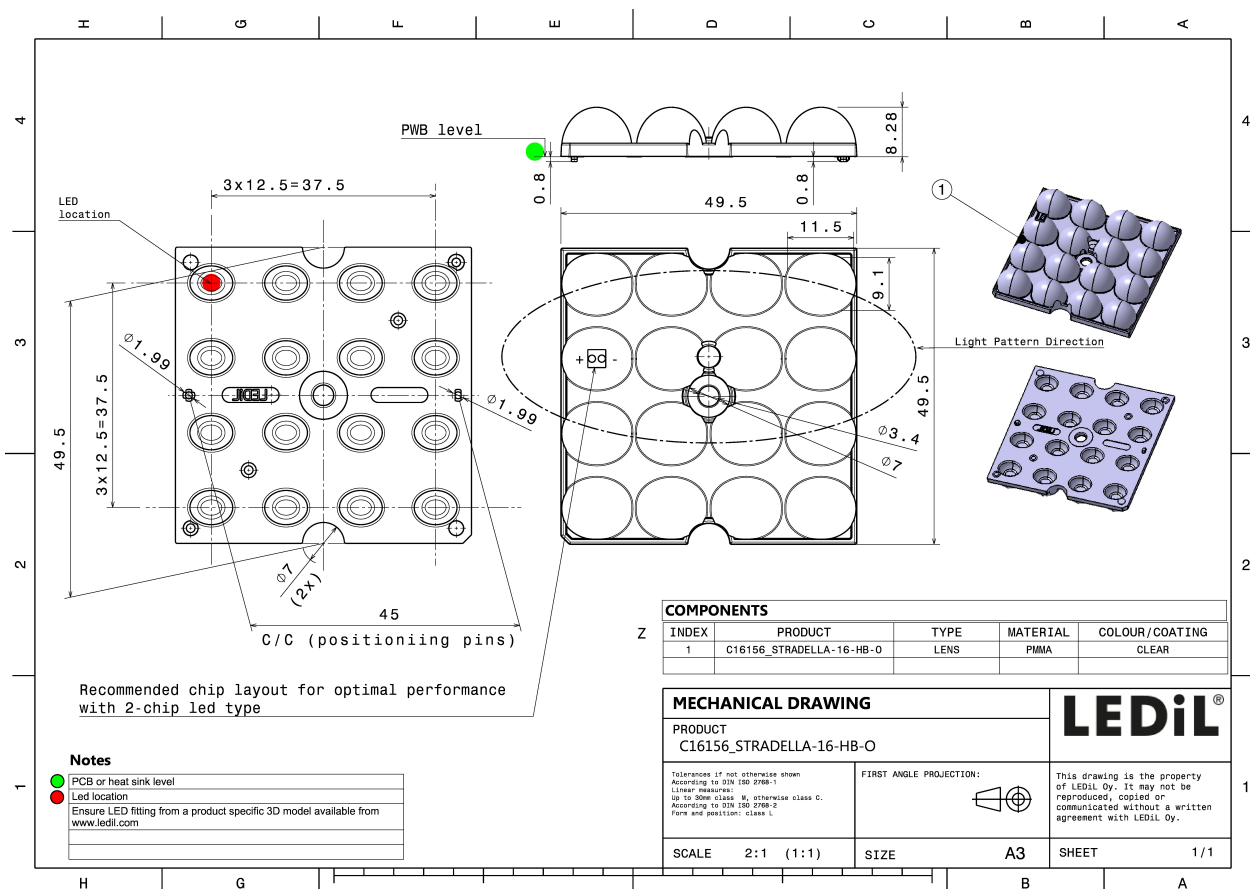


See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):





LED J Series 3030
 FWHM / FWTM $64.0 + 21.0^\circ / 85.0 + 140.0^\circ$
 Efficiency 96 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

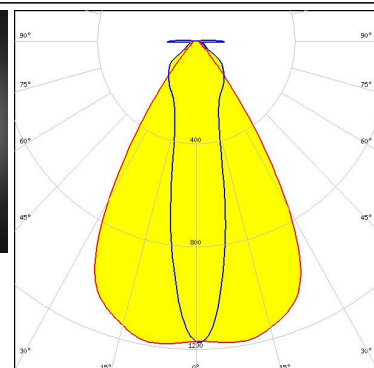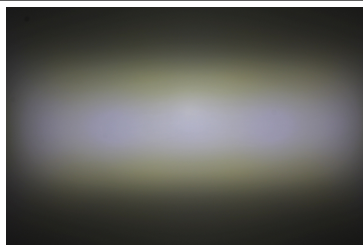



LED EHP-223.5x50-1604-xx-70-LS30-06-NTC
 FWHM / FWTM $64.0 + 20.0^\circ / 85.0 + 140.0^\circ$
 Efficiency 97 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

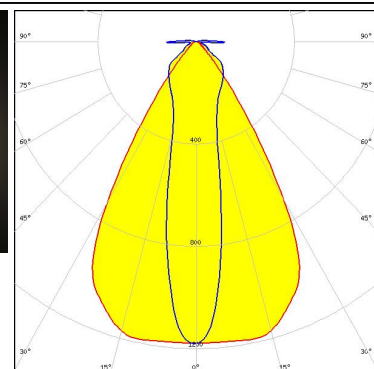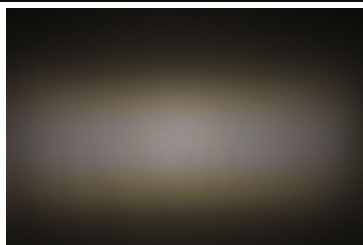

LED NFSx757D
 FWHM / FWTM $62.0 + 19.0^\circ / 83.0 + 102.0^\circ$
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

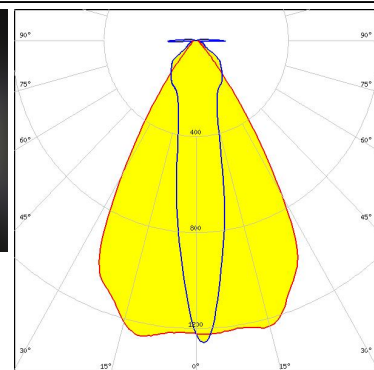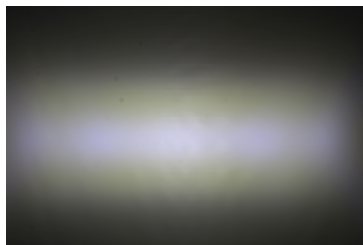



LED NFSx757G
 FWHM / FWTM $63.0 + 20.0^\circ / 84.0 + 103.0^\circ$
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

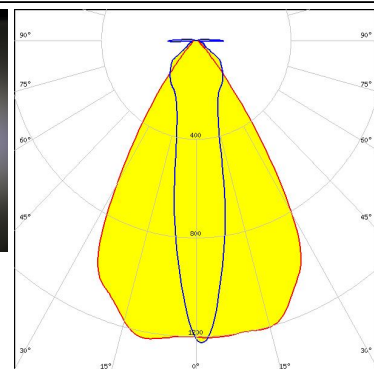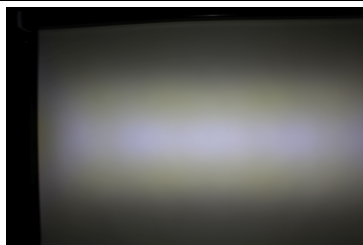

OPTICAL RESULTS (MEASURED):





LED NVSW319B
 FWHM / FWTM 72.0 + 24.0° / 93.0 + 109.0°
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

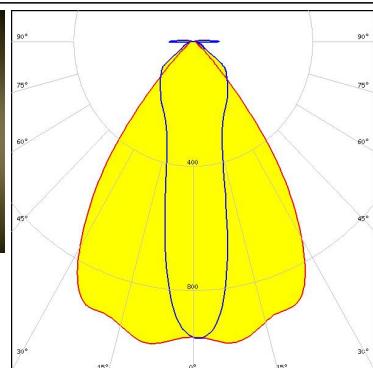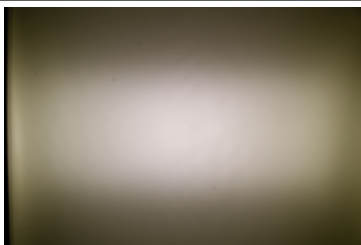

OSRAM


LED PrevaLED Brick MP 4x16
 FWHM / FWTM 64.0 + 20.0° / 85.0 + 103.0°
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

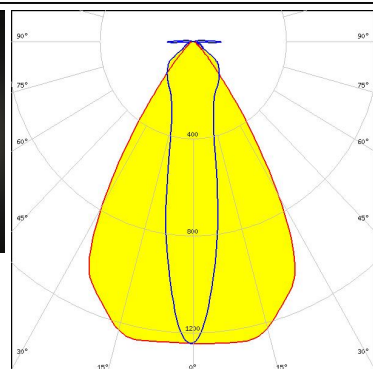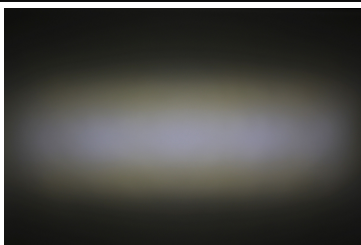

OSRAM

Opto Semiconductors



LED Duris S5 (2 chip)
 FWHM / FWTM 63.0 + 20.0° / 84.0 + 177.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour Purple
 Required components:

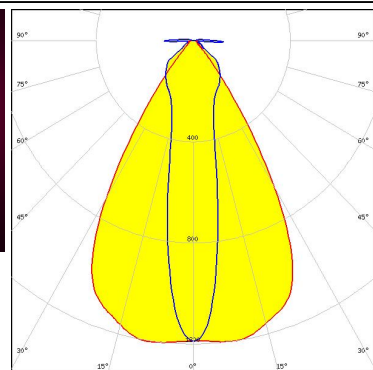

OSRAM

Opto Semiconductors

LED Duris S5 (Single chip)
 FWHM / FWTM 62.0 + 17.0° / 81.0 + 178.0°
 Efficiency 94 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

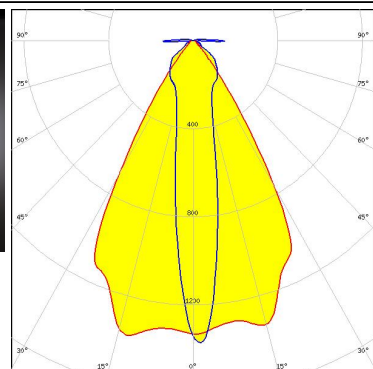
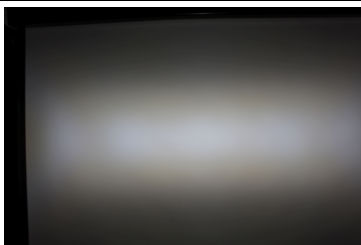


OPTICAL RESULTS (MEASURED):

OSRAM



Opto Semiconductors

LED OSCONIQ S 3030 (QSLR31)
FWHM / FWTM 64.0 + 21.0° / 84.0 + 103.0°
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

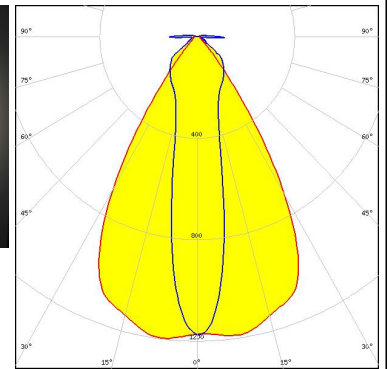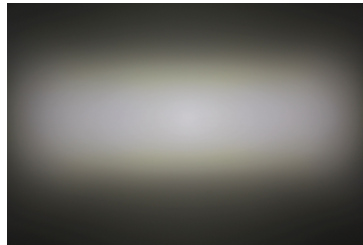



PHILIPS

LED Fortimo FastFlex LED 4x16 DHE G4
FWHM / FWTM 63.0 + 20.0° / 84.0 + 103.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

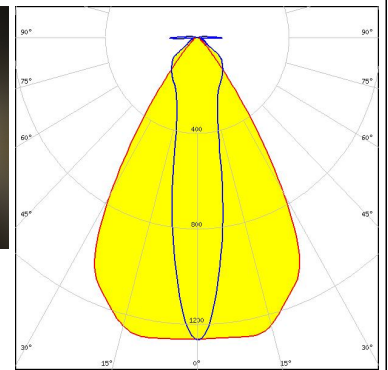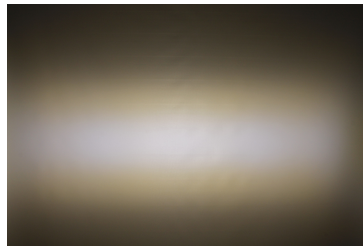


SAMSUNG

LED HiLOM RM64 (LM301B)
FWHM / FWTM 64.0 + 20.0° / 85.0 + 103.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

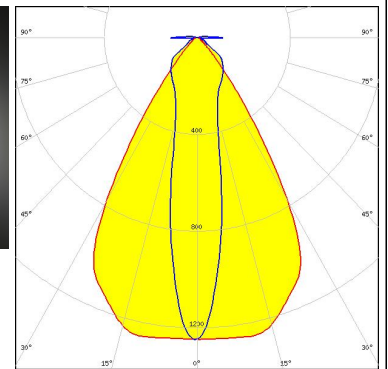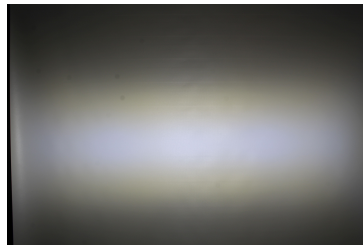

SAMSUNG



LED LM231 A/B
FWHM / FWTM 62.0 + 15.0° / 80.0 + 136.0°
Efficiency 94 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

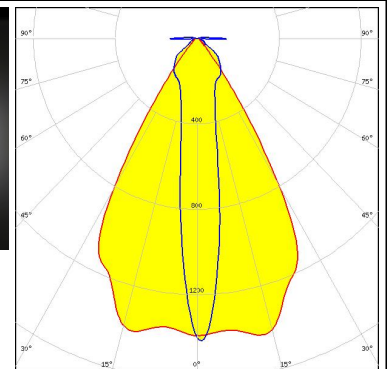



OPTICAL RESULTS (MEASURED):





LED XLE-S44XTEHE (XT-E HE)
 FWHM / FWTM 66.0 + 21.0° / 90.0 + 181.0°
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

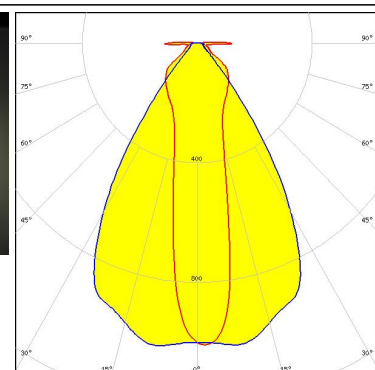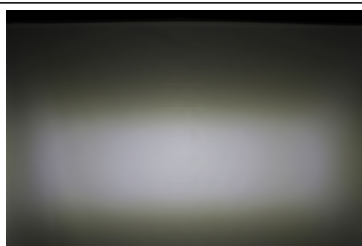



LED SEOUL 3030
 FWHM / FWTM 64.0 + 20.0° / 83.0 + 179.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

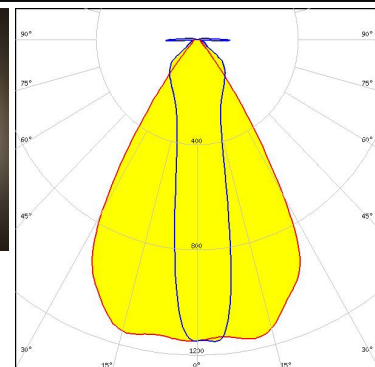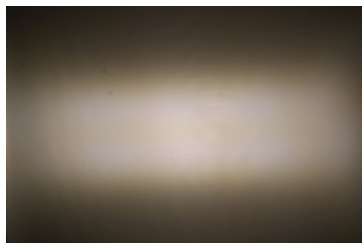

LED SEOUL DC 3030
 FWHM / FWTM 61.0 + 16.0° / 79.0 + 135.0°
 Efficiency 94 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

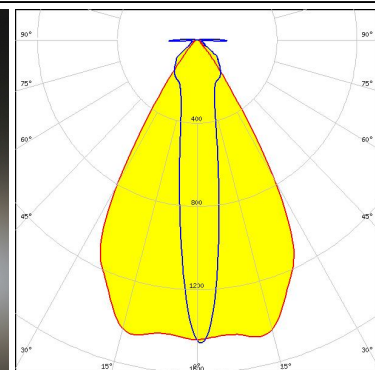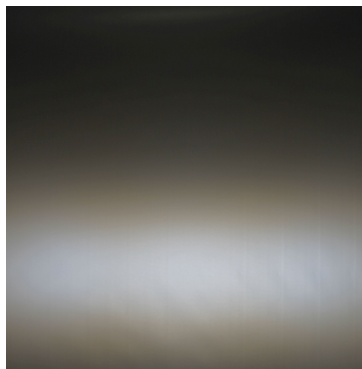



LED Z5M3
 FWHM / FWTM 67.0 + 24.0° / 91.0 + 179.0°
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

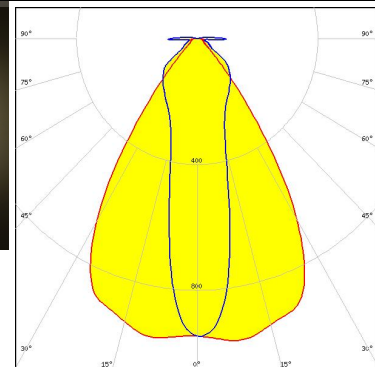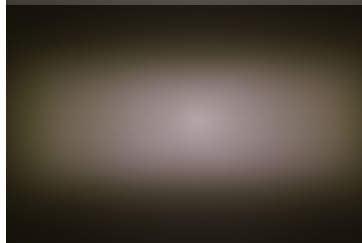

OPTICAL RESULTS (MEASURED):

TRIDONIC

LED RLE 4x16 4000lm MP ADV2 OTD
FWHM / FWTM 64.0 + 19.0° / 84.0 + 102.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

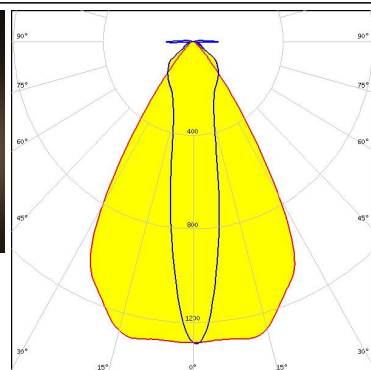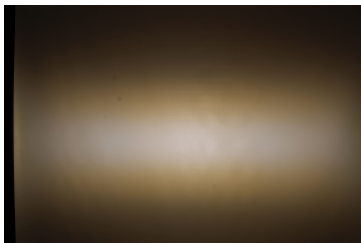


TRIDONIC

LED RLE 4x8 2000lm MP ADV2 OTD
FWHM / FWTM 64.0 + 19.0° / 84.0 + 102.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:


OPTICAL RESULTS (SIMULATED):



LED Bridgelux SMD 2835
 FWHM / FWTM 64.0 + 20.0° / 84.0 + 101.0°
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

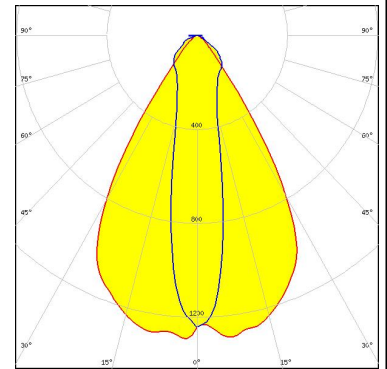


LED CSP 2727 (BXCP)
 FWHM / FWTM 60.0 + 20.0° / 82.0 + 102.0°
 Efficiency 93 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

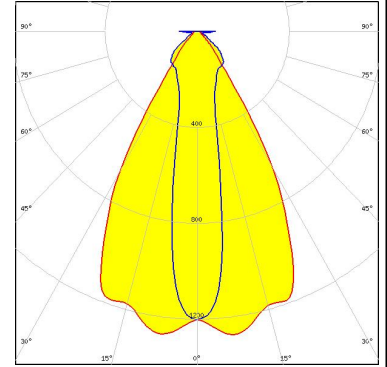


LED CSP 2727 (BXCP)
 FWHM / FWTM 60.0 + 20.0° / 84.0 + 102.0°
 Efficiency 83 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

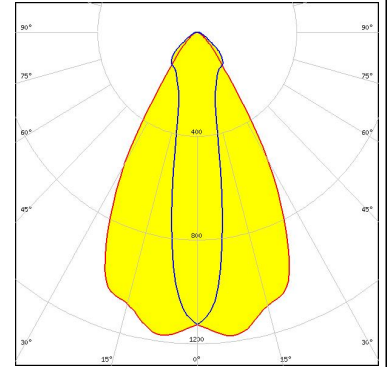


LED XHP35 HI
 FWHM / FWTM 67.0 + 22.0° / 86.0 + 105.0°
 Efficiency 94 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

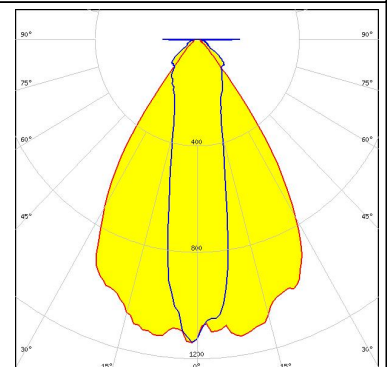


OPTICAL RESULTS (SIMULATED):




LED XP-G2
 FWHM / FWTM 71.0 + 20.0° / -1.0°
 Efficiency 87 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

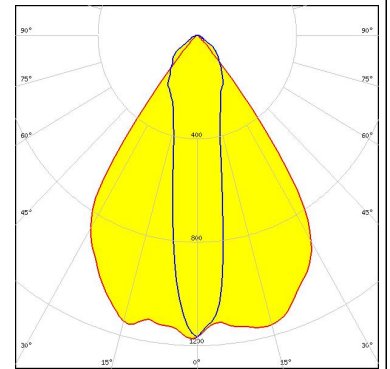


LED XP-G2 HE
 FWHM / FWTM 69.0 + 24.0° / 94.0 + 180.0°
 Efficiency 92 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

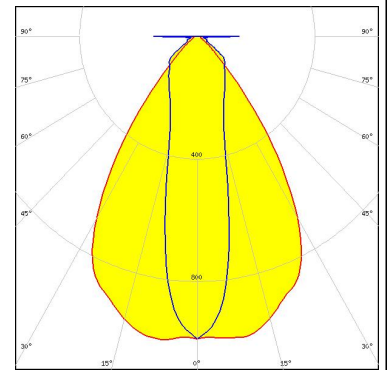

LED XP-G3
 FWHM / FWTM 70.0 + 25.0° / 93.0 + 111.0°
 Efficiency 92 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

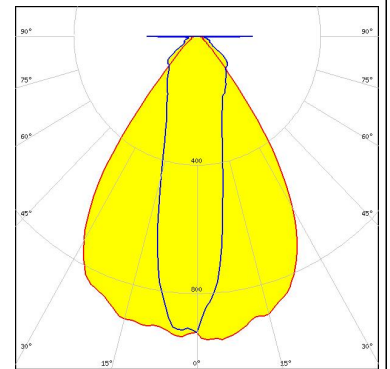


LED XT-E
 FWHM / FWTM 67.0 + 18.0° / 83.0 + 102.0°
 Efficiency 87 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

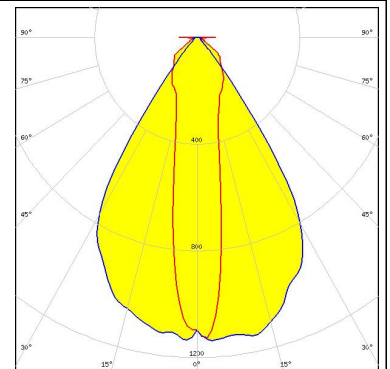

OPTICAL RESULTS (SIMULATED):


LUMILEDS

LED LUXEON 3030 2D (Round LES)
 FWHM / FWTM 50.0 + 16.0° / 80.0 + 89.0°
 Efficiency 91 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

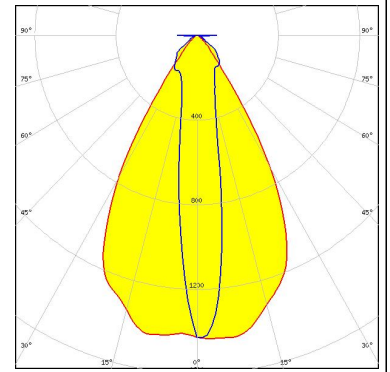


LUMILEDS

LED LUXEON CZ
 FWHM / FWTM 60.0 + 14.0° / 81.0 + 88.0°
 Efficiency 94 %
 Peak intensity 1.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

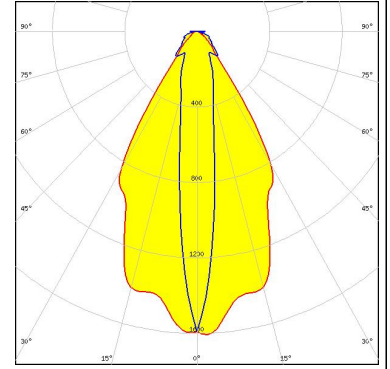


LUMILEDS

LED LUXEON HL1Z
 FWHM / FWTM 58.0 + 12.0° / 72.0 + 84.0°
 Efficiency 93 %
 Peak intensity 1.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

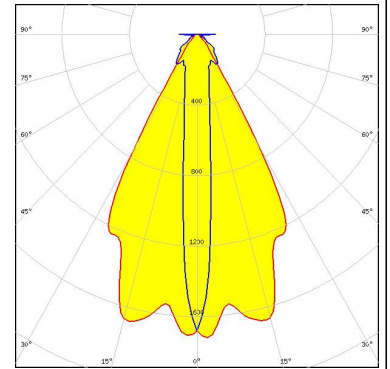

NICHIA


LED NFSWE11A
 FWHM / FWTM 58.0 + 10.0° / 70.0 + 76.0°
 Efficiency 91 %
 Peak intensity 1.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

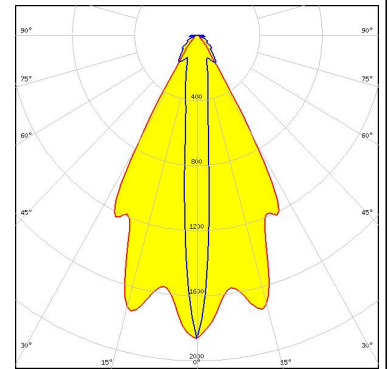


OPTICAL RESULTS (SIMULATED):




LED NVSW519A
 FWHM / FWTM 76.0 + 27.0° / 94.0 + 110.0°
 Efficiency 91 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

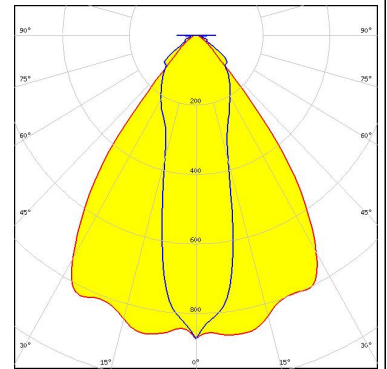

LED Duris E5
 FWHM / FWTM 20.0 + 63.0° / 85.0 + 88.0°
 Efficiency 94 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

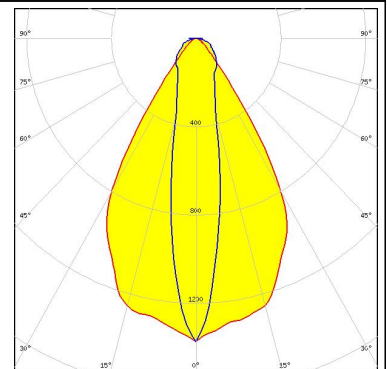


LED OSCONIQ C 2424
 FWHM / FWTM 62.0 + 16.0° / 80.0 + 92.0°
 Efficiency 94 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

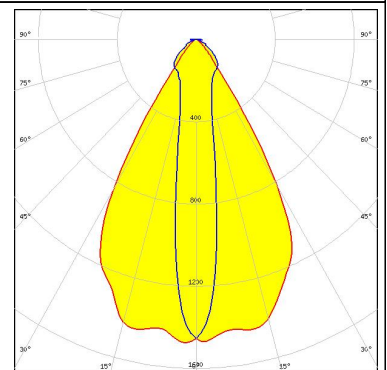

LED OSCONIQ C 3030
 FWHM / FWTM 62.0 + 20.0° / 84.0 + 100.0°
 Efficiency 85 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

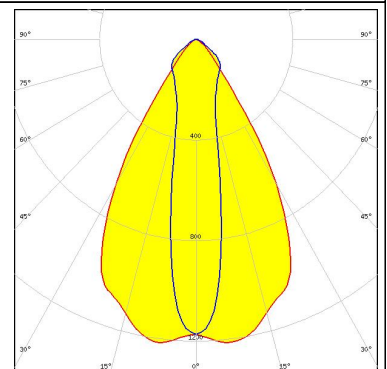


OPTICAL RESULTS (SIMULATED):

OSRAM

Opto Semiconductors


LED OSCONIQ C 3030
FWHM / FWTM 64.0 + 20.0° / 82.0 + 102.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

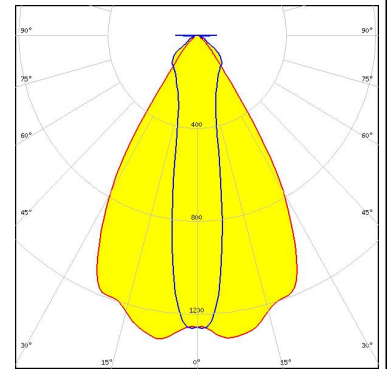

OSRAM

Opto Semiconductors


LED OSCONIQ P 3737 (3W version)
FWHM / FWTM 68.0 + 24.0° / 90.0 + 108.0°
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

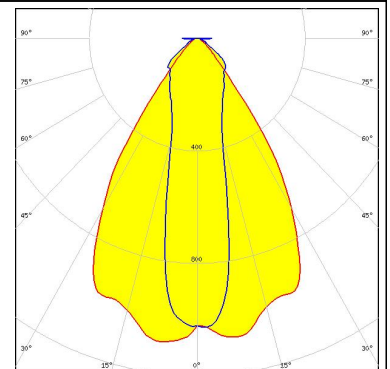

OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 69.0 + 20.0° / 87.0 + 100.0°
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour Red
Required components:

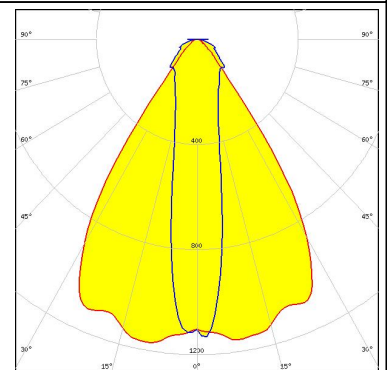


OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 68.0 + 20.0° / 89.0 + 102.0°
Efficiency 86 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass

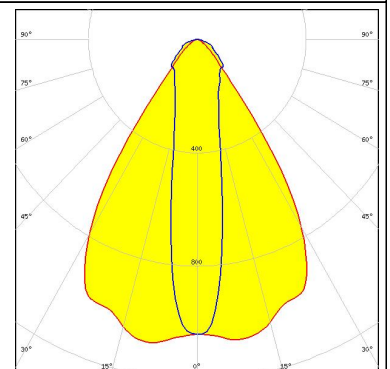

OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH231B
 FWHM / FWTM 61.0 + 22.0° / 84.0 + 98.0°
 Efficiency 92 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

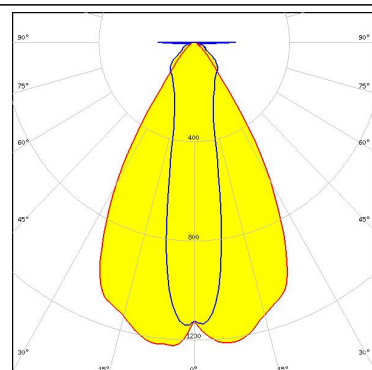

SAMSUNG


LED LH231B
 FWHM / FWTM 60.0 + 22.0° / 84.0 + 100.0°
 Efficiency 82 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

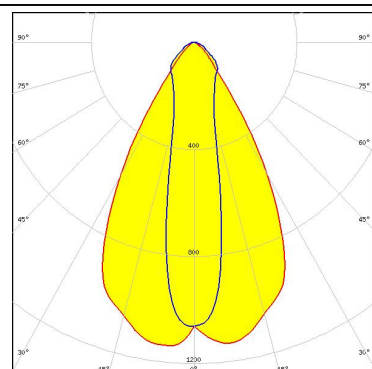

SAMSUNG


LED LM301B
 FWHM / FWTM 19.0 + 63.0° / 83.0 + 97.0°
 Efficiency 93 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

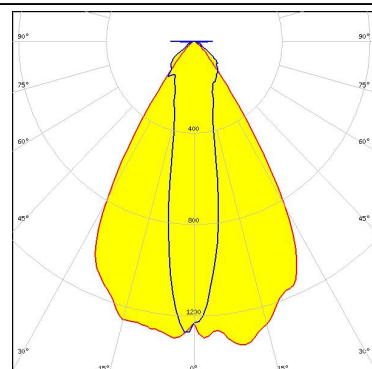


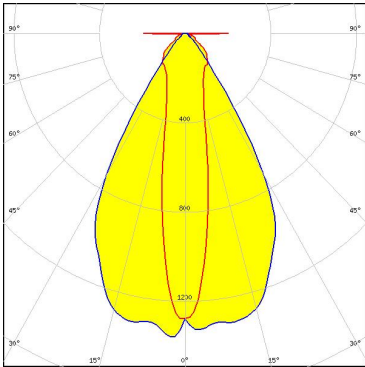

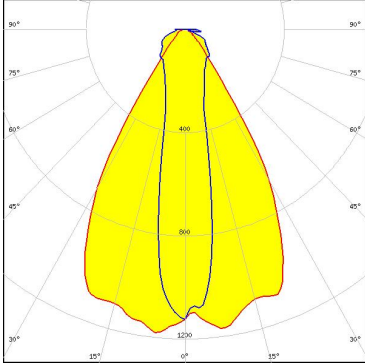
SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C
 FWHM / FWTM 18.0 + 62.0° / 93.0 + 82.0°
 Efficiency 86 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

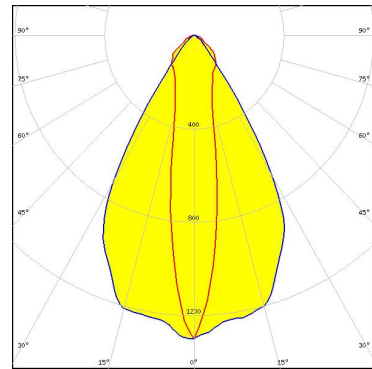

OPTICAL RESULTS (SIMULATED):

 <small>SEOUL SEMICONDUCTOR</small>	<p>LED SEOUL DC 3030C</p> <p>FWHM / FWTM 62.0 + 20.0° / 82.0 + 180.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 1.4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
 <small>SEOUL SEMICONDUCTOR</small>	<p>LED Z8Y22T</p> <p>FWHM / FWTM 63.0 + 20.0° / 85.0 + 101.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 1.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)